

body, HTTP BASIC and DIGEST authentication.

One prominent feature of RESTClient is the ability to save requests, responses and the response body. This is often required for regression testing and proof-of-failure. These options are available inside the *File* menu. The related file extensions are:

1. *.rcq*—The request format. This is a RESTClient-specific XML, format storing the request details.
2. *.rcs*—The response format. This also is an XML.
3. *.rcr*—This is the archive of both request and response XMLs compressed as a zip file.

Jetty Servlet Container is embedded inside RESTClient. A servlet that verbosely prints out the request details is attached to it. To start the server, use the *Tools* menu. The default listening port of this server is 10101. This can be changed during RESTClient start-up using the system property *rc.trace-server.port*.

The most powerful feature of RESTClient is its integrated support for tests. RESTClient has the Groovy programming language embedded (Figure 2). So test classes can be written in Groovy. Test classes are based on JUnit 3.x and tests are attached to each request. For example, a simple test would look like what's shown below:

```
public class SampleClassTest
    extends org.wiztools.restclient.RESTTestCase{

    // Test method names should start with 'test':
    public void testStatus(){
        if(response.getStatusCode() != 200){
            fail("Response status is not 200");
        }
    }
}
```

As you can observe, the test classes need to extend *org.wiztools.restclient.RESTTestCase*. *RESTTestCase* internally extends *junit.framework.TestCase*. The instance of *RESTTestCase* has two predefined instance variables available: *request* and *response*. These instances have various convenient methods to access the *request* and *response* details.

request is of type *org.wiztools.restclient.RoRequestBean*. Useful methods that may be invoked:

- *org.wiztools.restclient.HTTPVersion* getHttpVersion()
- *java.net.URL* getUri()
- *java.util.Map<String, String>* getHeaders()
- *org.wiztools.restclient.RoReqEntityBean* getBody()

response is of type *org.wiztools.restclient.RoResponseBean*. Some common methods that can be invoked on this, are:

- *int* getStatusCode()
- *java.lang.String* getStatusLine()
- *java.util.Map<String, String>* getHeaders()
- *java.lang.String* getResponseBody()

Both the lists are not exhaustive. Please refer to API docs for a complete list of methods that may be invoked.

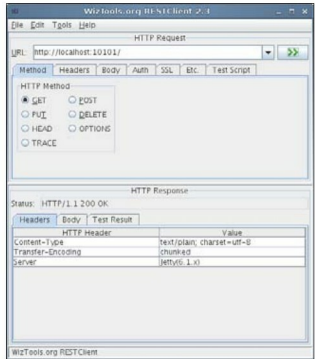


Figure 1: RESTClient Swing interface

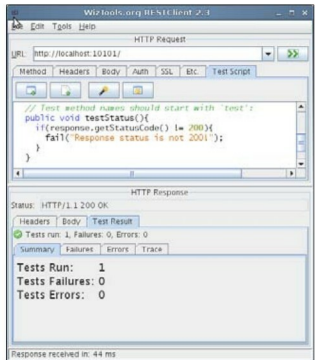


Figure 2: Writing a Groovy test case in RESTClient

The command line

From version 2.3, RESTClient has two binaries: one GUI and one command-line. The command-line tool is used for running requests in a batch and logging their test results. A typical usage is as follows:

```
java -jar restclient-cli-2.3-jar-with-dependencies.jar -o /path/to/responseDir *rcq
```