

Name	Element type	Palette group	Property	Value
AnswerQuestions	Screen	NA	Title	AnswerQuestions
HorizontalArrangement1	HorizontalArrangement	Layout	Width	FillParent
Label1	Label	User interface	Text	'Questions Set:'
QpaperName	TextBox	User interface	Hint width	'Name of the Question Paper'
			FillParent	
VerticalArrangement2	VerticalArrangement	Layout	Width	FillParent
Label2	Label	User interface	Text	'Question'
Answer	TextBox	User interface	Hint Height Width Multiline	'Type the Answer' Automatic 85% checked
Mike	Button	User interface	Image Height Width Multiline	Microphone.png FillParent 15% " "(empty string)
HorizontalArrangement4	HorizontalArrangement	Layout	Width	Automatic
Previous	Button	User interface	Text	Previous
Next	Button	User interface	Text	Next
GoBack	Button	User interface	Text	Done (Go Back)
TinyDB1	TinyDB	Storage		

Table 5: AnswerQuestions screen elements

element is clicked, we invoke the speech input component. We set the value returned from this to the 'Answer' text box.

Controlling the current question with the previous and the next one: We use a question tracker as a number starting at 1, in order to navigate between questions. This needs to be changed and the corresponding question loaded into the screen elements. Also, to do this neatly, we create a procedure loadQuestion, which reads the current question number and loads the question accordingly.

Debugging

During development, I wanted to understand how the tags were created and retrieved. Thus I felt the need to have a debugging interface with which I could walk through the tags and values already created. The DebugScreen is meant for this and is created with simple elements as shown in Table 6.




Figure 6: AnswerQuestions screen

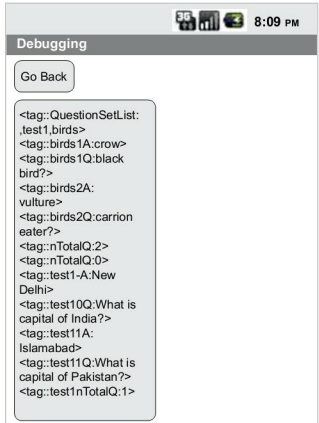


Figure 7: AnswerQuestions screen blocks

The DebugScreen is shown in Figure 7.

The blocks code for DebugScreen looks like what is shown in Figure 8. For operations that you want to perform