

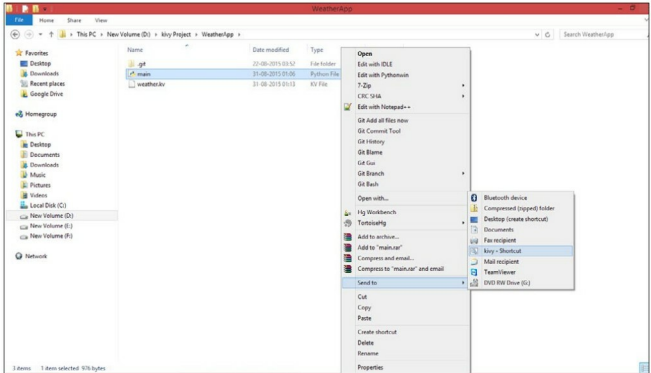


Figure 3: Launch the Kivy application by right-clicking on it



Figure 4: 'Hello world' output

```
>>>root.remove_widget(button)
```

Labels

Labels are one of the basic types of widgets that render text on the screen. The text can be ASCII strings or Unicode strings. Labels have indented blocks of their own to describe the properties of the widget.

```
BoxLayout:
    Label:
        text: "Hello"

    Label:
        text: "World"
```

In the above example, `BoxLayout` is the root widget and `Label` is its child widget. The label's property is configured by `text`.

Buttons

Buttons are the sub-class of labels that trigger some action when the button is pressed or released. Labels and buttons use the same configuration properties.

The syntax is:

```
button = Button(text='Cyberzonec',font_size=14)
```

Layouts

Kivy has a container widget, which controls the position and size of embedded widgets or child widgets called Layouts. It has two properties named `size_hint` and `pos_hint`, which determine the size and position of children. The values of `size_hint` are given in percentages and not in pixels; and the percentage is indicated as within the range of 0 – 1, where 0 means 0 per cent and 1 is 100 per cent. It also expects values to be `None` or defaults.

You can make a widget with half the width and height of the parent, as follows:

The syntax is:

```
size_hint: .5, .5
```

`Pos_hint` allows the positioning of the widget. It is a dictionary to having `x,y`, `left`, `center_x` and `center_y` as key attributes.

The syntax is:

```
pos_hint : {'x': 0, 'y':1}
```

The Layout class cannot be directly used – its sub-class should be used according to the type of layout one wants to