

Configuring the FreeIPA server:

After installation, you need to configure the FreeIPA server, which can be done using the following command:

```
# ipa-server-install
```

`ipa-server-install` is an interactive script which will ask the administrator a few basic questions like the directory server password, DNS forwarder name, etc. This command will gather all the required information from the administrator and configure all the required services.

The user can check other configurable parameters of the `ipa-server-install` command by using the `man ipa-server-install` command.

Here is a quick, non-interactive command for installing the FreeIPA server:

```
# ipa-server-install --ip-address
10.10.10.1 -r example.com -p 'Password'
-a 'Password' --setup-dns --forwarder
10.10.10.254 -U
```

For more information about various parameters, see `man ipa-server-install` or `ipa-server-install --help`

Check the installation by using the following command:

```
# ipa --version
```

If admins want to uninstall FreeIPA server, they can use the following command:

```
# ipa-server-install --uninstall
```

The user can also specify the `-U` option for non-interactive uninstallation of the FreeIPA server. Please remember that this step is irreversible and removes all configuration related to the current FreeIPA server. Uninstallation logs are located in `/var/log/ipaserver-uninstall.log`.

Getting started with FreeIPA server

FreeIPA provides both command line and a Web user interface for easy management

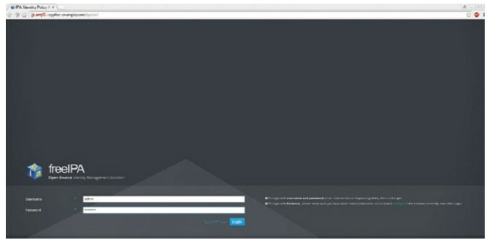


Figure 1: Login page



Figure 2: Dashboard



Figure 3: Add a user

and administration of various services and for the configuration required. It uses a role based authentication system where the admin user is the privileged user.

During installation, an administrative user called 'admin' is created. This is used for all administrative tasks in FreeIPA. Use the following command for authenticating as the admin user:

```
$ kinit admin
```

This command will prompt the user for the administrator password, which was given at the time of installation with option `-a`, viz., `Admin password`.

Performing simple tasks using

admin users: The simplest task in FreeIPA is creating users. The administrator can create users in FreeIPA using the following command.

Keep in mind that you need to have a valid Kerberos ticket for the admin user.

```
$ ipa user-add
```

This command is also interactive, just like `ipa-server-install`. After providing the required information, a user is created in the FreeIPA system. But, currently, the password for the newly created user is not set. The administrator can set a password using the following command:

```
$ ipa passwd <username>
```

The password provided at this prompt is temporary. When the user first logs into the system, the user is prompted to change the temporary password.

A newly created user can