

Figure 2: Files and folders inside Sage directory

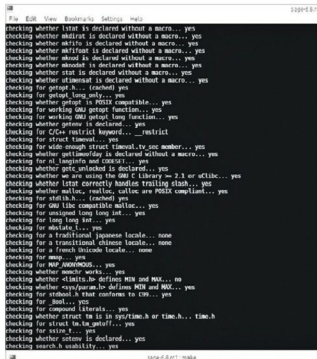


Figure 3: Building Sage

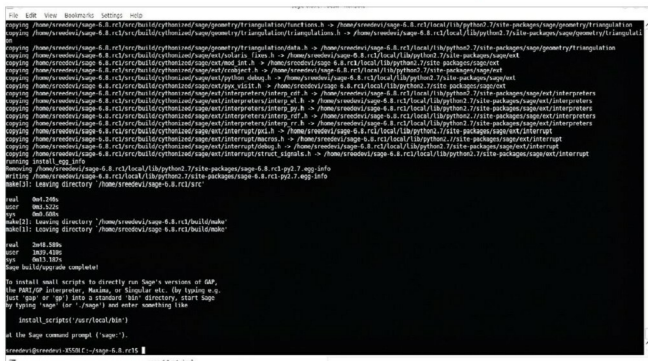


Figure 4: Successful completion of Sage build

To install Sage, type:

```
sudo apt-get install gcc make m4 perl binutils tar
```

To download the source code for Sage, go to <http://www.sagemath.org/download-source.html>; you will see a list of mirrors. Select one and download it. This might take time. I downloaded the developer version. This is a *tar* file containing the source code for Sage.

We can also do this from the command line using the `wget` command, as shown below:

```
wget http://mirrors.ustc.edu.cn/sagemath/devel/sage-6.8.rc1.
tar.gz -C
```

You can select a download server of your convenience; I selected the one given above and hence downloaded *sage-6.8.rc1.tar.gz*.

Extracting the *tar* file

My *tar* file is of the *.tar.gz* format, so I used the following command to extract it:

```
tar -xvzf sage-6.8.rc1.tar.gz
```