

```
--peerAddresses localhost:9051 --tlsRootCertFiles $ORG2_CA
\
-c '{"function":"InitLedger","Args":[]}'

peer chaincode invoke -o localhost:7050 \
--ordererTLSHostnameOverride orderer.example.com --tls
--cafile $ORDERER_CA \
-C mychannel -n basic \
--peerAddresses localhost:7051 --tlsRootCertFiles $ORG1_CA
\
--peerAddresses localhost:9051 --tlsRootCertFiles $ORG2_CA
\
-c '{"function":"CreateAsset","Args":["Asset-2","blue","5",
"Suyash","10000"]}'

Wait a few seconds for the block to commit, and then query
the ledger:
peer chaincode query -C mychannel -n basic -c
'{"Args":["ReadAsset","Asset-2"]}'

The ledger returns:
{
  "AppraisedValue": 10000,
  "Color": "blue",
  "ID": "Asset-2",
  "Owner": "Suyash",
  "Size": 5
}
```

Experiment 2 — Transfer ownership and audit the ledger: Transfer Asset-2 from Suyash to Arun:


```
peer chaincode invoke -o localhost:7050 \
--ordererTLSHostnameOverride orderer.example.com --tls
--cafile $ORDERER_CA \
-C mychannel -n basic \
--peerAddresses localhost:7051 --tlsRootCertFiles $ORG1_CA
\
--peerAddresses localhost:9051 --tlsRootCertFiles $ORG2_CA
\
-c '{"function":"TransferAsset","Args":["Asset-2","Arun"]}'

Query the asset again to confirm:
peer chaincode query -C mychannel -n basic -c
'{"Args":["ReadAsset","Asset-2"]}'
{
  "AppraisedValue": 10000,
  "Color": "blue",
  "ID": "Asset-2",
  "Owner": "Arun",
  "Size": 5
}
```

Finally, pull the entire ledger state to confirm Asset-2 appears alongside the six defaults:

```
peer chaincode query -C mychannel -n basic -c
'{"Args":["GetAllAssets"]}'
```

The original state where Suyash owned the asset is not visible in the current state, but it is permanently recorded in the blockchain's transaction history. No record can be altered

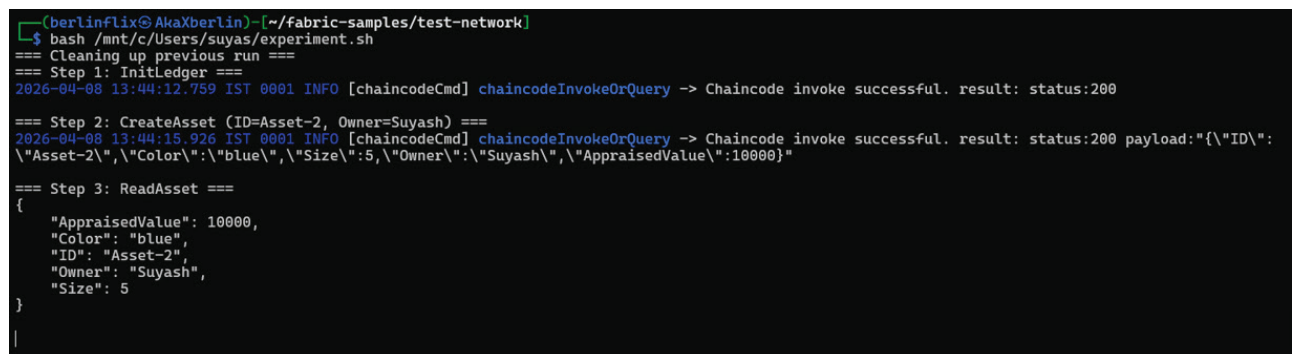

```
(berlinflinx@AkaXberlin)~/fabric-samples/test-network
$ bash /mnt/c/Users/suyas/experiment.sh
=== Cleaning up previous run ===
=== Step 1: InitLedger ===
2026-04-08 13:44:12.759 IST 0001 INFO [chaincodeCmd] chaincodeInvokeOrQuery -> Chaincode invoke successful. result: status:200

=== Step 2: CreateAsset (ID=Asset-2, Owner=Suyash) ===
2026-04-08 13:44:15.926 IST 0001 INFO [chaincodeCmd] chaincodeInvokeOrQuery -> Chaincode invoke successful. result: status:200 payload: '{"ID": "Asset-2", "Color": "blue", "Size": 5, "Owner": "Suyash", "AppraisedValue": 10000}'

=== Step 3: ReadAsset ===
{
  "AppraisedValue": 10000,
  "Color": "blue",
  "ID": "Asset-2",
  "Owner": "Suyash",
  "Size": 5
}
```

Figure 3: The ledger confirms Asset-2 was created with Suyash as owner

```
=== Step 4: TransferAsset (Suyash -> Arun) ===
2026-04-08 13:44:29.124 IST 0001 INFO [chaincodeCmd] chaincodeInvokeOrQuery -> Chaincode invoke successful. result: status:200 payload: "Suyash"

=== Step 5: ReadAsset ===
{
  "AppraisedValue": 10000,
  "Color": "blue",
  "ID": "Asset-2",
  "Owner": "Arun",
  "Size": 5
}
```

Figure 4: Ownership has moved from Suyash to Arun on the ledger