

```

tasks:
  - name: "RHEL-06-000011 | CAT II | System security
patches and updates must be installed"
    # Also RHEL-06-000008 | CAT I | Vendor-provided
cryptographic certificates must be installed
    yum:
      name: '*'
      state: latest
  - name: "RHEL-06-000005 | CAT II | The audit system must
alert designated staff members"
    lineinfile:
      dest: "/etc/audit/auditd.conf"
      regexp: '^space_left_action'
      line: 'space_left_action = author@shakthimaan.com'

  - name: "RHEL-06-000016 | CAT II | A file integrity tool
must be installed"
    yum:
      name: 'aide'
      state: latest

  - name: "RHEL-06-000018 | CAT II | A file integrity
baseline must be created"

      shell: "aide --init && cp /var/lib/aide/aide.db.new.gz
/var/lib/aide/aide.db.gz"

  - name: "RHEL-06-000019 | CAT I | There must be no /etc/
hosts.equiv or .rhosts file"

```

```

file:
  dest: '{{ item }}'
  state: absent
with_items:
  - { "/etc/hosts.equiv" }
  - { "~/.rhosts" }

  - name: "RHEL-06-000020 | CAT II | The system must use a
Linux Security Module to enforce limits"
    lineinfile:
      dest: "/etc/selinux/config"
      regexp: '^SELINUX='
      line: 'SELINUX=enforcing'

  - name: "RHEL-06-000023 | CAT III | The system must use a
Linux Security Module to limit the privileges"
    lineinfile:
      dest: "/etc/selinux/config"
      regexp: '^SELINUXTYPE='
      line: 'SELINUXTYPE=targeted'

```

You can obtain the entire STIG specification and documents from <https://iase.disa.mil/stigs/os/unix-linux/Pages/index.aspx>. **END** 

By: Shakthi Kannan

The author is a free software enthusiast and blogs at shakthimaan.com.

Continued from page....33



Figure 6: The directory has been created and exported NFS has been mounted

- Mount the exported NFS share on the newly created /mnt/nfsshare directory on the desktop0 system and verify the /etc/fstab entry works as expected:

```
# mount -a
```

- Verify by using the df-h command in the myshare directory shared from server0 as shown in Figure 7. So by following the steps listed above, NFS servers can export their file systems to multiple clients over the network. The NFS protocols transmit data in clear text over the network. However, here the server relies on the client to identify users. So it is not recommended that you

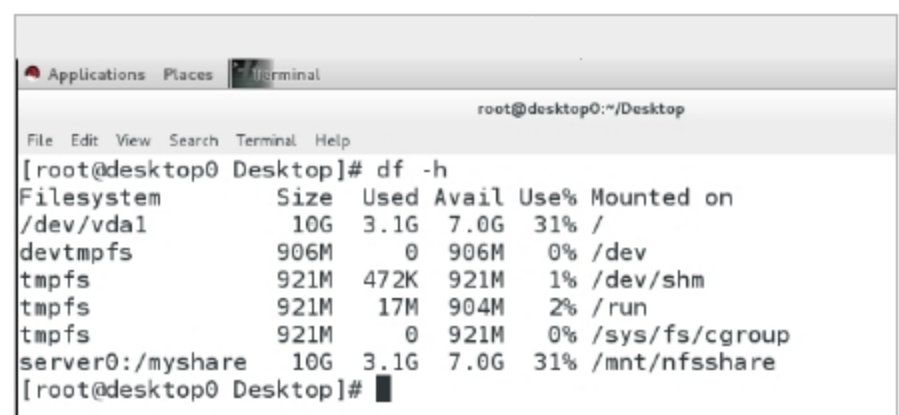


Figure7: Verify the shared directory

export directories with sensitive information without the use of any encryption like Kerberos. In the future, NFS can be scaled by using metadata instead of data—this will increase its speed. **END** 

By: Kshitij Upadhyay

The author is RHCSA and RHCE certified, and loves to write about new technologies. He can be reached at upadhyayk04@gmail.com.