

We need to specify URLs and views for the file. First, let's create a view with the *get* and *post* methods. The *get* method will return all data in JSON format, and the *post* method will save the data after validating it. This can be extended to use the *delete* and *put* logic also. Open the *views.py* file in the *contacts* directory and add the following code:

```
from rest_framework import status
from rest_framework.decorators import
api_view
from rest_framework.response import
Response
from models import Contact
from serializers import
ContactSerializer
```

```
@api_view(['GET', 'POST'])
def contact_list(request):
    """
    // List all snippets, or create a new
    snippet.
    """
    if request.method == 'GET':
        contacts = Contact.objects.all()
        serializer =
        ContactSerializer(contacts, many=True)
        return Response(serializer.
        data)

    elif request.method == 'POST':
        serializer =
        ContactSerializer(data=request.data)
        if serializer.is_valid():
            serializer.save()
            return Response(serializer.
            data, status=status.HTTP_201_CREATED)
        return Response(serializer.
        errors, status=status.HTTP_400_BAD_
        REQUEST)
```

We need to specify URLs to reach this view. Open *urls.py* in the *myproject* directory, where we will include the *contacts* view for processing.

```
from django.conf.urls import include,
url
from django.contrib import admin

urlpatterns = [
```

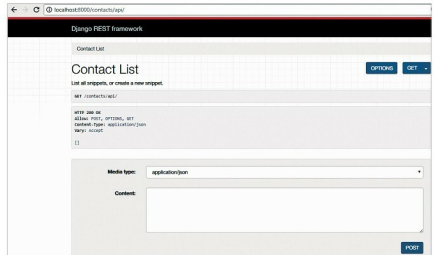


Figure 7: Output of the first rest API

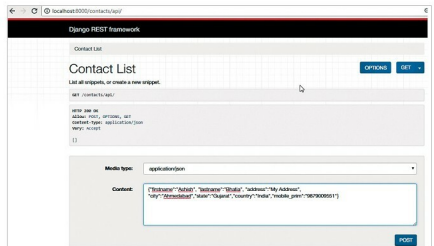


Figure 8: Posting data

```
# Examples:
# url(r'^$', 'myproject.views.
home', name='home'),
# url(r'^blog/', include('blog.
urls')),
url(r'^admin/', include(admin.site.
urls)),
url(r'^contacts/',
include('contacts.urls')),
]
```

Open *urls.py* in the *contacts* directory, which will point to the view we created in *views.py* in this directory.

```
from django.conf.urls import include,
url
from django.contrib import admin
```

```
from contacts import views

urlpatterns = [
    # Examples:
    # url(r'^$', 'myproject.views.
home', name='home'),
    # url(r'^blog/', include('blog.
urls')),
    url(r'^api/', views.contact_list),
]
```

Now that we have done that, *contacts/api* will call our view *contact_list* and display all data from *contacts*. To test this, open a terminal and start the server using the following command:

```
python manage.py runserver
```