

```

arun-dot-com@arun-dot-com:~$ lazydocker

+ docker exec -it 2494d4e50bda02186a06228e3eb4b1a859672603f459b904febc3efa94f6f69d /bin/sh -c eval $(grep
^$(id -un): /etc/passwd | cut -d : -f 7-)

root@2494d4e50bda:/# echo "Hello inside a docker container"
Hello inside a docker container
root@2494d4e50bda:/#

```

Figure 2: Execution of a simple command inside the container

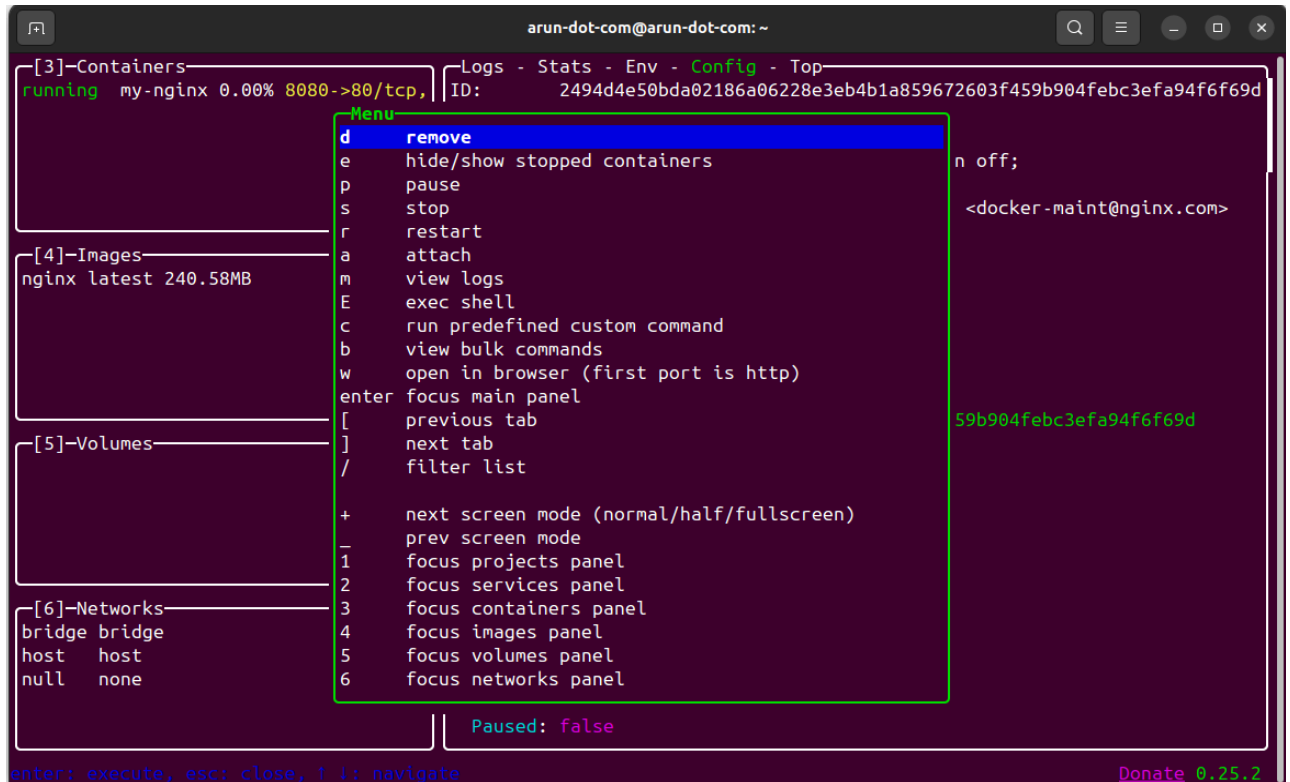


Figure 3: Cleanup menu

build cache as shown in Figure 3. Select the resources you want to remove and confirm. This is the safest way because you can choose what you want to delete.

Monitoring container health

Start Lazydocker by running `$ lazydocker` in your terminal. Once the TUI opens, select the running container you want to monitor and switch to the *Stats* panel. This panel provides real-time information about the container's resource usage, including CPU usage, memory consumption, network I/O, and disk I/O (when available). These metrics update continuously while the

container is running, allowing you to track resource usage and identify potential performance issues.

To monitor the application's activity, switch to the *Logs* panel in Lazydocker. This view displays the container's output in real time and is often the fastest way to identify problems. By watching the logs, you can detect issues such as application crashes, exceptions or stack traces, database connection failures, and containers that are repeatedly restarting.

Docker and Lazydocker together provide a powerful approach to managing modern containerized applications. By understanding Docker architecture, resources, and efficient monitoring practices, teams can improve reliability and streamline operations. Lazydocker enhances productivity by simplifying everyday container management tasks, enabling faster troubleshooting, better visibility, and more effective control over Docker environments. 

 By: Arun Santhosh R.A.

The author is a FOSS enthusiast with an interest in data security and backup.