



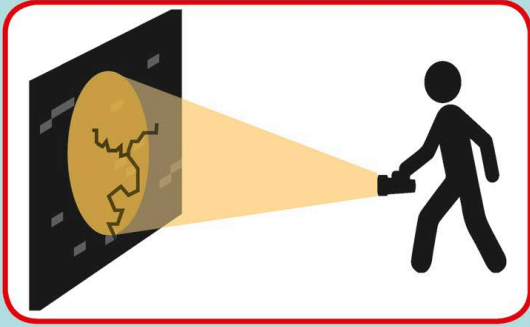


Vulnerability scanners

Hackers use programs called vulnerability scanners to look for weaknesses in a computer's "firewall" (protection) system.

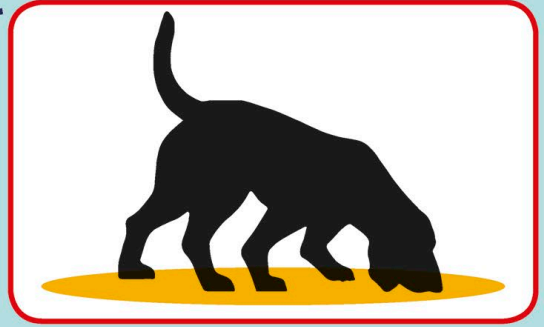


Sniffers

Sniffers monitor information traveling over a computer network. They capture the passwords and user IDs of anyone using the network.

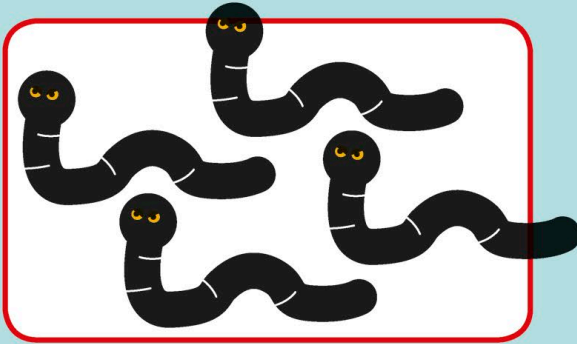

Computer worms

Computer worms infect networks by sending copies of themselves to all the machines in the system. They are harder to stop than viruses because they do not have to attach themselves to a program.

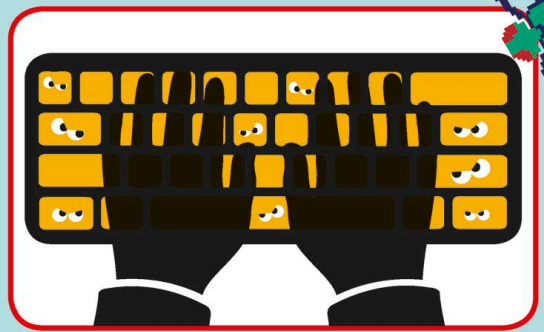

Keylogging

Keylogging lets hackers monitor every key that is pressed on someone's keyboard without them knowing. This lets them see the user's passwords or other private information.

Bugs

A bug is a mistake or fault found in a computer program or system. Bugs can cause a program to run incorrectly—for example, by showing strange text or objects on the screen. They can also cause a program to stop working completely.

```
switch (i) {  
  case 1:  
    do_something(1); break;  
  case 2:  
    do_something(2); break;  
  case 3:  
    do_something(1); break;  
  case 4:  
    do_something(4); break;  
  default:  
    break;  
}
```

This is an error in the code—a bug. Case 1 has incorrectly been copied under case 3.

