




Finally! Industrial powerline communications you can depend on.

First internationally compliant, OFDM-based PLC transceiver for the 10kHz to 490kHz band

The MAX2990 is the first single-chip, powerline-communication (PLC) modem with an integrated microcontroller that saves system cost. It employs advanced broadband techniques to deliver the highest noise immunity, thus providing the most reliable data communication over existing electrical networks. This cost-effective solution specifically targets applications such as automatic meter reading; energy management and load control; lighting control; and building, industrial, and home automation. The MAX2990 complies with international signaling regulations, including CENELEC, FCC, and ARIB.

Combines the PHY and MAC layers in a single chip

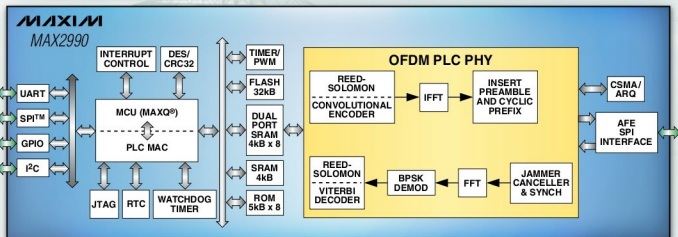

- Integrated microcontroller with 32kB flash memory and 8kB SRAM
- Provides sufficient system resources to run custom applications
- User-programmable frequency selection
- On-chip CSMA/CA and ARQ
- 100kbps data rate at 10kHz to 490kHz, 32kbps at 10kHz to 95kHz
- Fast DES/3DES engine for data security
- Includes forward-error correction (FEC), CRC16, and CRC32
- Extended operating temperature: -40°C to +85°C

EV kit available

MAXQ is a registered trademark of Maxim Integrated Products, Inc.
SPI is a trademark of Motorola, Inc.

www.maxim-ic.com/MAX2990-info



www.em.avnet.com/maxim



www.wtmecc.com

MAXIM
INNOVATION DELIVERED™

For free samples or technical support, visit our website.

Innovation Delivered is a trademark and Maxim is a registered trademark of Maxim Integrated Products, Inc. © 2009 Maxim Integrated Products, Inc. All rights reserved.