

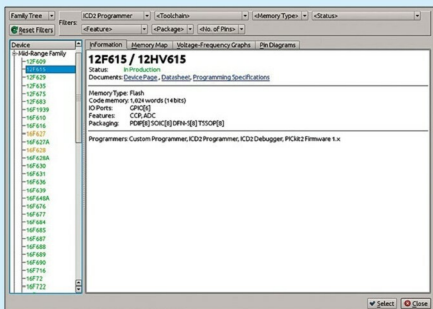


Fig. 2: Device selector

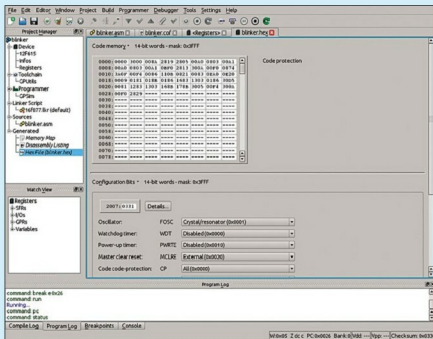


Fig. 3: Hex file editor

Key requirements

- Qt Library (>=v.3.3 or v.4.x)
 - KDE Libraries (>=v.3.3 or v.4.x)—required for graphical interface
 - libusb (>=v.0.1.8)—required for USB support
 - Raw HID device support—required in Linux kernel for USB support
 - Parallel port support and support for user-space parallel port device drivers in Linux kernel
- Apart from the above mentioned compulsory tools, there are certain optional tools for some advanced work using Piklab:
- libreadline—for more advanced command-line interactive mode
 - Pikloops—utility to compute timing loops
 - Wine—for using external Win32 programs (e.g., the C18 compiler)

Some popular competitors

- MPLab
- Arriba IDE for PIC32 MCUs
- Kteclab
- PIC Simulator IDE

sembly language into hex files for the programmer using gpsim.

Eases selected memory. Piklab performs multiple functions. It can read, program, verify and erase the whole device or only the selected memory ranges.

Easy debugging and simulation. Piklab allows an easy and faster simulation of PIC MCUs and also enables an easy debugging with three control options: graphical user interface (GUI), remote processor and command line interface (CLI) using the gpsim simulation tool.

Make yourself familiar

Working with any tool becomes easy if we know its different parts and their functions, before actually starting a project. Read on to know more.

1. Project window. The main window of Piklab gives information about all the files in the project being worked on, allowing one to open all the project files and change the processor type.

2. Editor window. The upper section of the main window contains an editor window that allows one to read and change the source code and hex files.

3. New project. The new project window (in the project window) allows one to make the basic settings to start a new project. It further allows one to either create a new source file by writing the codes in the assembler or to add an existing source file. In case one is not familiar with coding in assembler, he/she can download them from the Internet, which can then be added to the new project.

4. Compile button. Pressing the compile button at the top of the editor window allows one to compile the project. The messages such as compiling and linking can be seen in a small area called compile log, which is present at the lower quarter of the computer