

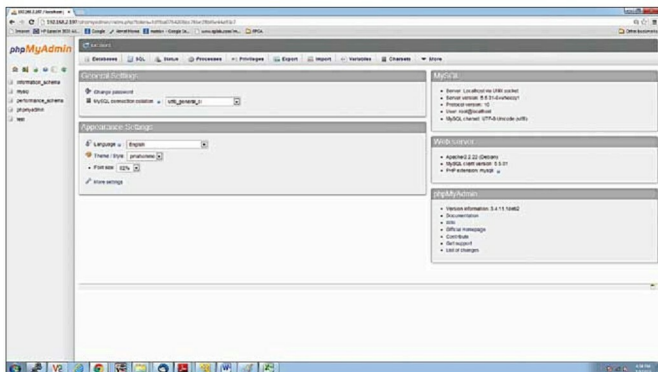


Fig. 13: phpMyAdmin

for PHP that enables the PHP intermediate code to be cached. This can improve the apache2 and other PHP program's performance.

Run the following command to install the APC support system for PHP:

```
apt-get install php-pear php5-dev
apache2-prefork-dev build-essential
make && pecl install apc
```

Now open the php.ini configuration file in nano editor from the location below:

```
nano /etc/php5/apache2/php.ini
```

Under 'Dynamic Extension section,' add the following line:

```
extension=apc.so
```

Stop/start apache2 server.

Install NMAP utilities

Execute the following command to install NMAP utilities:

```
sudo apt-get install nmap
```

```
sudo apt-get install zenmap
```

zenmap is the GUI interface of nmap.

Install phpMyAdmin

phpMyAdmin is one of the most useful tools for working with the MySQL database management system. It is a Web-based control panel that also

includes support for creating and amending your database tables, for entering data into them, and for designing and executing queries. Use the following command to install it:

```
apt-get install libapache2-mod-auth-
mysql php5-mysql phpmyadmin
```

When asked on which server to install, select 'apache2.'

When asked if phpMyAdmin should create MySQL database for itself, select 'yes.'

Now authenticate with MySQL password. After authentication, you are asked to create and confirm password for phpMyAdmin. Accept the default options wherever you will be offered to enter during the installation.

Now edit the php.ini configuration file again:

```
nano /etc/php5/apache2/php.ini
```

Under 'Dynamic Extension' section, add the following line:

```
shellextension=mysql.so
```

To navigate to phpMyAdmin page from the default webpage directory, make a symbolic link in apache2 data directory as follows:

```
cd /var/www
```



Fig. 14: GPG key

```
ln -s /usr/share/phpmyadmin
```

Now from your workstation, you will be able to navigate to 'http://xxx.xxx.xxx/phpmyadmin' (see Figs 12 and 13).

Install webmin administration tool

webmin is an excellent tool for administering all aspects of Linux. Before installing webmin, add the following lines in the source.list file at location '/etc/apt/source.list':

```
deb http://download.webmin.com/
download/repository sarge contrib
```

```
deb http://webmin.mirror.
somesettechsolutions.co.uk/
repository sarge contrib
```

Now install the GPG key with which the repository holding the webmin is signed (see Fig. 14):

```
cd /root
```

```
wget http://www.webmin.com/jcameron-
```