

to parse.

Select **Window->Preferences** from the main Eclipse menu. Navigate to the **General->Workspace->Linked Resources** category, as shown in Fig. 2. Select the 'New' button, and specify the name of the variable and path to the file or folder. In this case, we specify 'UVM_HOME' as the variable and the location where the UVM library is installed.

Creating argument files. Source files include paths, and the other directives are specified to SVEditor via an argument file. Argument files should have a '.f' file extension. For the UBus project, it is necessary to create a single argument file to specify file and include paths. First, select the UBus project in the 'project explorer,' and then select **New->File** from the context menu. Specify the name of the new file as 'ubus.f,' then select 'Finish.'

It is important to determine the file paths that should be specified in the argument file. Currently, the UBus project uses a 'Makefile' to compile the sources. Examine the examples sub-directory of the UBus project, then open the 'Makefile.questa' file.

Locate the comp target within the 'Makefile.' From the compilation command we can determine the files that must be specified to SVEditor (refer Fig. 4).

From this command, we can see the following tasks need to be done:

1. Specify an include path to 'sv' directory
2. Specify 'examples/ubus_tb_top.sv' as a source file

Unfortunately, we're not quite done yet. The UVM examples specify core include paths and root files as part of the definition of the VLOG variable. The VLOG variable is defined in the common 'Makefile.questa' file.

From the definition of the VLOG variable, you can see that we also need to specify the following:

1. Specify an include path to '\$[UVM_HOME]/src'
2. Specify '\$[UVM_HOME]/src/'

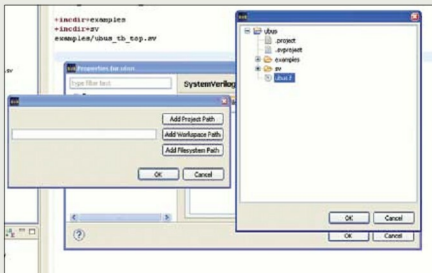


Fig. 4: Configuring the UBUS project to point to the argument file

uvm_pkg.sv' as a source file

3. Enter the following information in the argument:

```
+incdir+${UVM_HOME}/src
${UVM_HOME}/src/uvm_pkg.sv
+incdir+examples
+incdir+sv
examples/ubus_tb_top.sv
```

Note that content-assist for paths in the argument file can be triggered with 'CTRL+SPACE.' The screenshot shows content assist being invoked on the '\$[UVM_HOME]' directory (refer Fig. 4).

Specify project properties

After setting up the argument file, we now must configure the UBus project to point to the argument file. Select the UBus project as shown, then select 'Properties' from the context menu. Select the 'SystemVerilog Project Properties' category. Now, select the 'Add' button to add a new argument file. Select the 'Add Project Path' button in the resulting dialogue box, then select 'ubus.f' in the file browser.

Rebuild the project and check the results

Finally, we need to rebuild the project index and confirm that the project paths are properly specified. The index can be rebuilt by selecting the UBus project, then selecting 'Rebuild SV

Specifications

- Version: 1.2.8
- File size: 13 MB (approximately)
- Last update: June 21, 2013
- Platform: Windows (All), Debian
- Licence: Freeware
- Developer: Matthew Ballance

Index' from the context menu. After the project index is rebuilt, source files managed by the index will be shown with a small blue dot in the project explorer. Note that the source files, and files included by the root files, are annotated with a blue dot. Note that files that are not included in the index, such as the Makefiles, are not annotated with a blue dot.

Recent changes in SVEditor

1. For nearly every SystemVerilog language feature, moving from scanner-based source analysis to a recursive-descent parser has been achieved. A few language features, inclusive of assertions, are still analysed via a scanner. But these are now in the minority, and will eventually be handled via the full parser.

2. The persistence strategy has been modified to depend on a translation-unit-based cache backed by filesystem storage. This increases the granularity of the cache, and doesn't