

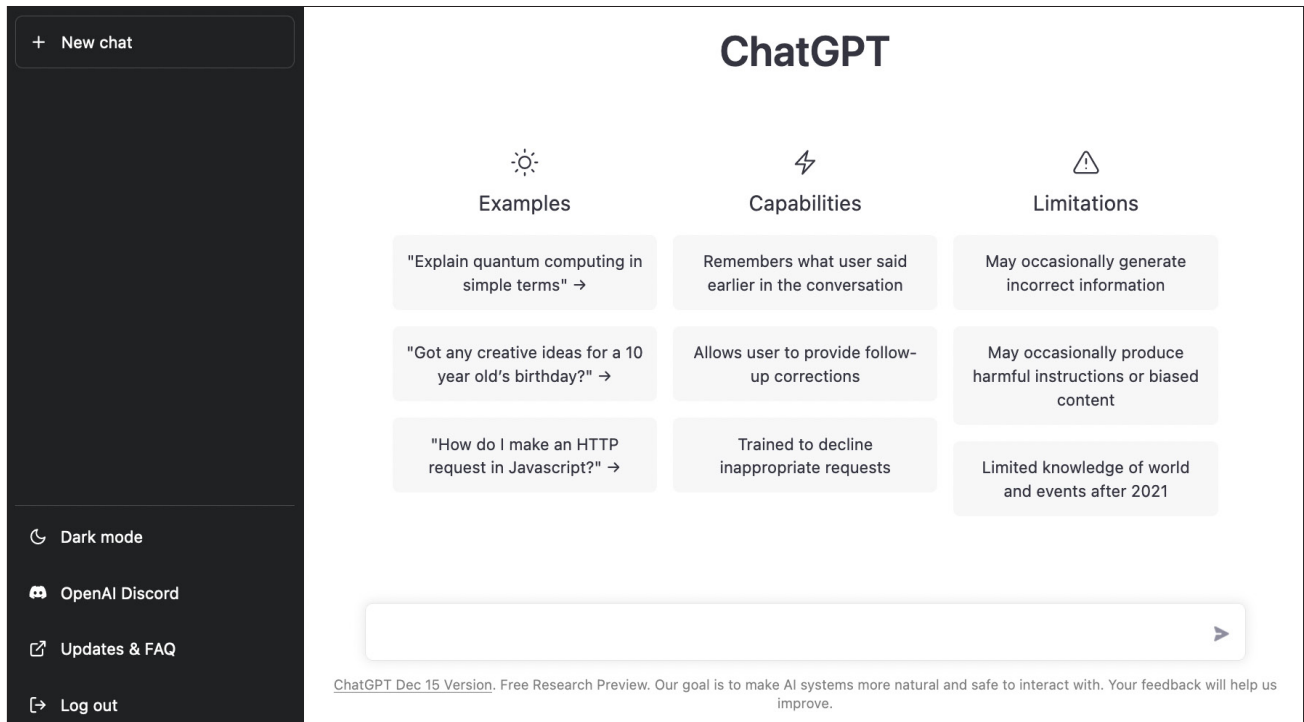


Fig. 2: ChatGPT conversations

```
<dependency>
  <groupId>org.slf4j</groupId>
  <artifactId>slf4j-api</artifactId>
  <version>1.7.30</version>
</dependency>
<dependency>
  <groupId>org.slf4j</groupId>
  <artifactId>slf4j-log4j12</artifactId>
  <version>1.7.30</version>
</dependency>
<dependency>
  <groupId>log4j</groupId>
  <artifactId>log4j</artifactId>
  <version>1.2.17</version>
</dependency>
</dependencies>
</project>
```

You will also need to include a `log4j.properties` file in your project to configure log4j to output log statements to the desired destination (e.g., console, file).

The story doesn't end here. I asked the assistant to help me with the `log4j.properties` file:

log4j.properties for spring with slf4j

It obliged.

```
# Root logger
log4j.rootLogger=INFO, stdout, file

# Console appender
```

```
log4j.appender.stdout=org.apache.log4j.ConsoleAppender
log4j.appender.stdout.layout=org.apache.log4j.PatternLayout
log4j.appender.stdout.layout.ConversionPattern=%d{yyyy-MM-dd HH:mm:ss} %-5p %c{1}:%L - %m%n

# File appender
log4j.appender.file=org.apache.log4j.FileAppender
log4j.appender.file.File=app.log
log4j.appender.file.layout=org.apache.log4j.PatternLayout
log4j.appender.file.layout.ConversionPattern=%d{yyyy-MM-dd HH:mm:ss} %-5p %c{1}:%L - %m%n
```

I was thrilled. Not that we cannot get this help from the web using a search engine. But the conversational experience with ChatGPT was just awesome.

Let us try ChatGPT for one last time by taking help in developing and deploying REST API. I started a new conversation with a simple question:

design rest api to add a customer

It responded with the following explanation:

To design a REST API to add a customer, you will need to define the endpoints and the request/response payloads for the API.

Here is an example of how you could design the API:

Endpoint:

POST /customers

Request payload:

```
{
  "name": "John Smith",
```