Instructor Notes:

Add instructor notes here.



Instructor Notes:

Explain the lesson coverage

Lesson Objectives

Configuring the Server with Eclipse Luna (4.4.x) Understanding the Directory Structure Deploying the Web Application on Wildfly



Lesson Objectives:

This lesson introduces Web application concepts. The lesson contents are:

Lesson 02: Working with WildFly 8.x

- 2.1: Configuring the Server with Eclipse Luna (4.4.x)
- 2.2: Understanding the Directory Structure
- 2.3: Deploying the Web Application on Wildfly

Instructor Notes:

Mention software requirements for installing WildFly

2.1: Configuring the Server with Eclipse Luna (4.4.x) Steps for installing WildFly



Steps for installing WildFly

- Require JDK 7 or Higher
- Set the JAVA_HOME environment variable to the location of JDK 7 or higher or this could be done by setting the path variable.

Identify the drive/location on the system for installing WildFly

Before installing WildFly ensure that the system satisfies certain pre-requisites. Check the availability of JDK 8. Check the version of JDK by using the command

java -version

Set the JAVA_HOME variable to the location of JDK 8 or setting path variable Identify the drive/location on the system for installing WildFly

(Note: It does not matter where WildFly is installed on the system. However do not install WildFly in a directory that contains spaces, it can cause problems sometimes)

Instructor Notes:

Official site from where WildFly can be downloaded

2.1: Configuring the Server with Eclipse Luna (4.4.x) WildFly installable



Download WildFly

- Latest version can be downloaded from http://wildfly.org/downloads
- The zip version can be downloaded from here

Basic installation: Extracting the contents of the archive to an appropriate location identified


Follow below steps for Wildfly Eclipse Plugin:

- Select "Help->Eclipse Marketplace..." from the Eclipse menu bar. Choose "Eclipse Marketplace" if prompted for a marketplace catalog.
- Search for "JBoss Tools" and install JBoss Tools (Luna), version 4.2.x.
- Wait until "Calculating requirements..." has finished and make sure that all features are checked, then confirm.
- Accept the license agreements and click "Finish".

WildFly Server is freely downloadable. An evaluation copy could also be used WildFly archive(Zip, tar) can be downloaded from http://wildfly.org/downloads Once the required version is downloaded basic installation can be done. Extract the contents of the archive in the appropriate location identified on the system.

Instructor Notes:

Apart from showing the diagrammatic representation of WildFly directory structure. Also tell the participants to see the structure on their machines and briefly look at even the files contained in the directory

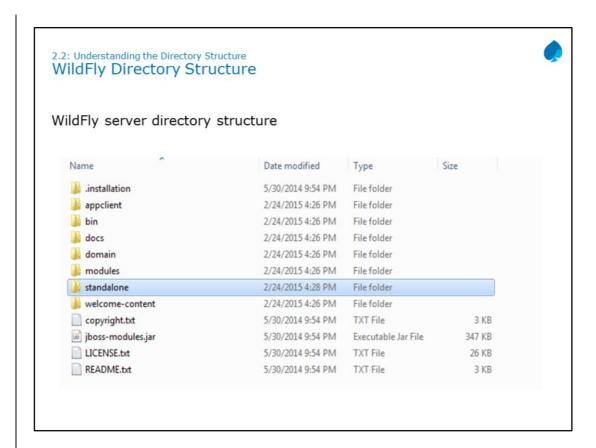

Once WildFly is available on the system, it will create the directory that contains server configurations, JARs and other directories which help in functioning of WildFly.

The figure on the slide shows the WildFly directory structure with below diagram

DIRECTORY	DESCRIPTION
appclient	Configuration files, deployment content
bin	Startup scripts, startup configuration files and
	various command line utilities like Vault, add-user
docs/schema	XML schema definition files
docs/examples/configs	Example configuration files representing specific
	use cases
domain	Configuration files, deployment content, and
	writable areas used by the domain mode processes
	run from this installation.
modules	WildFly 8 is based on modular class loading
	architecture. The various modules used in the
	server are stored here.
Standalone	Configuration files, deployment content, and
	writable areas used by the single standalone server
	run from this installation
welcome-content	Default Welcome Page content

Instructor Notes:

As WildFly is not used in the clustered environment, focus on the standalone directory structure where single instance of WildFly server is started.

2.2: Understanding the Directory Structure WildFly Directory Structure



Standalone Directory Structure

In "standalone" mode each WildFly 8 server instance is an independent process. The configuration files, deployment content and writable areas used by the single standalone server run from a WildFly installation.

The details of the standalone directory is present in below diagram

DIRECTORY	DESCRIPTION
configuration	Configuration files for the standalone server that
	runs off of this installation. All configuration
	information for the running server is located here
	and is the single place for configuration
	modifications for the standalone server.
data	Persistent information written by the server to
	survive a restart of the server
deployments	End user deployment content can be placed in this
	directory for automatic detection and deployment of
	that content into the server's runtime.
lib/ext	Location for installed library jars referenced by
	applications using the Extension-List mechanism
log	standalone server log files
tmp	location for temporary files written by the server
tmp/auth	Special location used to exchange authentication
	tokens with local clients so they can confirm that
	they are local to the running AS (Application
	Server)process

Instructor Notes:

2.2: Understanding the Directory Structure WildFly Configurations



Standalone Server Configurations

- standalone.xml (default)
- · Java Enterprise Edition 7 web profile certified configuration with the required technologies
- standalone-ha.xml
 - · Java Enterprise Edition 7 web profile certified configuration with high availability
- standalone-full.xml
- Java Enterprise Edition 7 full profile certified configuration including all the required EE 7 technologies
- standalone-full-ha.xml
 - Java Enterprise Edition 7 full profile certified configuration with high availability

We also have the Domain Server Configurations


domain.xml

Java Enterprise Edition 7 full and web profiles available with or without high availability

Important to note is that the domain and standalone modes determine how the servers are managed not what capabilities they provide.

Instructor Notes:


Configuring WildFly with Eclipse editor

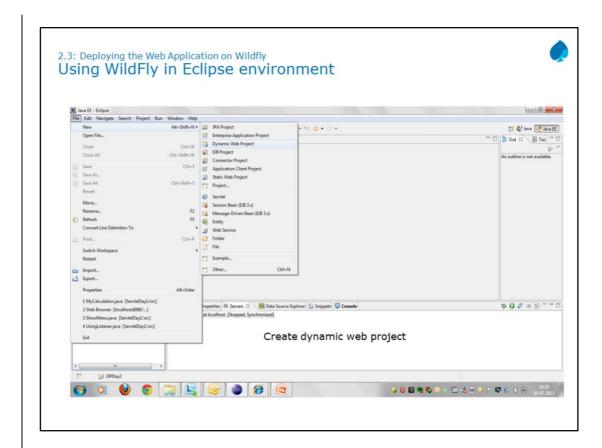

Select Dynamic Web Project

Instructor Notes:


Configuring WildFly with Eclipse editor

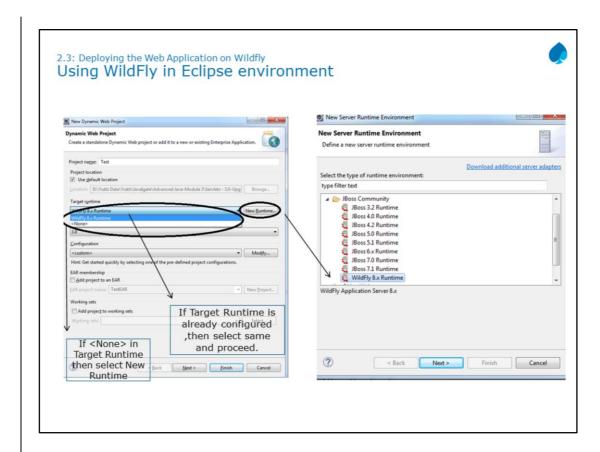

Click New Runtime to add server

Instructor Notes:


Configuring WildFly with Eclipse editor

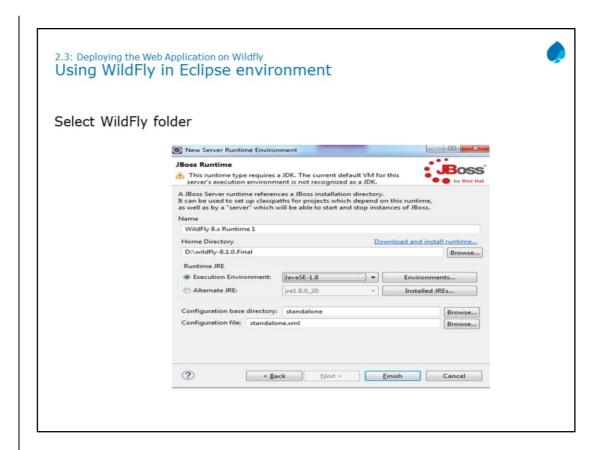

Select WildFly folder

Instructor Notes:


Configuring WildFly with Eclipse editor

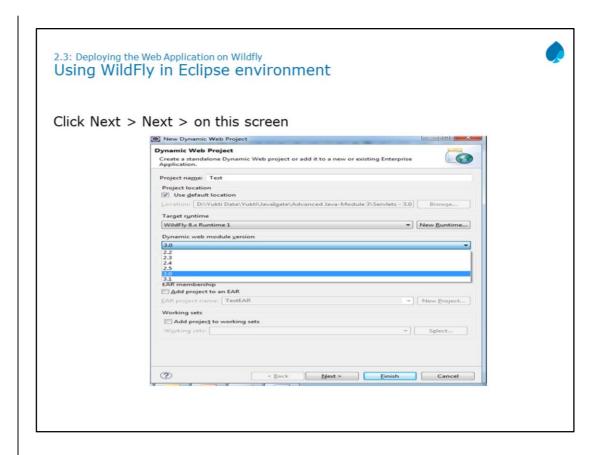

Select Dynamic web module version 3.0


Instructor Notes:

Configuring WildFly with Eclipse editor

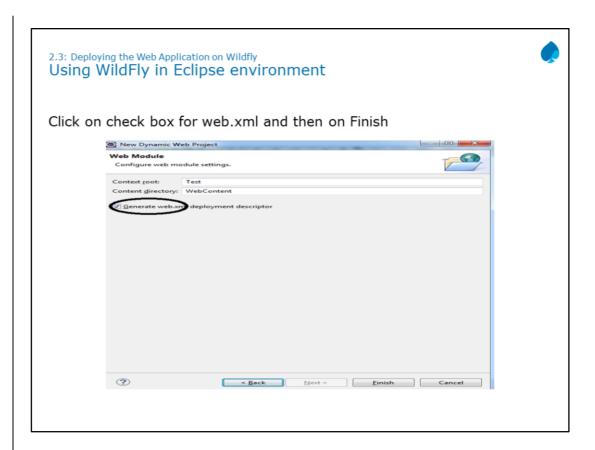

Instructor Notes:


Configuring WildFly with Eclipse editor

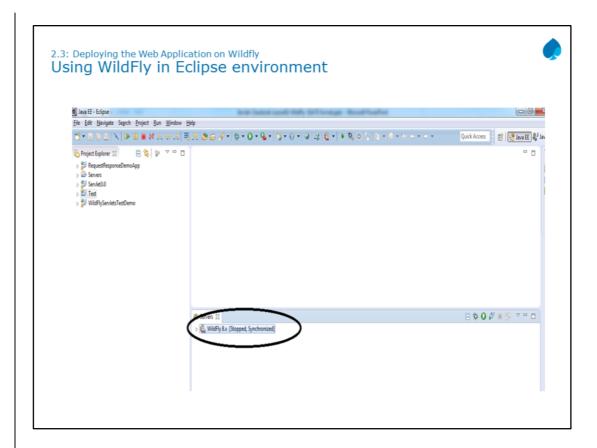

Double click highlighted link to start server

Instructor Notes:

Configuring WildFly with Eclipse editor

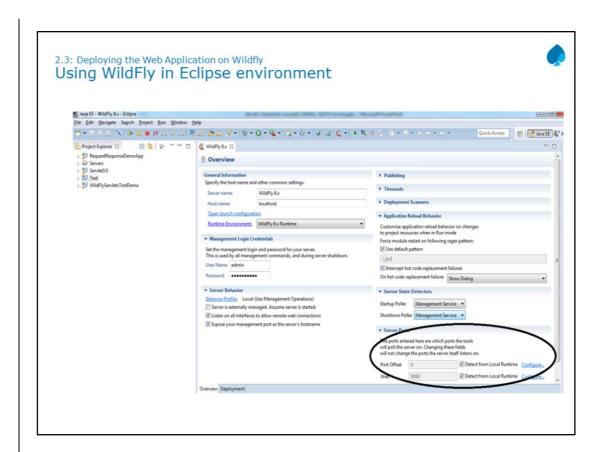

Default port number of WildFly is 8080. In the above configuration localhost port number has been set to 9090. (could be also set from standalone.xml file (D:\wildfly-8.1.0.Final\standalone\configuration)).

See below diagram

Instructor Notes:


Apart from showing the diagrammatic representation. Also tell the participants to see the JMX Console on their machines and briefly look at even the files contained in the directory. This is the first page on starting WildFly server.

The default port number is 8080. But port number is changed here to 9090 due to conflict with other services



Instructor Notes:

Summarize the points discussed

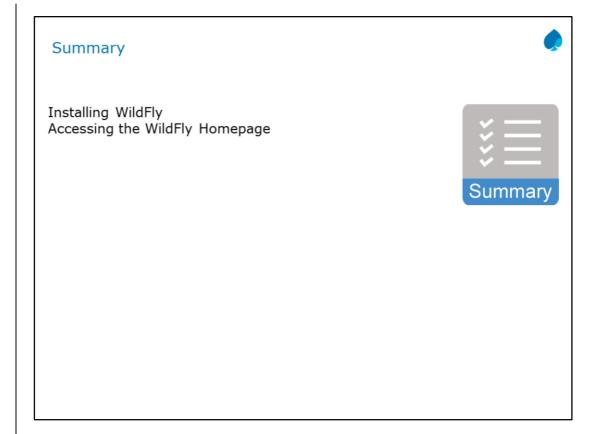

Add the notes here.

Instructor Notes:


Answers 1: Standalone

Answer 2: configuration

Review Questions

Question 1: If an independent instance of WildFly required then which mode should be selected

- Option 1: BasicOption 2: DomainOption 3: Standalone
- Option 4: None of the above



Option 1: data

Option 2: configuration

Option 3: logOption 4: conf



Add the notes here.