


2160707  
Advanced Java

# Unit-2 JDBC Programming



**Asst. Prof. Prashant Sahatiya**

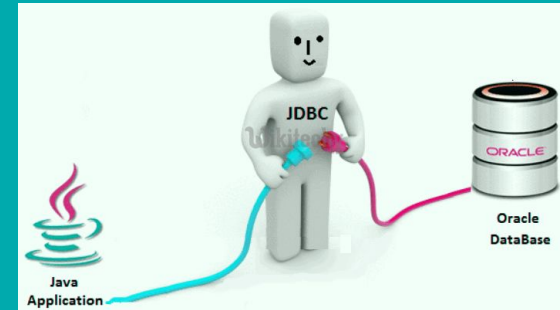


# Subject Overview

Sr. No.	Unit	% Weightage
1	Java Networking	5
2	JDBC Programming	10
3	Servlet API and Overview	25
4	Java Server Pages	25
5	Java Server Faces	10
6	Hibernate	15
7	Java Web Frameworks: Spring MVC	10

## Reference Book:

Complete Reference J2EE by James Keogh mcgraw publication

Chapter : 6 and 7

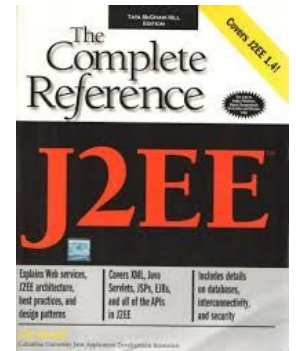

# Unit-2: JDBC Programming

---

1. Introduction
2. JDBC API
3. The JDBC Connectivity Model
4. JDBC Architecture
5. JDBC Driver
6. JDBC Components
7. JDBC Package
8. JDBC Process
9. JDBC Program
10. Types of Statement
11. ResultSet Interface
12. ResultSetMetaData Interface
13. Executing SQL updates
14. Transaction Management
15. Batch Processing in JDBC

# Introduction

---


- Database
  - Collection of data
- DBMS
  - Database Management System
  - Storing and organizing data
- SQL
  - Relational database
  - Structured Query Language
- JDBC
  - Java Database Connectivity
  - JDBC driver

# Introduction: JDBC

**JDBC (Java Database Connectivity)** is used to connect java application with database.

It provides **classes** and **interfaces** to connect or communicate Java application with database.

JDBC is an API used to communicate **Java application** to **database** in database independent and platform independent manner.

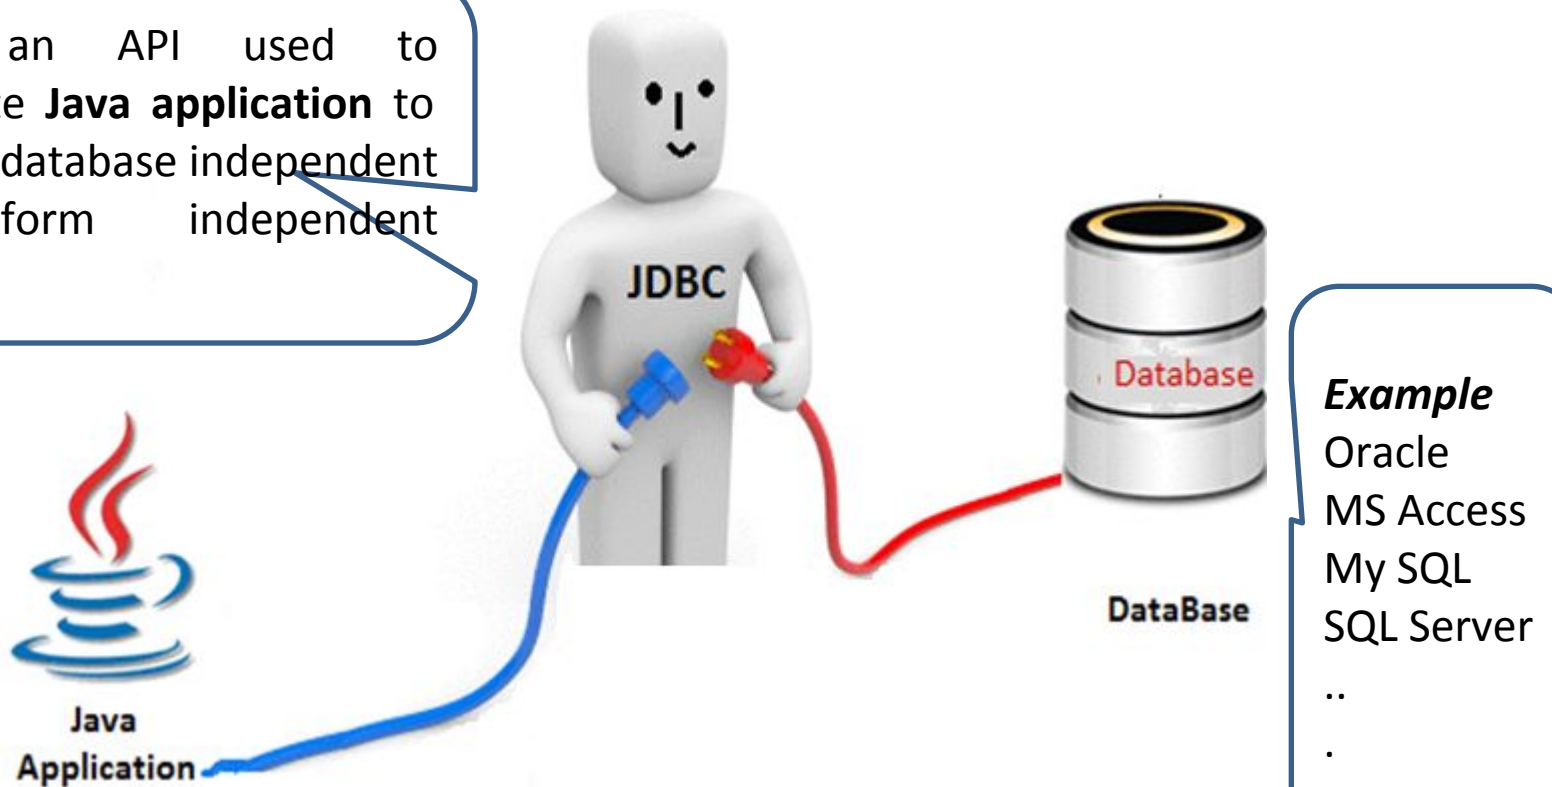

# Introduction: JDBC

---

- JDBC (Java Database Connection) is the standard method of accessing **databases** from **Java application**.
- JDBC is a specification from **Sun Microsystems** that provides a **standard API** for java application to communicate with different database.
- JDBC is a **platform independent** interface between relational database and java applications.

# What is an API?

---


- *Application Program Interface*
- A set of routines, protocols, and tools for building software applications.
- JDBC is an API, which is used in java programming for interacting with database.

# Introduction: JDBC API

- JDBC API allows java programs to

- i. Make a connection with database


- ii. Creating SQL statements

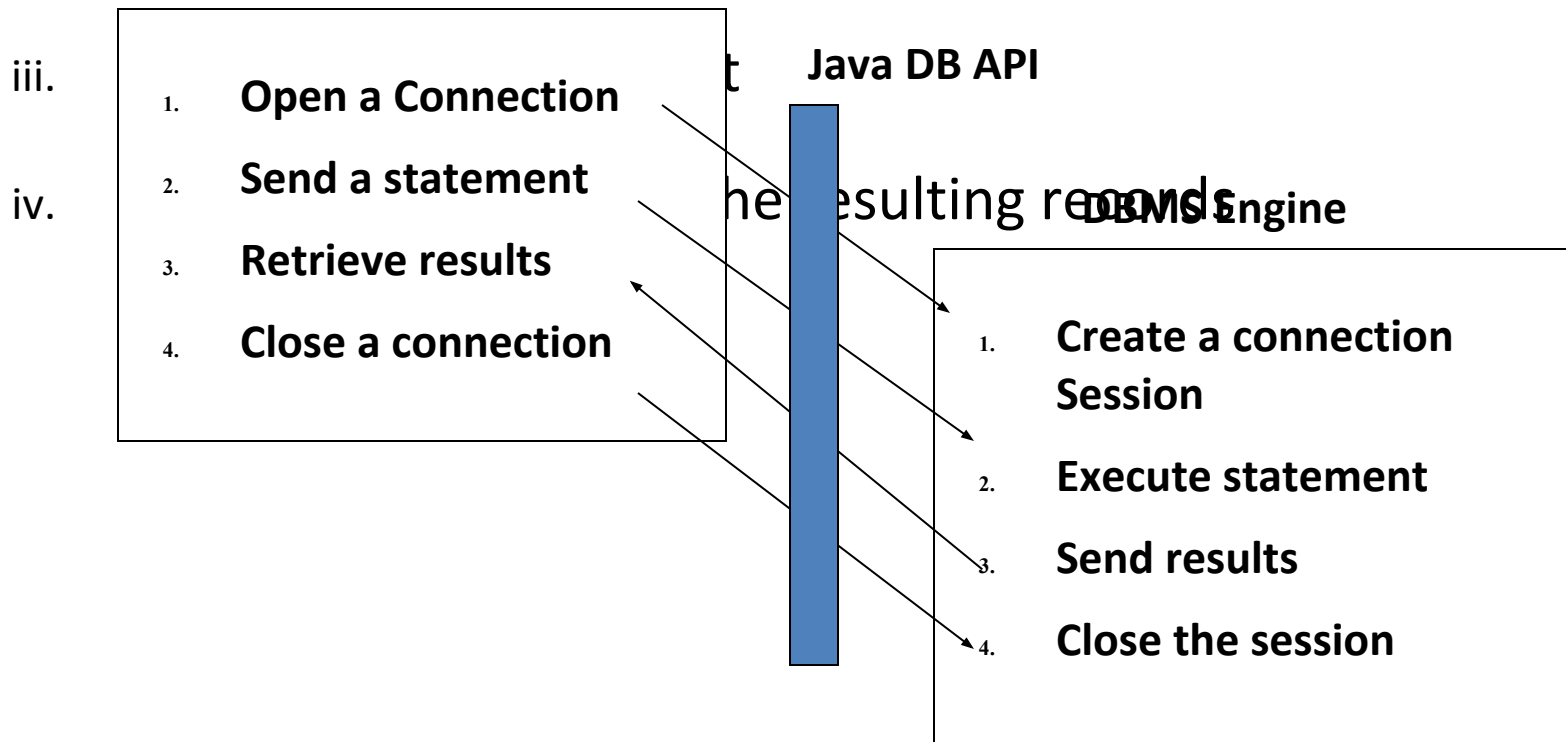



# The JDBC Connectivity Model

---

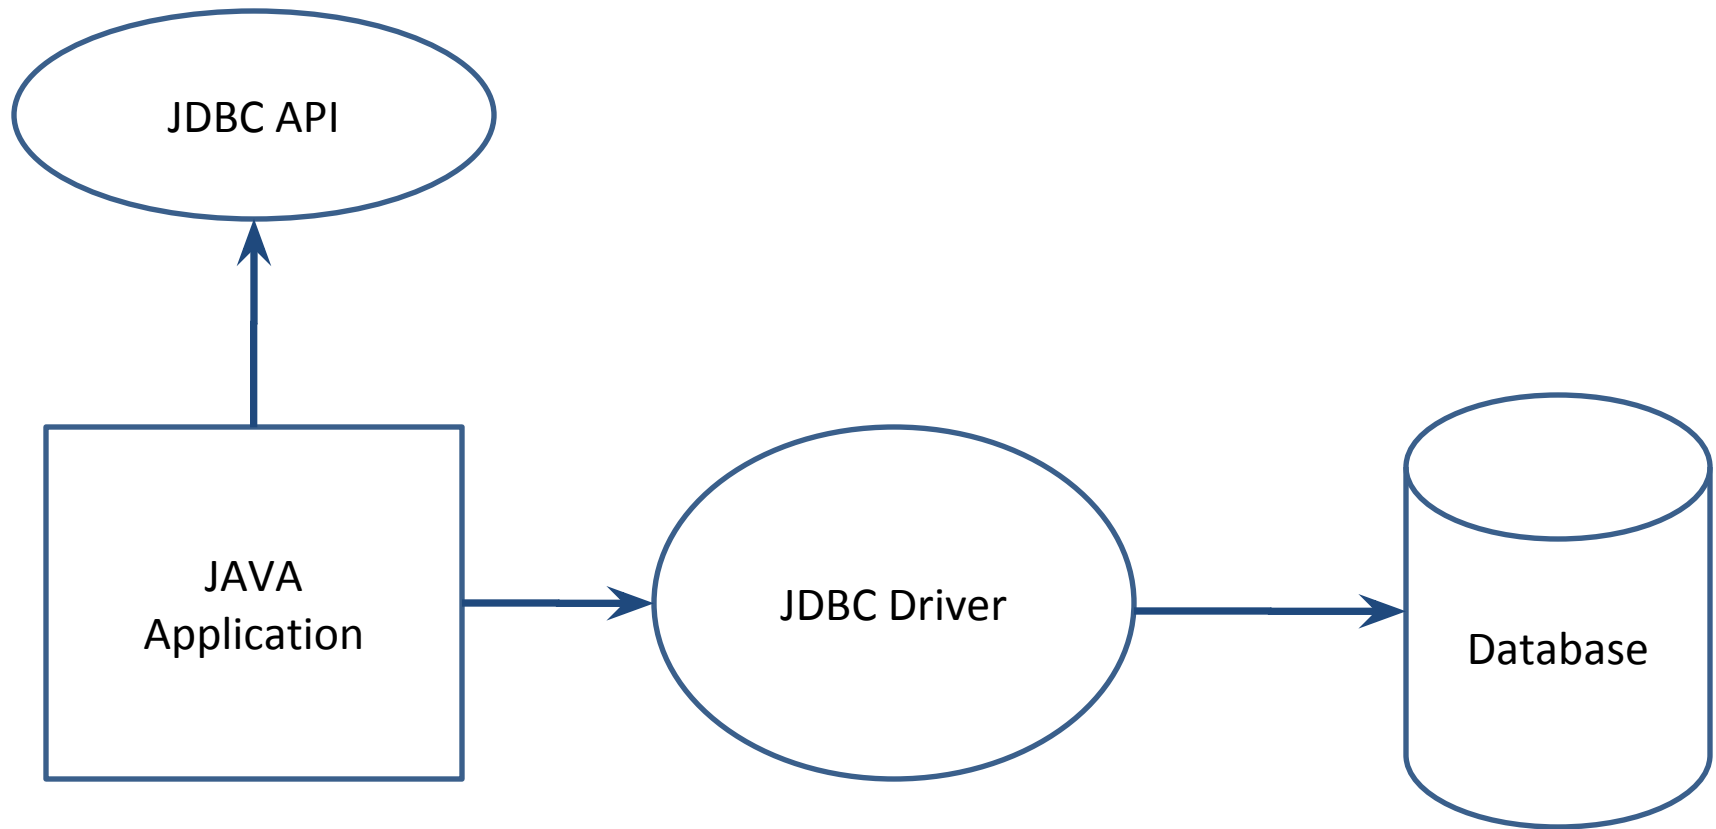

# JDBC Architecture

It provides **classes** & **interfaces** to connect or communicate Java application with database.

**Java Application**

A **Java** program that runs stand alone in a client or server.

This interface handles the communications with the database

**JDBC API**

This class manages a list of database drivers. It ensures that the correct driver is used to access each data source.

**JDBC Driver Manager**

Database is a collection of organized information

**JDBC Driver**

**JDBC Driver**

**JDBC Driver**

**Oracle**

**SQL Server**

**ODBC Data Source**

# JDBC Driver

---

- **API:** Set of interfaces independent of the RDBMS
- **Driver:** RDBMS-specific implementation of API interfaces  
e.g. Oracle, DB2, MySQL, etc.

*Just like Java aims for “Write once, Run anywhere”,  
JDBC strives for “Write once, Run with any database”.*


# JDBC Driver: Type1 (JDBC-ODBC Driver)

---

- Depends on support for ODBC
- Not portable
- Translate JDBC calls into ODBC calls and use Windows ODBC built in drivers
- ODBC must be set up on every client
  - for server side servlets ODBC must be set up on web server
- driver `sun.jdbc.odbc.JdbcOdbc` provided by JavaSoft with JDK
- No support from JDK 1.8 (Java 8)

E.g. MS Access

# JDBC Driver: Type 1 (JDBC-ODBC Driver)

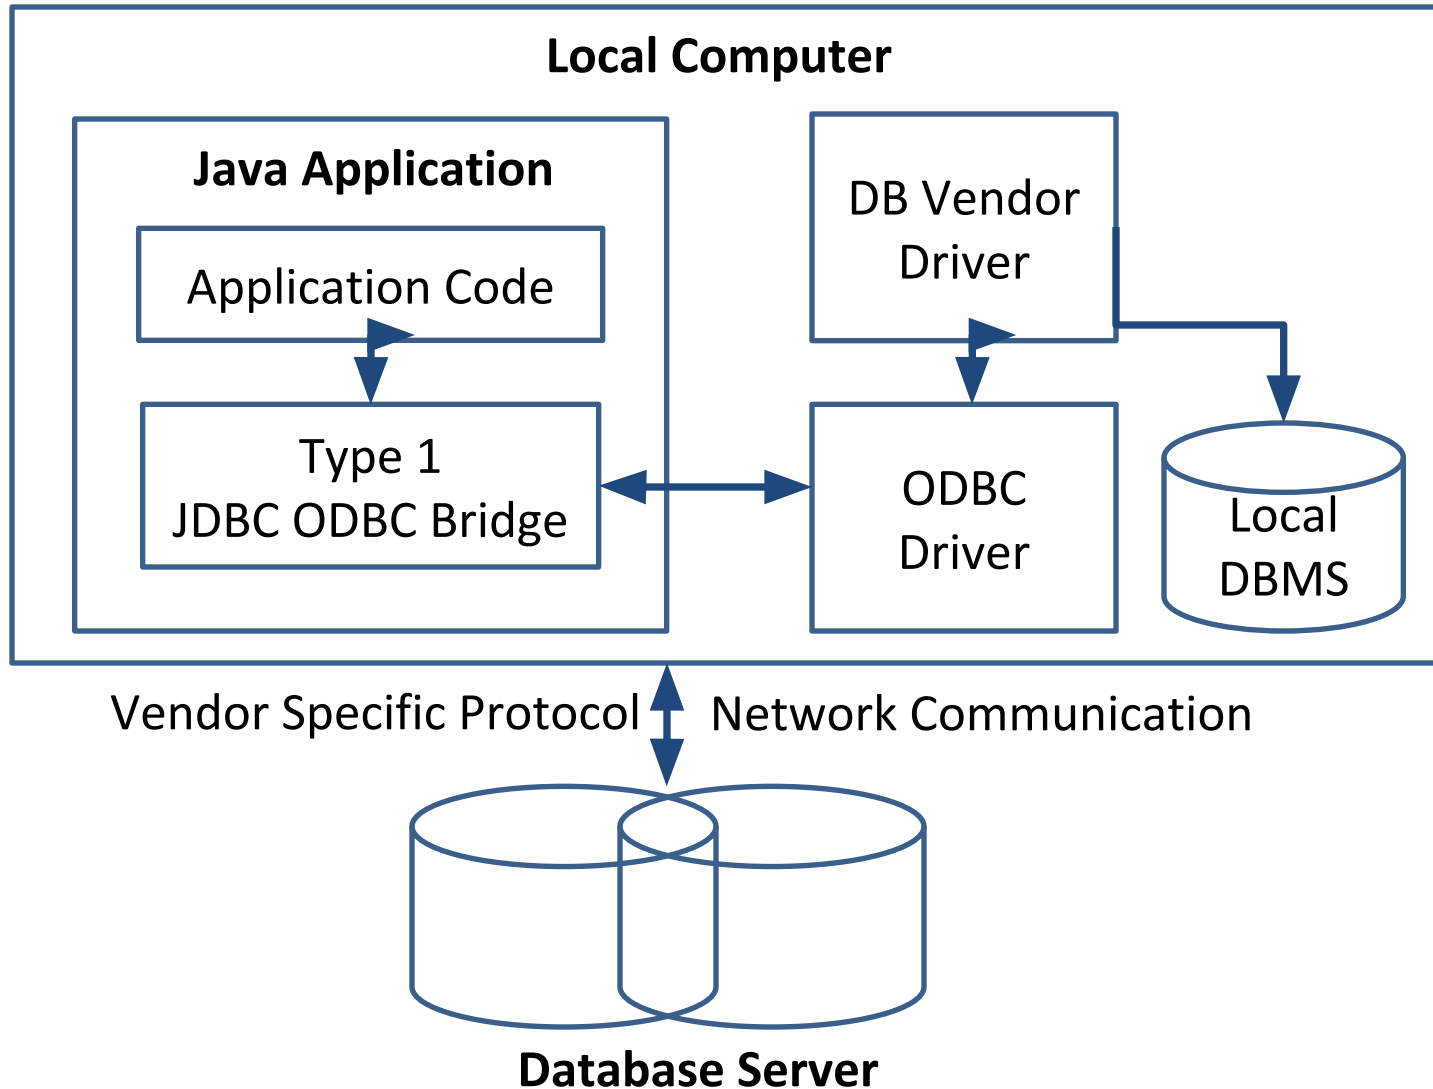

# JDBC Driver: Type 1 (JDBC-ODBC Driver)

---

## Advantages :

- Allow to communicate with all database supported by ODBC driver
- It is vendor independent driver

## Disadvantages:

- Due to large number of translations, **execution speed** is decreased
- Dependent on the ODBC driver
- ODBC binary code or ODBC client **library to be installed** in every client machine
- Uses java native interface to make ODBC call


Because of listed disadvantage, type1 driver is not used in production environment. It can only be used, when database doesn't have any other JDBC driver implementation.

# JDBC Driver: Type 2 (Native Code Driver)

---

- JDBC API calls are converted into **native API calls**, which are unique to the database.
- These drivers are typically provided by the database vendors and used in the same manner as the JDBC-ODBC Bridge.
- Native code Driver are usually written in **C, C++**.
- The vendor-specific driver must be installed on each client machine.
- Type 2 Driver is suitable to use with server side applications.
- E.g. Oracle OCI driver, Weblogic OCI driver, Type2 for Sybase

# JDBC Driver: Type 2 (Native Code Driver)

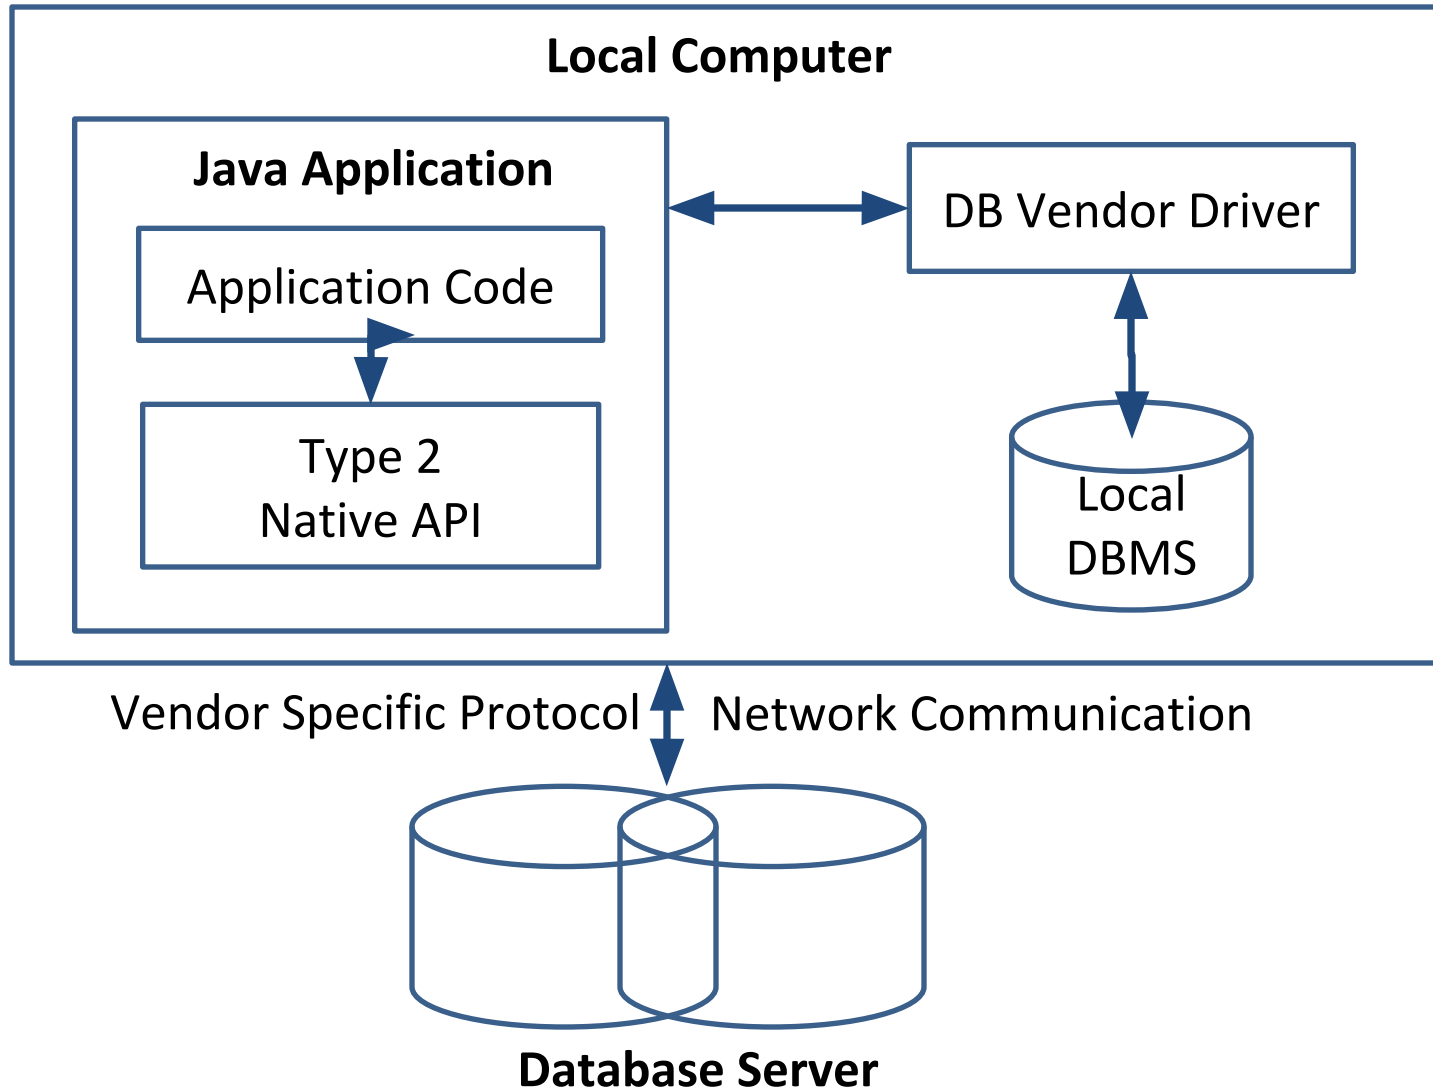



# JDBC Driver: Type 2 (Native Code Driver)

---

## Advantages

- As there is no implementation of JDBC-ODBC bridge, it may be considerably **faster than a Type 1 driver**.

## Disadvantages


- The vendor client library needs to be installed on the client machine.
- This driver is **platform dependent**.
- This driver supports all java applications except **applets**.
- It may **increase cost of application**, if it needs to run on different platform (since we may require buying the native libraries for all of the platform).

# JDBC Driver: Type 3 (Java Protocol)

---

- Pure Java Driver
- Depends on Middleware server
- Can interface to multiple databases – Not vendor specific.
- Follows a **three-tier** communication approach.
- The JDBC clients use standard network sockets to communicate with a middleware application server.
- The socket information is then translated by the middleware application server into the call format required by the DBMS.
- This kind of driver is extremely flexible, since it requires no code installed on the **client** and a single driver can actually provide access to **multiple databases**.

# JDBC Driver: Type 3 (Java Protocol)

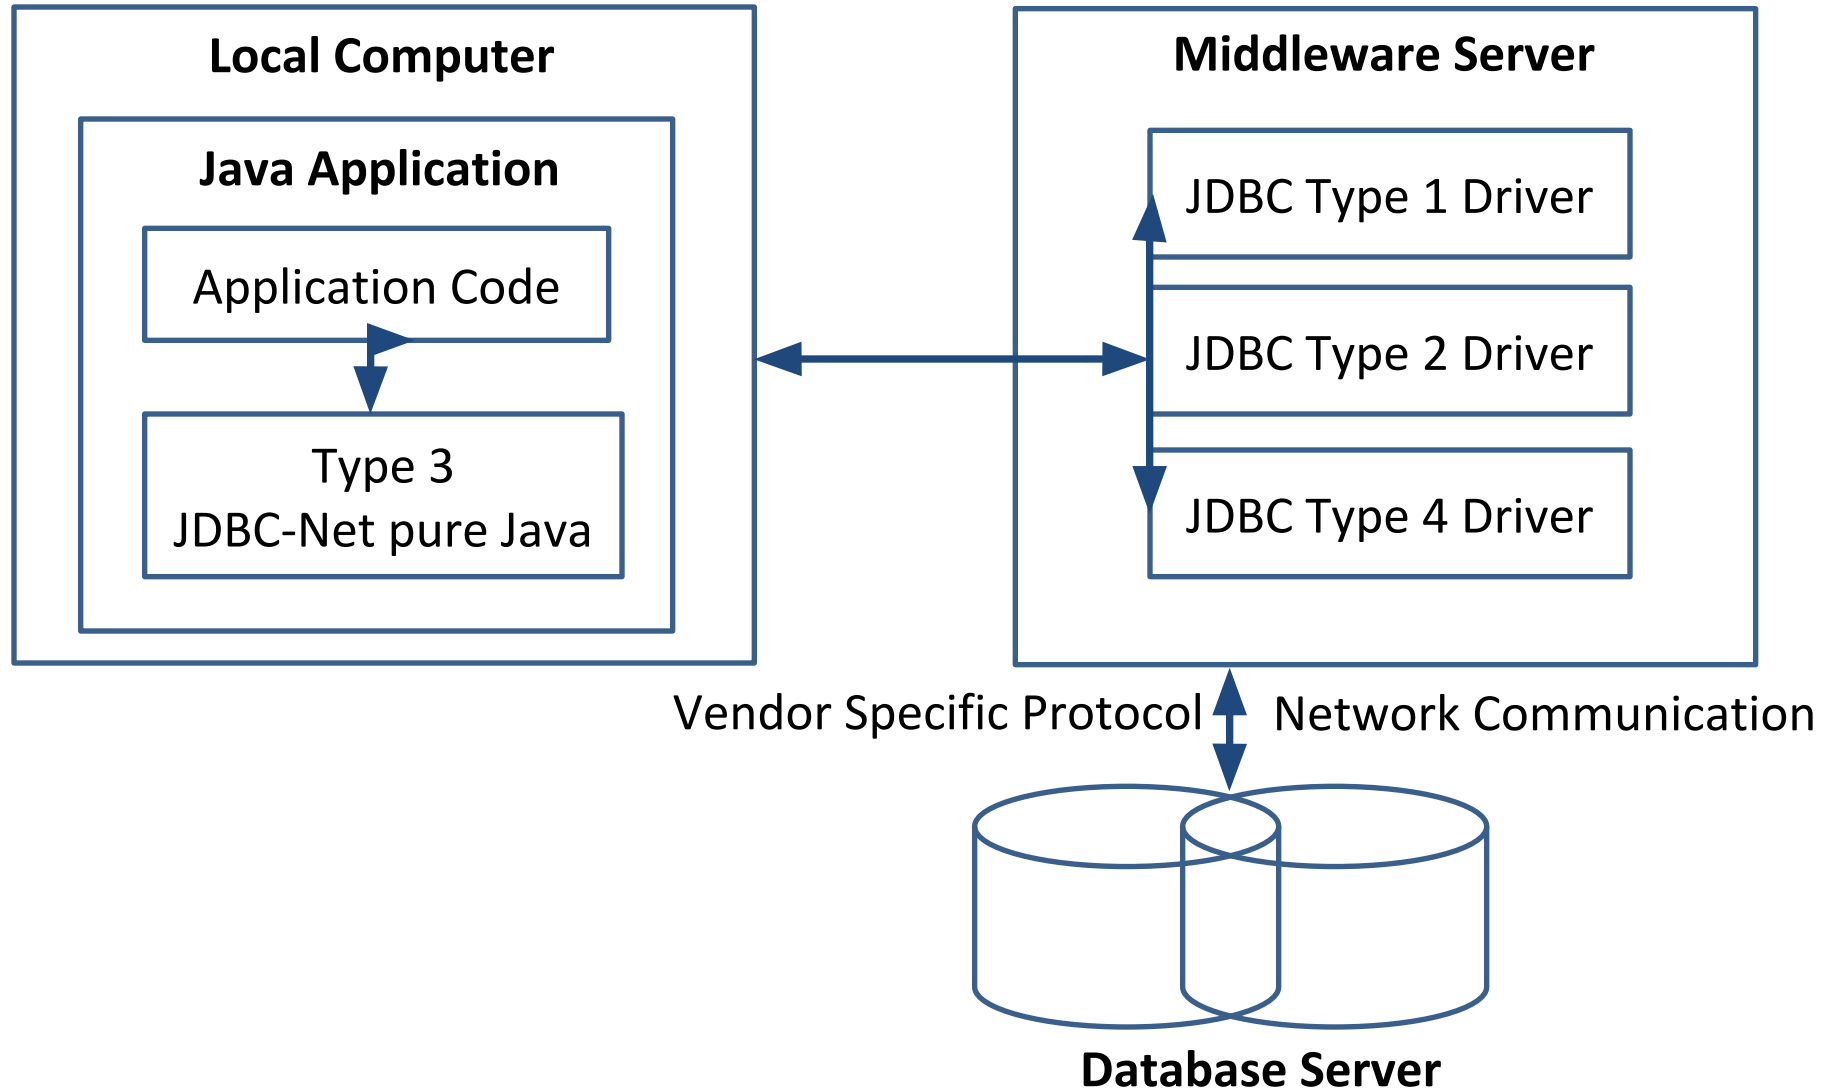

# JDBC Driver: Type 3 (Java Protocol)

---

## Advantages

- Since the communication between client and the middleware server is **database independent**, there is no need for the database **vendor library** on the client.
- A single driver can handle any database, provided the middleware supports it.
- We can switch from one database to other without changing the **client-side** driver class, by just changing configurations of middleware server.
- E.g.: IDS Driver, Weblogic RMI Driver

# JDBC Driver: Type 3 (Java Protocol)

---

## Disadvantages


- Compared to Type 2 drivers, Type 3 drivers are slow due to increased number of network calls.
- Requires database-specific coding to be done in the middle tier.
- The middleware layer added may result in additional latency, but is typically overcome by using better middleware services.

# JDBC Driver: Type 4 (Database Protocol)

---

- It is known as the Direct to Database Pure Java Driver
- Need to download a new driver for each database engine  
e.g. Oracle, MySQL
- Type 4 driver, a pure Java-based driver communicates directly with the vendor's database through socket connection.
- This kind of driver is extremely flexible, you don't need to install special software on the client or server.
- Such drivers are implemented by DBMS vendors.

# JDBC Driver: Type 4 (Database Protocol)

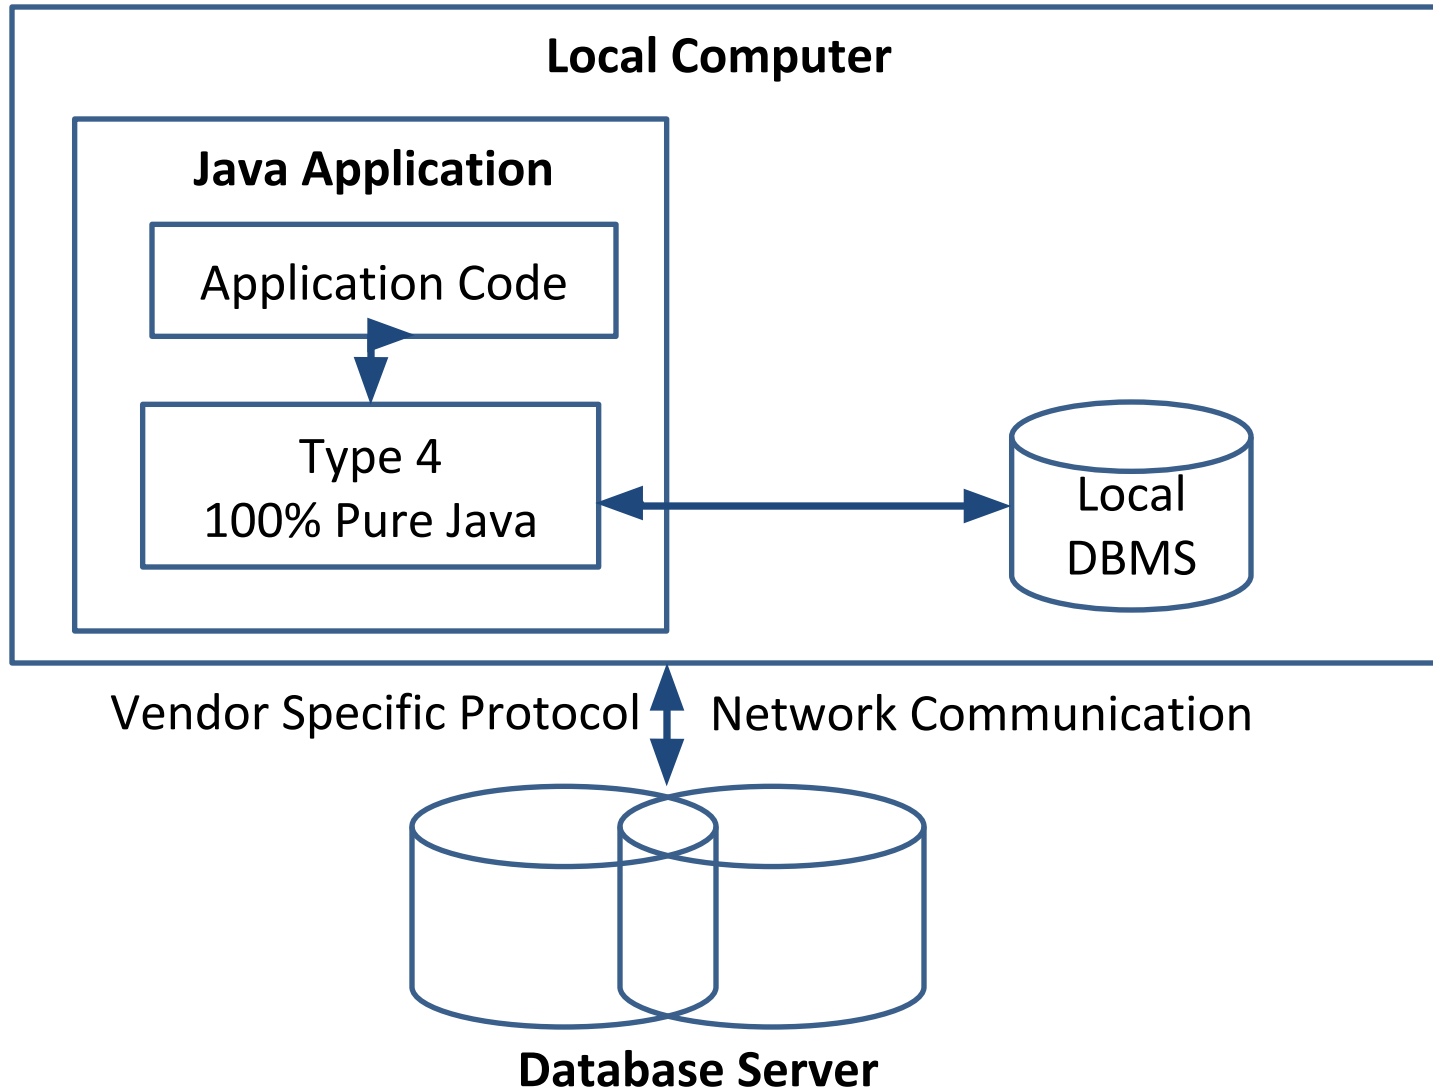

# JDBC Driver: Type 4 (Database Protocol)

---

## **Advantages**

- Completely implemented in Java to achieve platform independence.
- No native libraries are required to be installed in client machine.
- These drivers don't translate the requests into an intermediary format (such as ODBC).
- Secure to use since, it uses database server specific protocol.
- The client application connects directly to the database server.
- No translation or middleware layers are used, improving performance.
- The JVM manages all the aspects of the application-to-database connection.

## **Disadvantage**

- This Driver uses database specific protocol and it is DBMS vendor dependent.



# JDBC Driver

---

Thin Driver	You can connect to a database without the client installed on your machine. E.g. Type 4.
Thick Driver	Thick client would need the client installation. E.g. Type 1 and Type 2.

# Comparison between JDBC Drivers

Type:	Type 1	Type 2	Type 3	Type 4
Name:	JDBC-ODBC Bridge	Native Code Driver/ JNI	Java Protocol/ Middleware	Database Protocol
Vendor Specific:	No	Yes	No	Yes
Portable	No	No	Yes	Yes
Pure Java Driver	No	No	Yes	Yes
Working	JDBC-> ODBC call ODBC -> native call	JDBC call -> native specific call	JDBC call -> middleware specific. Middleware -> native call	JDBC call ->DB specific call
Multiple DB	Yes [only ODBC supported DB]	No	Yes [DB Driver should be in middleware]	No

# Comparison between JDBC Drivers

Type:	Type 1	Type 2	Type 3	Type 4
Name:	JDBC-ODBC Bridge	Native Code Driver/ JNI	Java Protocol/ Middleware	Database Protocol
Example	MS Access	Oracle OCI driver	IDA Server	MySQL
Execution Speed	Slowest among all	Faster Compared to Type1	Slower Compared to Type2	Fastest among all
Driver	Thick Driver	Thick Driver	Thin Driver	Thin Driver

# Which Driver should be Used?

---

- If you are accessing one type of database such as MySQL, Oracle, Sybase or IBM etc., the preferred driver type is 4.
- If your Java application is accessing multiple types of databases at the same time, type 3 is the preferred driver.
- Type 2 drivers are useful in situations, where a type 3 or type 4 driver is not available yet for your database.
- The type 1 driver is not considered a deployment-level driver, and is typically used for development and testing purposes only.

# JDBC with different RDBMS

RDBMS	JDBC driver name	URL format
MySQL	com.mysql.jdbc.Driver	jdbc:mysql://hostname/ databaseName
ORACLE	oracle.jdbc.driver.OracleDriver	jdbc:oracle:thin:@hostname:port Number:databaseName
DB2	com.ibm.db2.jdbc.net.DB2Driver	jdbc:db2:hostname:port Number /databaseName
Sybase	com.sybase.jdbc.SybDriver	jdbc:sybase:Tds:<host>:<port>
SQLite	org.sqlite.JDBC	jdbc:sqlite:C:/sqlite/db/databaseName
SQLServer	com.microsoft.sqlserver.jdbc.SQLServerDriver	jdbc:microsoft:sqlserver://hostname:1433;DatabaseName

# JDBC Driver: Reference Link

---


- Type 1: <https://www.youtube.com/watch?v=np3TQe9mE0o>
- Type 2:  
<https://www.youtube.com/watch?v=9L7BRUTxbu8&list=PLmCsXDGbJHdjvpGcahcNIV9-moRmJqWDs&index=3>
- Type 3:  
<https://www.youtube.com/watch?v=yd4nFHkCe2Q&list=PLmCsXDGbJHdjvpGcahcNIV9-moRmJqWDs&index=4>
- Type 4:  
<https://www.youtube.com/watch?v=glu5cx15fmk&list=PLmCsXDGbJHdjvpGcahcNIV9-moRmJqWDs&index=5>

# GTU Question : JDBC

1	What is JDBC? List out all various types of JDBC Driver. Explain Thick and Thin driver. Write code snippet for each type of JDBC connection. Comment on selection of driver. [7 Marks]	Sum'16
2	What is JDBC? Explain the types of JDBC drivers? Write a code snippet for each type of JDBC connection. [7 Marks]	Win'16
3	Explain JDBC driver types in detail.[7 Marks]	Sum'17
4	List the different types of JDBC drivers. Compare the various driver types for their advantages and disadvantages.	Sum'18
5	List different types of JDBC drivers and explain any two of them. [7 Marks]	Win'18
6	List types of driver used in JDBC. Explain Thin driver. [3 Marks]	Win'19

# JDBC Components

The JDBC API provides the following interfaces and classes

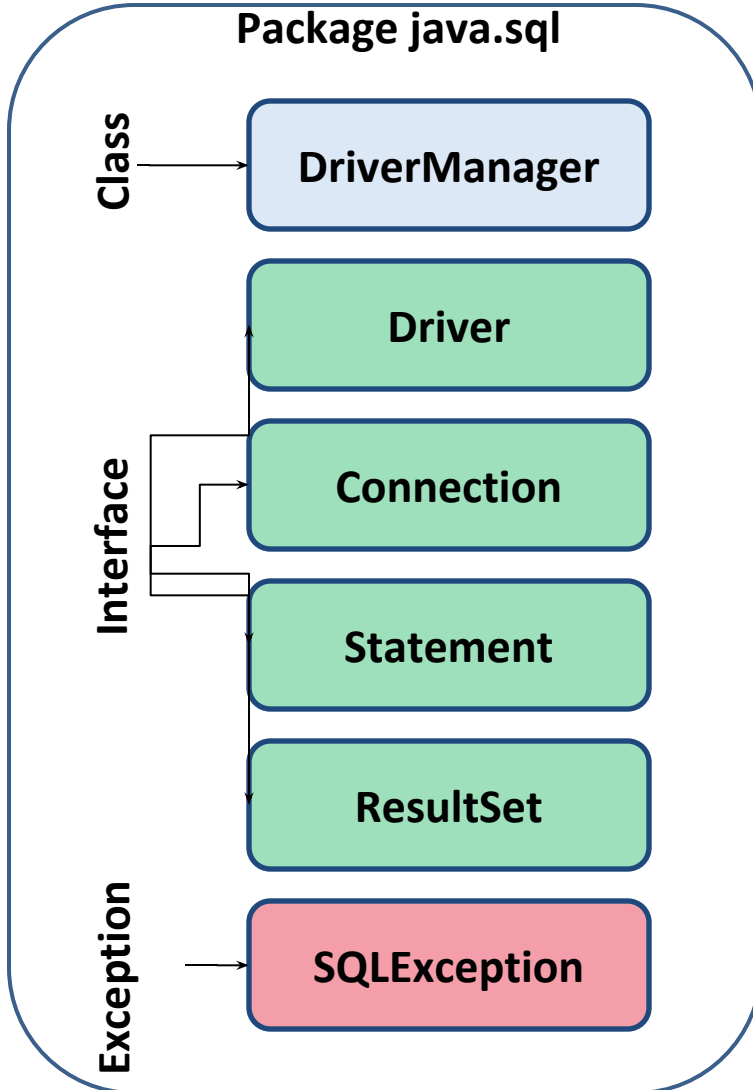

It acts as an interface between user and drivers. It keeps track of the drivers that are available and handles the communications with the database server. **Driver interface** provides vendor-specific implementations of the **Connection** interface. This interface is the session between java application and database. It contains all methods for contacting a database.

This interface is used to submit the SQL statements to the database.


These objects hold data retrieved from a database after you execute an SQL query using **Statement** objects. It acts as an iterator to allow you to move through its data.

This class handles any errors that occur in a database application.



# JDBC Package

---



java.sql

- Contains core java objects of JDBC API.
- It includes java data objects, that provides basics for connecting to DBMS and interacting with data stored in DBMS.
- This package performs JDBC core operations such as Creating and Executing query.

# JDBC Process

---

Step 1: Loading JDBC Driver

Step 2: Connection to DBMS

Step 3: Creating and executing statement

Step 4: Processing data returned by the DBMS

Step 5: Terminating Connection with DBMS


# Step 1: Loading JDBC Driver

- Create an instance of the driver
- Register driver in the driver manager
- Loading the driver or drivers

for example, you want to use driver for mysql, the following code will load it:

Returns the Class object associated with the class or interface with the given string name.

```
Class.forName("com.mysql.jdbc.Driver");
```

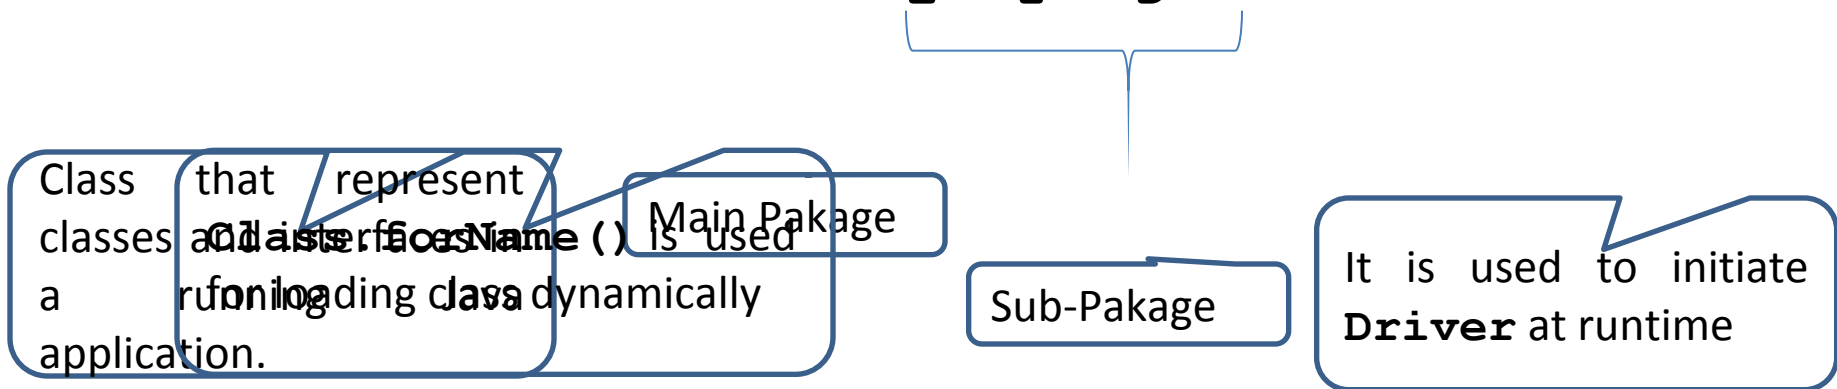

# Step 2: Connection to DBMS

- After you've loaded the driver, you can establish a connection using the **DriverManager** class (`java.sql.DriverManager`).

*Method: DriverManager*

<pre>public static Connection getConnection(String url) throws SQLException</pre>	Attempts to establish a connection to the given database URL. The DriverManager attempts to select an appropriate driver from the set of registered JDBC drivers.
<pre>public static Connection getConnection(String url,                String user,                String password                ) throws SQLException</pre>	Attempts to establish a connection to the given database URL. <b>url</b> - a database url of the form <code>jdbc:subprotocol:subname</code> <b>user</b> - the database user on whose behalf the connection is being made <b>password</b> - the user's password

# Step 2: Connection to DBMS

---

## *Syntax:*

Interface of java.sql package

```
Connection conn= DriverManager.getConnection(URL,USER_NM,PASS) ;
```

Class of java.sql package

## *Example:*

```
Connection conn = DriverManager.getConnection  
("jdbc:mysql://localhost:3306/gtu","root", "pwd") ;
```

Database Name

# Step 3: Creating statement

- Once a connection is obtained, we can interact with the database.
- The JDBC **Statement** interfaces define the methods and properties that enable you to send SQL or PL/SQL commands and receive data from your database.

```
Statement st=con.createStatement();
```

Interface is used for general-purpose access to your database, when using static SQL statements at runtime.

```
Statement createStatement()  
throws SQLException
```

Creates a Statement object for sending SQL statements to the database.

# Step 3:Executing Statement

- Once you've created a Statement object, you can then use it to execute an SQL statement with one of its three execute methods.

ResultSet <b>executeQuery</b> (String sql) throws SQLException	Returns a ResultSet object. Use this method when you expect to get a result set, as you would with a SELECT statement.
Boolean <b>execute</b> (String sql) throws SQLException	Returns a boolean value of true if a ResultSet object can be retrieved; otherwise, it returns false.
int <b>executeUpdate</b> (String sql) throws SQLException	Returns the number of rows affected by the execution of the SQL statement. for example, an INSERT, UPDATE, or DELETE statement.

# Step 3: Executing Statement

---

*Syntax:*

```
ResultSet rs=st.executeQuery("query") ;
```

It holds data retrieved from a database after you execute an SQL query using Statement objects. It acts as an iterator to allow you to move through its data.

Returns a ResultSet object. Use this method when you expect to get a result set, as you would with a SELECT statement.

*Example*

```
ResultSet rs = stmt.executeQuery  
  
("SELECT * from diet");
```




# Step 3: Executing Statement

```
ResultSet rs = stmt.executeQuery
```

```
("SELECT * from diet");
```

ResultSet rs

Enr_no	Name	Branch
601	abc	ce
602	pqr	me
603	rst	ec
604	def	Ci

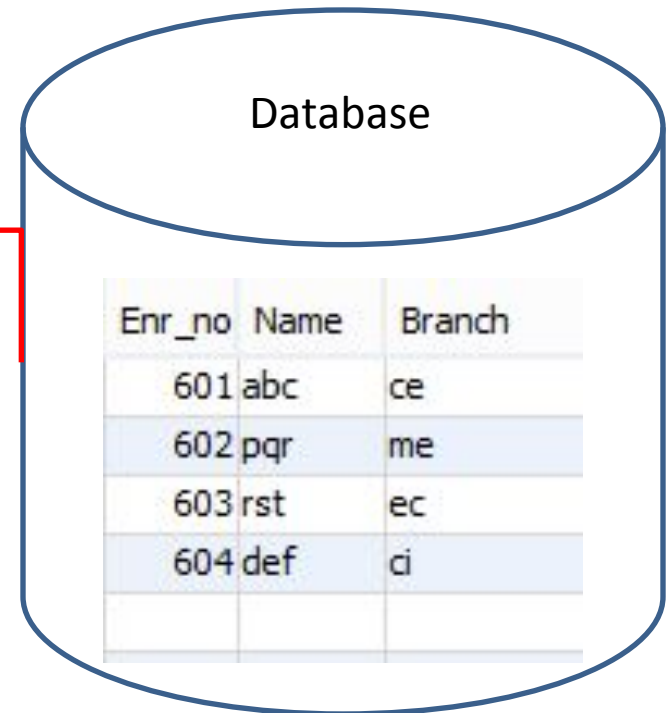

# Step 3: Executing Statement

```
ResultSet rs = stmt.executeQuery
```

```
("SELECT * FROM diet WHERE  
Enr_no='601' OR Enr_no='602'");
```

ResultSet rs

Enr_no	Name	Branch
601	abc	ce
602	pqr	me



Java  
Application

Database

Enr_no	Name	Branch
601	abc	ce
602	pqr	me
603	rst	ec
604	def	ci

# Step 4: Processing data returned by the DBMS

- Method: Resultset

<code>boolean next()</code> Throws <code>SQLException</code>	Moves the cursor forward one row from its current position.
<code>String getString</code> <code>(int col_Index)</code> throws <code>SQLException</code>	Retrieves the value of the designated column in the current row of this <code>ResultSet</code> object as a <code>String</code>
<code>String getString</code> <code>(String col_Label)</code> throws <code>SQLException</code>	Retrieves the value of the designated column in the current row of this <code>ResultSet</code> object as a <code>String</code> in the Java programming language.
<code>int getInt</code> <code>(int columnIndex)</code> throws <code>SQLException</code>	Returns the <code>int</code> in the current row in the specified column index.
<code>int getInt</code> <code>(String columnLabel)</code> throws <code>SQLException</code>	Retrieves the value of the designated column in the current row

# Processing data returned by the DBMS

- Example

```
while(rs.next())  
{  
    System.out.println(rs.getString(1));  
    System.out.println(rs.getInt("emp_id"));  
}
```

Returns the value of  
specified Column number

Returns the value of specified Column name

# Step 5: Terminating Connection with DBMS

---

- The connection of DBMS is terminated by using close() method.

## *Example*

```
rs.close() ;
```

Releases this ResultSet object's database and JDBC resources immediately

```
st.close() ;
```

Releases this Statement object's database and JDBC resources immediately


```
con.close() ;
```

Releases this Connection object's database and JDBC resources immediately

# JDBC with different RDBMS

RDBMS	JDBC driver name	URL format
MySQL	<code>com.mysql.jdbc.Driver</code>	<code>jdbc:mysql://hostname/databaseName</code>
ORACLE	<code>oracle.jdbc.driver.OracleDriver</code>	<code>jdbc:oracle:thin:@hostname:port Number:databaseName</code>
DB2	<code>com.ibm.db2.jdbc.net.DB2Driver</code>	<code>jdbc:db2:hostname:port Number /databaseName</code>
Sybase	<code>com.sybase.jdbc.SybDriver</code>	<code>jdbc:sybase:Tds:&lt;host&gt;:&lt;port&gt;</code>
SQLite	<code>org.sqlite.JDBC</code>	<code>jdbc:sqlite:C:/sqlite/db/databaseName</code>
SQLServer	<code>com.microsoft.sqlserver.jdbc.SQLServ erDriver</code>	<code>jdbc:microsoft:sqlserver: //hostname:1433;DatabaseName</code>

# JDBC Program

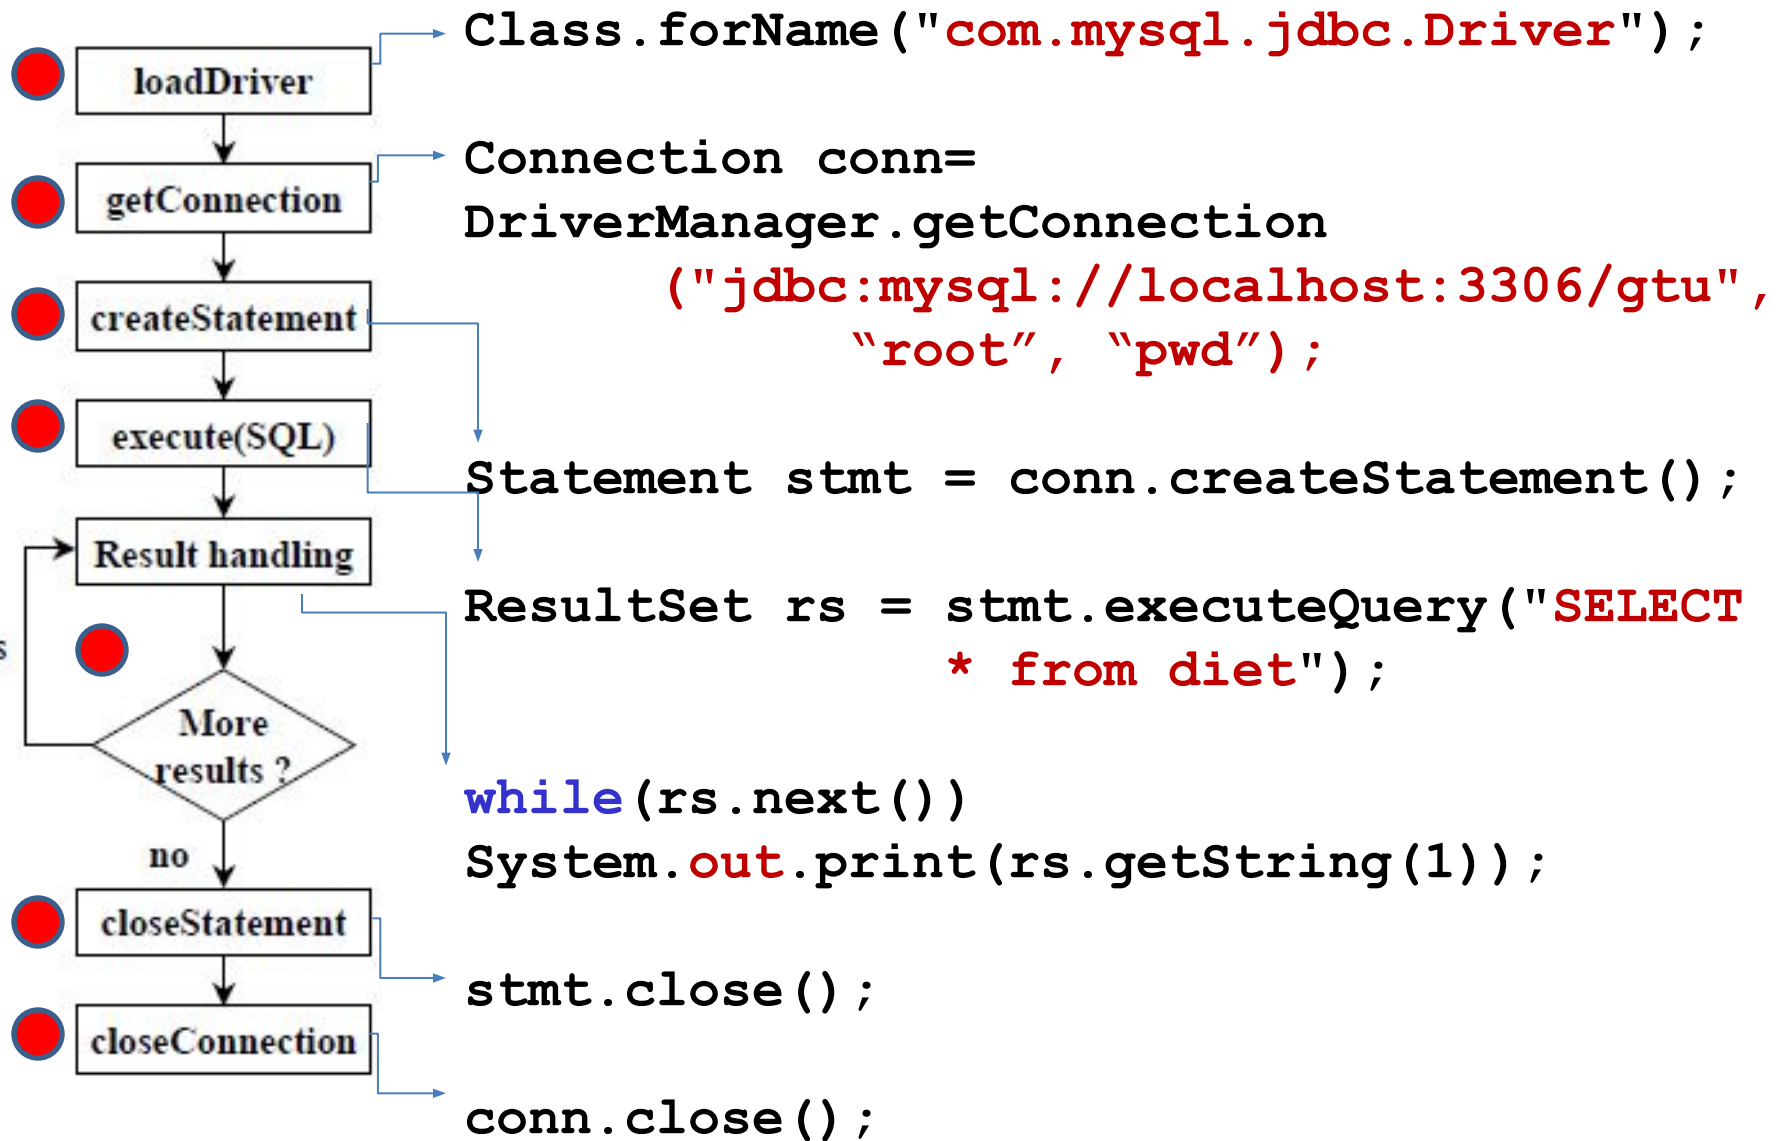


# First JDBC Program

```
1. import java.sql.*;
2. public class ConnDemo {
3.     public static void main(String[] args) {
4.         try {
5.             Class.forName("com.mysql.jdbc.Driver");
6.             Connection conn= DriverManager.getConnection
7.                 ("jdbc:mysql://localhost:3306/gtu","root","pwd");
8.             Statement stmt = conn.createStatement();
9.             ResultSet rs = stmt.executeQuery("SELECT * from diet");
10.            while(rs.next()){
11.                System.out.print(rs.getInt(1)+"\t");
12.                System.out.print(rs.getString("Name")+"\t");
13.                System.out.println(rs.getString(3));
14.            }//while
15.            stmt.close();
16.            conn.close();
17.        }catch(Exception e){System.out
18.        }//PSVM    }//class
```

Dataabase name

Table name

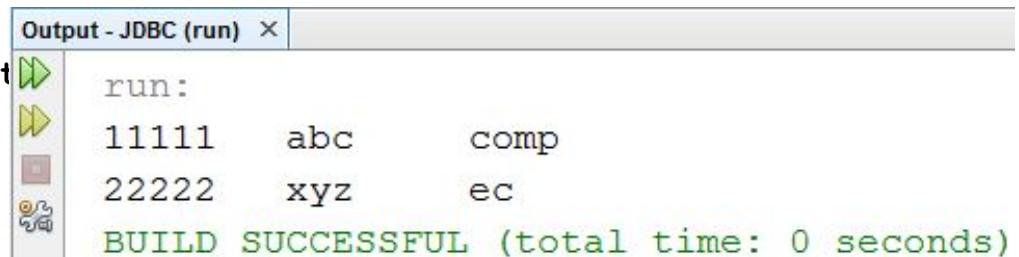


```
Output - JDBC (run) x
run:
11111    abc    comp
22222    xyz    ec
BUILD SUCCESSFUL (total time: 0 seconds)
```



# Types of Statement

- The JDBC *Statement*, *PreparedStatement* and *CallableStatement* interface define the methods and properties that enable you to send SQL or PL/SQL commands and receive data from your database.

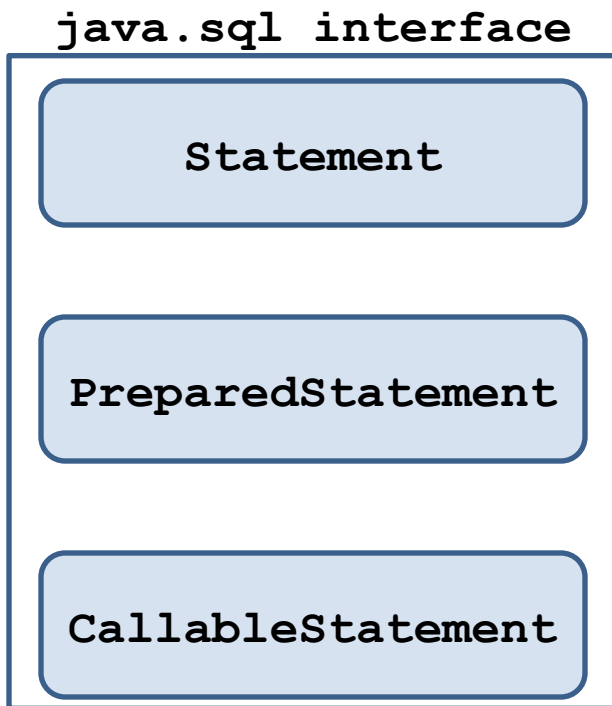

Used for general-purpose access to your database.

Used for static SQL statements. the SQL statement is precompiled. The PreparedStatement interface accepts input parameters at runtime.

Used when you want to access the database **stored procedures**. The CallableStatement interface can also accept runtime input parameters.

# Prepared Statement

---

- The *PreparedStatement* interface extends the *Statement* interface.
- It represents a **precompiled** SQL statement.
- A SQL statement is precompiled and stored in a Prepared Statement object.
- This object can then be used to efficiently execute this statement multiple times.

## Example

```
String query="insert into student values(?,?,?)";
```

# Methods of PreparedStatement interface

public void <b>setInt</b> (int paramIndex, int value)	Sets the integer value to the given parameter index.
public void <b>setString</b> (int paramIndex, String value)	Sets the String value to the given parameter index.
public void <b>setFloat</b> (int paramIndex, float value)	Sets the float value to the given parameter index.
public void <b>setDouble</b> (int paramIndex, double value)	Sets the double value to the given parameter index.
public int <b>executeUpdate</b> ()	Executes the query. It is used for create, drop, insert, update, delete etc.
public ResultSet <b>executeQuery</b> ()	Executes the select query. It returns an instance of ResultSet.

# Prepared Statement

---


- Now to create table in mysql.

```
create table gtu.DietStudent
(
    Enr_no VARCHAR(10) not null
    Name VARCHAR(20) ,
    Branch VARCHAR(10) ,
    Division VARCHAR(10) ,
    primary key (Enr_no)
)
```

Enr_no	Name	Branch	Division

# Example of PreparedStatement that inserts the record

```
1. import java.sql.*;
2. public class PreparedInsert {
3.     public static void main(String[] args) {
4.         try {
5.             Class.forName("com.mysql.jdbc.Driver");
6.             Connection conn= DriverManager.getConnection
7.                 ("jdbc:mysql://localhost:3306/gtu", "root","pwd");
8.             String query="insert into dietstudent values(?, ?, ?, ?)";
9.             PreparedStatement ps=conn.prepareStatement(query);
10.            ps.setString(1, "14092"); //Enr_no
11.            ps.setString(2, "abc_comp"); //Name
12.            ps.setString(3, "computer"); //Branch
13.            ps.setString(4, "cx"); //Division
14.            int i=ps.executeUpdate();
15.            System.out.println("no. of rows updated =" +i);
16.            ps.close();
17.            conn.close();
18.        } catch (Exception e) {System.out.println(e.toString());} } //PSVM
    } //class
```

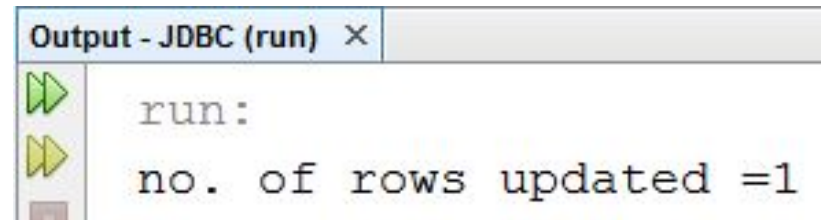

The screenshot shows a window titled "Output - JDBC (run) x". On the left, there are two green right-pointing arrows, indicating the program was executed successfully. The output text reads: "run:" followed by "no. of rows updated =1".

# Why to use PreparedStatement?

---

## Improves performance:

- The performance of the application will be **faster**, if you use PreparedStatement interface because **query is compiled only once**.
- This is because creating a PreparedStatement object by explicitly giving the SQL statement causes the statement to be precompiled within the database immediately.
- Thus, when the PreparedStatement is later executed, the DBMS does not have to recompile the SQL statement.
- Late binding and compilation is done by DBMS.
- Provides the programmatic approach to set the values.

# GTU Exam Question

1.	Show the use of PreparedStatement object to run precompiled SQL statement. Also write example of java snippet for PreparedStatement.[7]	Sum'16
2.	Explain the use of PreparedStatement with appropriate example.[7]	Win'16
3.	Explain role of Prepared Statement with example.[7]	Sum'17
4.	Write a program to insert student records to database using prepared statement.[7]	Win'17
5.	Explain the use of the PreparedStatement object of the JDBC with an appropriate example.[7]	Win'18
6.	Write difference between statement and prepared statement interface.[3]	Win'19

# Callable Statement

---

- CallableStatement interface is used to call the **stored procedures**.
- We can have business logic on the database by the use of stored procedures that will make the performance better as they are **precompiled**.

## *Example*

Suppose you need to get the **age** an employee based on the **date of birth**, you may create a procedure that receives date as the input and returns age of the employee as the output.



# Callable Statement

- Three types of parameters exist: IN, OUT, and INOUT. The PreparedStatement object only uses the IN parameter. The CallableStatement object can use all the three.

Parameter	Description
IN	A parameter whose value is unknown when the SQL statement is created. You bind values to IN parameters with the setXXX() methods.
OUT	A parameter whose value is supplied by the SQL statement it returns. You retrieve values from the OUT parameters with the getXXX() methods.
INOUT	A parameter that provides both input and output values. You bind variables with the setXXX() methods and retrieve values with the getXXX() methods.

# Callable Statement

- Create mysql procedure to get book title for given

```
DELIMITER @@
DROP PROCEDURE gettitle @@
CREATE PROCEDURE gtu.gettitle
(IN isbn_no INT, OUT btitle VARCHAR(30))
BEGIN
    SELECT title INTO btitle
    FROM book
    WHERE isbn_no = isbn;
END @@
DELIMITER ;
```

DB Column Name


DB Column Name

*Table: book*

isbn	title	author
1201	j2ee	jim keogh
1202	j2se	herbert schilgt
1203	uml	james rambaugh

# Example CallableStatement

```
1. import java.sql.*;
2. public class CallableDemo {
3.     public static void main(String[] args) {
4.         try {
5.             Class.forName("com.mysql.jdbc.Driver");
6.             Connection conn= DriverManager.getConnection
7.                 ("jdbc:mysql://localhost:3306/gtu", "root","pwd");
8.             CallableStatement cs=conn.prepareCall("{call gettitle(?,?)}");
9.             cs.setInt(1,1201);
10.            cs.registerOutParameter(2,Types.VARCHAR);
11.            cs.execute();
12.            System.out.println(cs.getString(2));
13.            cs.close();
14.            conn.close();
15.        }catch(Exception e){System.out.println(e.toString());}
16.    }//PSVM
17. }//class
```

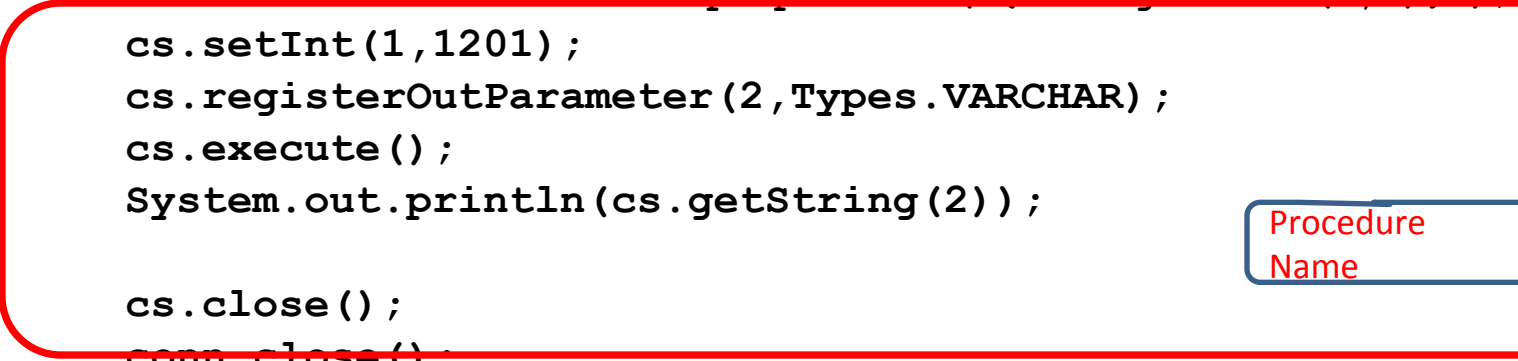

Procedure  
Name

# GTU Exam Question

1.	Explain role of Callable Statement with example[7]	Sum'17
2.	Discuss CallableStatement with example.[4]	Win'17
3.	What is CallableStatement? Show that how to use it to call a stored procedure running at database layer.[7]	Win'18

# Method: ResultSet

---

## Categories

1.	Navigational methods	Used to move the cursor around.
2.	Get methods	Used to view the data in the columns of the current row being pointed by the cursor.
3.	Update methods	Used to update the data in the columns of the current row. The updates can then be updated in the underlying database as well.

# ResultSet: Navigational methods

boolean <b>first()</b> throws SQLException	Moves the cursor to the first row.
boolean <b>last()</b> throws SQLException	Moves the cursor to the last row.
boolean <b>next()</b> throws SQL Exception	Moves the cursor to the next row. This method returns false if there are no more rows in the result set.
boolean <b>previous()</b> throws SQLException	Moves the cursor to the previous row. This method returns false if the previous row is off the result set.
boolean <b>absolute(int row)</b> throws SQLException	Moves the cursor to the specified row.
boolean <b>relative(int row)</b> throws SQLException	Moves the cursor the given number of rows forward or backward, from where it is currently pointing.
int <b>getRow()</b> throws SQLException	Returns the row number that the cursor is pointing to.

# ResultSet: Get methods

int <b>getInt(String columnName)</b> throws SQLException	Returns the int in the current row in the column named columnName.
int <b>getInt(int columnIndex)</b> throws SQLException	Returns the int in the current row in the specified column index. The column index starts at 1, meaning the first column of a row is 1, the second column of a row is 2, and so on.
String <b>getString(String columnLabel)</b> throws SQLException	Retrieves the value of the designated column in the current row of this ResultSet object as a String in the Java programming language.
String <b>getString(int columnIndex)</b> throws SQLException	Retrieves the value of the designated column in the current row of this ResultSet object as a String in the Java programming language.

# ResultSet: Update methods

void <b>updateString</b> (int col_Index, String s) throws SQLException	Changes the String in the specified column to the value of s.
void <b>updateInt</b> (int col_Index, int x) throws SQLException	Updates the designated column with an int value.
void <b>updateFloat</b> (int col_Index, float x) throws SQLException	Updates the designated column with a float value.
void <b>updateDouble</b> (int col_Index,double x) throws SQLException	Updates the designated column with a double value.



# Types of ResultSet

Type	Description
<b>ResultSet.TYPE_FORWARD_ONLY</b>	The cursor can only move forward in the result set.
<b>ResultSet.TYPE_SCROLL_INSENSITIVE</b>	The cursor can scroll forward and backward, and the result set is not sensitive to changes made by others to the database that occur after the result set was created.
<b>ResultSet.TYPE_SCROLL_SENSITIVE</b>	The cursor can scroll forward and backward, and the result set is sensitive to changes made by others to the database that occur after the result set was created.

*Default  
Type*

# Concurrency of ResultSet

---

Concurrency	Description
<b>ResultSet.CONCUR_READ_ONLY</b>	Creates a read-only result set.
<b>ResultSet.CONCUR_UPDATABLE</b>	Creates an updateable result set.

*Default  
Type*

# ResultSet

```
try {  
    Statement stmt = conn.createStatement(  
        ResultSet.TYPE_FORWARD_ONLY,  
        ResultSet.CONCUR_READ_ONLY) ;  
}  
catch (Exception ex)  
{  
    . . .  
}
```

ResultSet Type

ResultSet Concurrency

# GTU Exam Question

1.	What is ResultSet interface. Write various method for ResultSet interface. Write a code to update record using this interface.[7]	Win'19
----	---	--------

# ResultSetMetaData Interface

---

- The metadata means data about data.
- If you have to get metadata of a table like
  - i. total number of column
  - ii. column name
  - iii. column type etc.
- ResultSetMetaData interface is useful because it provides methods to get metadata from the ResultSet object.

# Method: ResultSetMetaData

---

int <b>getColumnCount()</b> throws SQLException	it returns the total number of columns in the ResultSet object.
String <b>getColumnName(int index)</b> throws SQLException	it returns the column name of the specified column index.
String <b>getColumnTypeName(int index)</b> throws SQLException	it returns the column type name for the specified index.

# ResultSetMetaData

```
1. import java.sql.*;
2. public class MetadataDemo {
3.     public static void main(String[] args) {
4.         try {Class.forName("com.mysql.jdbc.Driver");
5.             Connection conn= DriverManager.getConnection(
6.                 "jdbc:mysql://localhost:3306/psvm", "root", "root");
7.             Statement stmt = conn.createStatement(
8.                 (ResultSet.TYPE_FORWARD_ONLY,ResultSet.CONCUR_READ_ONLY);
9.             ResultSet rs = stmt.executeQuery("SELECT * from qtu");
10.             ResultSetMetaData rsmd=rs.getMetaData();
11.             System.out.println("Total columns: "+rsmd.getColumnCount());
12.             System.out.println("Column Name of 1st column: "+rsmd.getColumnName(1));
13.             System.out.println("Column Type Name of 1st column: "+rsmd.getColumnTypeName(1));
14.             stmt.close();
15.             conn.close();
16.         } catch (Exception e) {System.out.println(e.toString());}
17.     } //PSVM
18. } //class
```

Output - JDBC (run)

```
run:
Total columns: 3
Column Name of 1st column: Enr_no
Column Type Name of 1st column: INT
BUILD SUCCESSFUL (total time: 0 seconds)
```

# DatabaseMetadata

---

- DatabaseMetaData interface provides methods to get meta data of a database such as
  1. database product name,
  2. database product version,
  3. driver name,
  4. name of total number of tables etc.



# DatabaseMetadata

---

```
1. Connection con = DriverManager.getConnection
   ("jdbc:mysql://localhost:3306/temp6","root","root");

2. DatabaseMetaData dbmd=con.getMetaData();

3. System.out.println("getDatabaseProductName:"
   +dbmd.getDatabaseProductName());

4. System.out.println("getDatabaseProductVersion():"
   +dbmd.getDatabaseProductVersion());

5. System.out.println("getDriverName():"+dbmd.getDriverName());

6. System.out.println("getDriverVersion():"
   +dbmd.getDriverVersion());

7. System.out.println("getURL():"+dbmd.getURL());


8. System.out.println("getUserName():"+dbmd.getUserName());
```

# GTU Exam Question


1.	Explain use of DatabaseMetaData with example.[3]	Sum'18 Win'18
2.	Explain ResultSetMetaData with suitable program. [3]	Win'18

# Executing SQL updates

```
1. import java.sql.*;
2. class UpdateDemo{
3. public static void main(String args[]){
4. try{ Class.forName("com.mysql.jdbc.Driver");
5.      Connection con=DriverManager.getConnection(
6.      "jdbc:mysql://localhost:3306/GTU","root","root");
7.      Statement stmt=con.createStatement();
8.      String query="update diet set Name='abc601' where
9.                  Enr_no=601";
10.     int i=stmt.executeUpdate(query);
11.     System.out.println("total no. of rows
12. updated="+i);
13.     stmt.close();
14.     con.close();
15. }catch(Exception e){ System.out.println(e); }
16. }
```

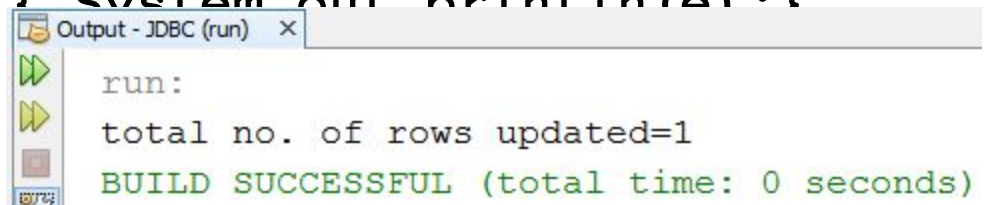

# Transaction Management

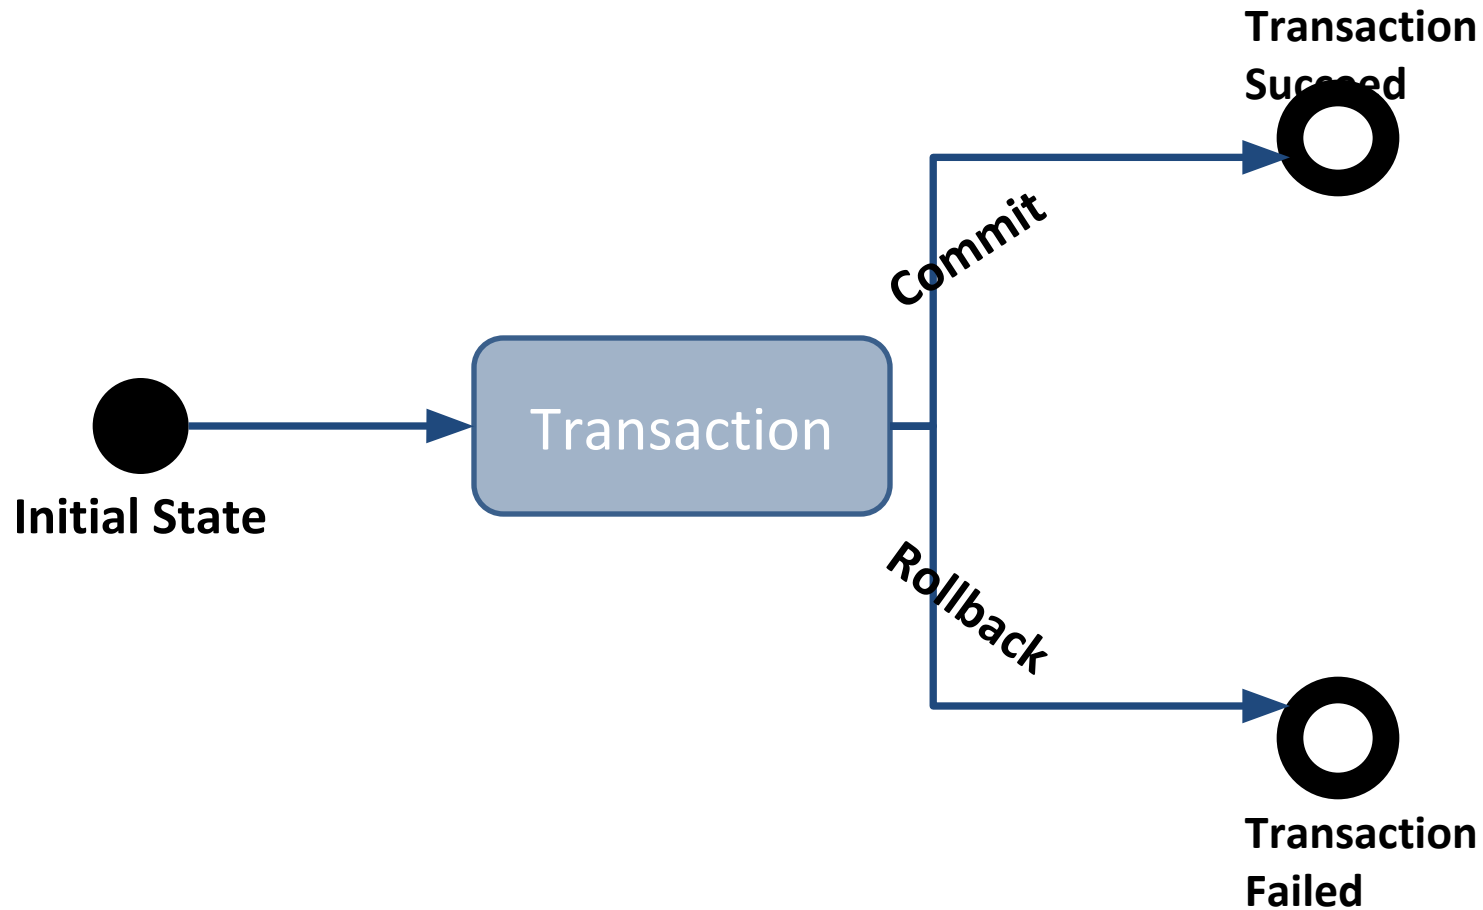

# Transaction Management

---

- In JDBC, **Connection interface** provides methods to manage transaction.

void <b>setAutoCommit</b> (boolean status)	It is true <b>by default</b> , means each transaction is committed by default.
void <b>commit</b> ()	commits the transaction.
void <b>rollback</b> ()	cancels the transaction.

# Transaction Management:commit

```
1. import java.sql.*;
2. class CommitDemo{
3. public static void main(String args
4. try{
5.     Class.forName("com.mysql.jdbc.Driver");
6.     Connection con=DriverManager.getConnection(
7.
8.         "jdbc:mysql://localhost:3306/GTU",
9.         "con.setAutoCommit(false); //by default
10.     Statement stmt=con.createStatement();
11.     int i=stmt.executeUpdate("insert into diet
12.                             values(605,'def','ci')");
13.     System.out.println("no. of rows inserted="+i);
14.     con.commit(); //commit transaction
15.     con.close();
16. }catch(Exception e){ System.out.println(e); }
17. }}
```

SELECT \* FROM diet X

#	Enr_no	Name	Branch
1	601	abc	ce
2	602	pqr	me
3	603	rst	ec
4	604	def	ci
5	605	def	ci

Output - JDBC (run) x

```
run:
no. of rows inserted=1
BUILD SUCCESSFUL (total time: 2 seconds)
```

# Transaction Management:rollback

```
1. import java.sql.*;
2. class RollbackDemo{
3. public static void main(String args[])
4. try{ Class.forName("com.mysql.jdbc.Driver");
5.     Connection con=DriverManager.getConnection(
6.         "jdbc:mysql://localhost:3306/","root","root");
7.     con.setAutoCommit(false); //by default
8.     Statement stmt=con.createStatement();
9.     int i=stmt.executeUpdate("insert into diet
10.         values(606,'ghi','ee')");
11.     con.commit(); //Commit Transaction
12.     i+=stmt.executeUpdate("insert into diet
13.         values(607,'mno','ch')");
14.     System.out.println("no. of rows inserted="+i);
15.     con.rollback(); //Rollback Transaction
16.     con.close();
17. } catch (Exception e) { System.out.println(e.getMessage()); }
18. }
```

SELECT \* FROM diet X

#	Enr_no	Name	Branch
1	601	abc	ce
2	602	pqr	me
3	603	rst	ec
4	604	def	ci
5	605	def	ci
6	606	ghi	ee

Output - JDBC (run) X

run:

no. of rows inserted=2

BUILD SUCCESSFUL (total time: 0 seconds)

# Batch Processing in JDBC

---

- Instead of executing a single query, we can execute a batch (group) of queries.
- It makes the performance fast.
- The `java.sql.Statement` and `java.sql.PreparedStatement` interfaces provide methods for batch processing.

## *Methods of Statement interface*

---

<code>void <b>addBatch</b>(String query)</code>	It adds query into batch.
<code>int[] <b>executeBatch</b>()</code>	It executes the batch of queries.



# Batch Processing in JDBC


```
1. Class.forName("com.mysql.jdbc.Driver");
2. Connection con=DriverManager.getConnection(
3.     "jdbc:mysql://localhost:3306/GTU","root","root");
4. con.setAutoCommit(false);
5. Statement stmt=con.createStatement();
6. String query1,query2,query3,query4,query5;
7. query1="create table DietStudent(enr INT PRIMARY KEY, name
8.     VARCHAR(20),sem
9.     INT,branch VARCHAR(10))";
10. query2="insert into DietStudent values(6001,'java',6,'ce')";
11. query3="insert into DietStudent values(6002,'php',6,'ce')";
12. query4="update DietStudent set name='cg' where enr=6002";
13. query5="delete from DietStudent where name='java'";
14. stmt.addBatch(query1);
15. stmt.addBatch(query2);
16. stmt.addBatch(query3);
17. stmt.addBatch(query4);
18. stmt.addBatch(query5);
19. int[] i=stmt.executeBatch();
20. con.commit();
```

Create table

Insert record

Update record

Delete record

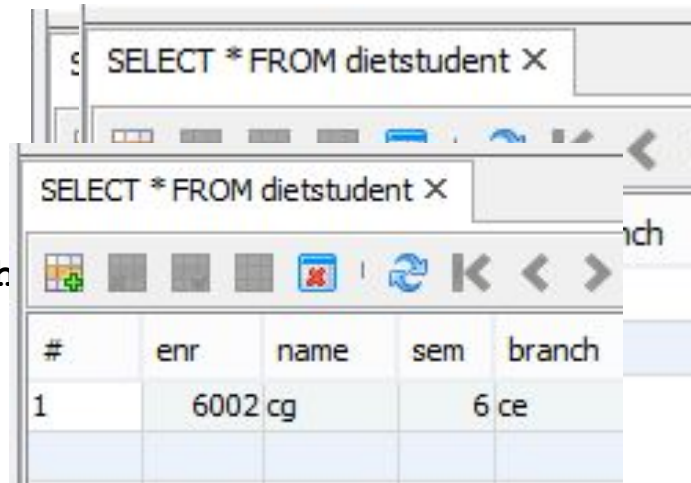

The screenshot shows a database query result for the query "SELECT \* FROM dietstudent X". The result is displayed in a table with the following data:

#	enr	name	sem	branch
1	6002	cg	6	ce

# Transaction Isolation Level

---

- JDBC isolation level represents that, how a database maintains its interiority against the problem such as
  1. dirty reads
  2. non-repeatable reads
  3. phantom readsthat occurs during concurrent transactions.

# Transaction Isolation Level

---

## What is Phantom read?

- At the time of execution of a transaction, if two queries that are identical and executed, and the no. of rows returned are different from other.
- If you execute a query at time T1 and re-execute it at time T2, additional rows may have been added/deleted to/from the database, which may affect your results.
- It is stated that a **phantom read** occurred.

# Transaction Isolation Level

---

## What is Dirty read?

- Dirty read occurs when one transaction is changing the record, and the other transaction can read this record before the first transaction has been committed or rolled back.
- This is known as a dirty read scenario because there is always a possibility that the first transaction may rollback the change, resulting in the second transaction having read an invalid data.

Transaction A begins <b>UPDATE EMPLOYEE SET SALARY = 10000 WHERE EMP_ID= '123' ;</b>	Transaction B begins <b>SELECT * FROM EMPLOYEE ;</b> (Transaction B reflects data which is updated by transaction A. But, those updates have not yet been committed).
---	---

# Transaction Isolation Level

---

## What is Non-Repeatable Read?

- Non Repeatable Reads happen when in a **same transaction** same query yields to a different result.
- This occurs when one transaction repeatedly retrieves the data, while a difference transactions alters the underlying data.
- This causes the different or non-repeatable results to be read by the first transaction.

# Transaction Isolation Level:program

---

```
1. public class IsolationDemo {
2.     public static void main(String[] args) throws
        ClassNotFoundException, SQLException {
3.         Class.forName("com.mysql.jdbc.Driver");
4.         Connection con=DriverManager.getConnection
("jdbc:mysql://localhost:3306/ce17","root","diet");
5.         Statement st=con.createStatement();
6.         System.out.println("getTransactionIsolation="
            +con.getTransactionIsolation());
7.         con.setTransactionIsolation(TRANSACTION_SERIALIZABLE);
8.         System.out.println("NEW getTransactionIsolation="
            +con.getTransactionIsolation());
9.     }
10. }
```

# Phantom reads vs Non-repeatable reads

## Phantom

Reads	Transaction A	Transaction B
T1	Read n=5	
T2		Read n=5
T3	Delete n	
T4		Read n

Variable  
Undefined

## Non-Repeatable

Reads	Transaction A	Transaction B
T1	Read n=5	
T2		Read n=5
T3	Update=8	
T4		Read n=8

Same query had  
retrieved two  
different value

# Transaction Isolation Level

Int Val.	Isolation Level	Description
1	TRANSACTION_READ_UNCOMMITTED	It allows non-repeatable reads, dirty reads and phantom reads to occur
2	TRANSACTION_READ_COMMITTED	It ensures only those data can be read which is committed. Prevents dirty reads.
4	TRANSACTION_REPEATABLE_READ	It is closer to serializable, but phantom reads are also possible. Prevents dirty and non-repeatable reads.
8	TRANSACTION_SERIALIZABLE	In this level of isolation dirty reads, non-repeatable reads, and phantom reads are prevented.

One can get/set the current isolation level by using methods of Connection interface:

1. **getTransactionIsolation()**
2. **setTransactionIsolation(int isolationlevelconstant)**



# SQL Exception

java.sql.SQLException	It is a core JDBC exception class that provides information about database access errors and other errors. Most of the JDBC methods throw SQLException.
java.sql. BatchUpdateException	It provides the update counts for all commands that were executed successfully during the batch update.
java.sql.DataTruncation	reports a DataTruncation warning (on reads) or throws a DataTruncation exception (on writes) when JDBC unexpectedly truncates a data value.
java.sql.SQLWarning	provides information about database access warnings.

# GTU Questions:

1.	What is JDBC? List out different types of JDBC driver and explain role of each. Write code snippet for each type of JDBC connection. Explain Thick and Thin driver. Comment on selection of driver.	[Sum -16] [Win -16] [Sum -18] [Win -18] [Win -19]
2.	Explain Prepared statements with suitable example	[Sum -16] [Win -16] [Win -17] [Win -18]
3.	Give the use of Statement, PreparedStatement and CallableStatement object. Write code to insert three records into student table using PreparedStatement (assume student table with Name, RollNo, and Branch field).	[Win -14]
4.	What is phantom read in JDBC? Which isolation level prevents it?	[Sum -16]
5.	Discuss CallableStatement with example.	[Win -17] [Win -18]
6.	What is ResultSet interface. Write various method for ResultSet interface. Write a code to update record using this interface.	[Win -19]

# GTU Questions:

7.	Explain JDBC Transaction Management in detail.	[Win -19]
8.	Explain use of DatabaseMetaData with example.	[Sum -18] [Win -18]
9.	Explain ResultSetMetaData with suitable program.	[Win -18]
10.	Write a sample code to store image in Database.	[Win -19]

# JDBC Interview Questions

1.	What is the difference between execute, executeQuery, executeUpdate?
2.	What are the benefits of PreparedStatement over Statement?
3.	What is JDBC Savepoint? How to use it?
4.	What is JDBC Connection isolation levels?
5.	What is CLOB and BLOB datatypes in JDBC?
6.	What is difference between java.util.Date and java.sql.Date?
7.	What is SQL Warning? How to retrieve SQL warnings in the JDBC program?
8.	Which type of JDBC driver is the fastest one?
9.	What is the return type of Class.forName() method?
10.	What happens if we call resultSet.getInt(0).
11.	How can we set null value in JDBC PreparedStatement?
12.	PreparedStatement are faster. Why?
13.	What are the exceptions in JDBC?