Original hyperbolic driver: early 3D puncture failure

Original 1D $N = 513$ reference vs 3D $n = 16$ per block | $M = 1/3$ | 12 MPI ranks / 12 GPU tiles

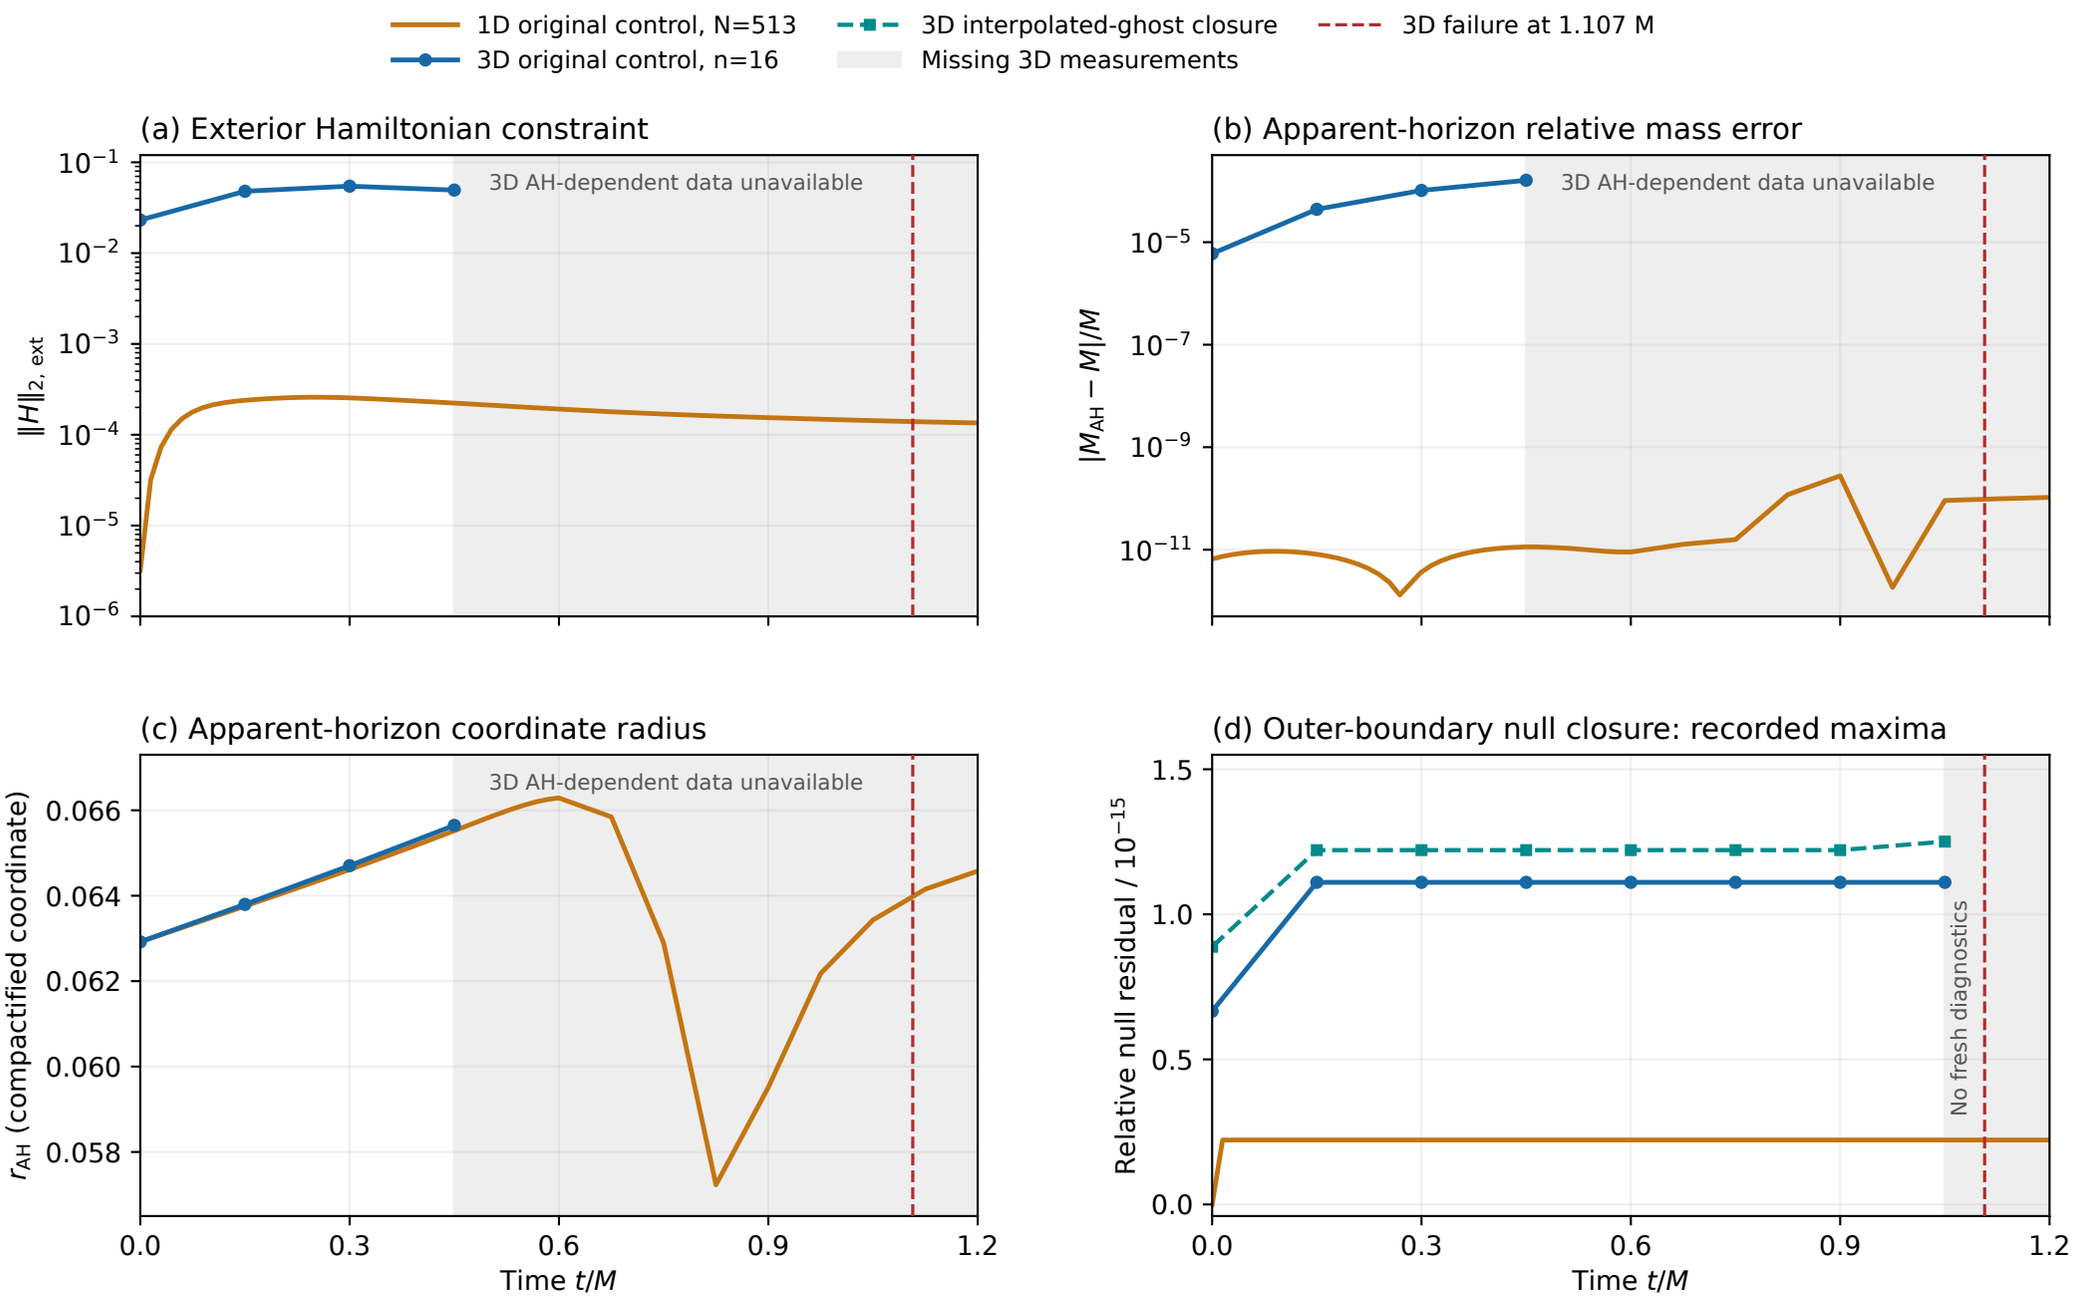

Last valid 3D horizon: 0.45 M; first rejected finder result: 0.60 M. Missing values are not filled or extrapolated.

Geometry rejection: 1.107 M; last diagnostics: 1.05 M. The saved failure checkpoint is not admitted.

H uses roughly comparable coordinate-volume weighting; 3D invariant and 1D radial momentum norms are not overlaid.

This failed low-resolution trajectory does not demonstrate a trumpet transition, long-time stability, or convergence.