

Agentic-AI

Agent-Builders

Gefördert durch:



Bundesministerium
für Forschung, Technologie
und Raumfahrt



Dr. Arman Nassirtoussi


Two Ways to Build Agents

Code

```
def agent():  
    tools = [...]  
    memory = ...  
    steps = [...]  
    return result  
...
```

Maximum flexibility
and control
using APIs and SDKs

Visual Builder

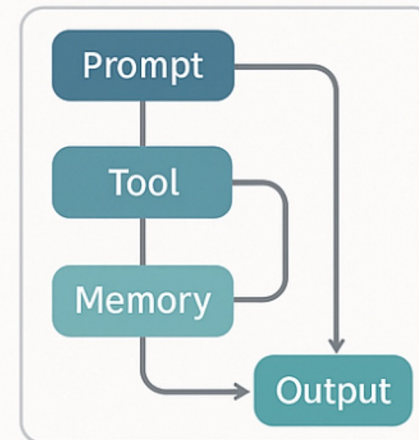

Design agents using
graphical interfaces
and workflows


Gefördert durch:




Bundesministerium
für Forschung, Technologie
und Raumfahrt

Dr. Arman Nassirtoussi

OpenAI Agent Builder

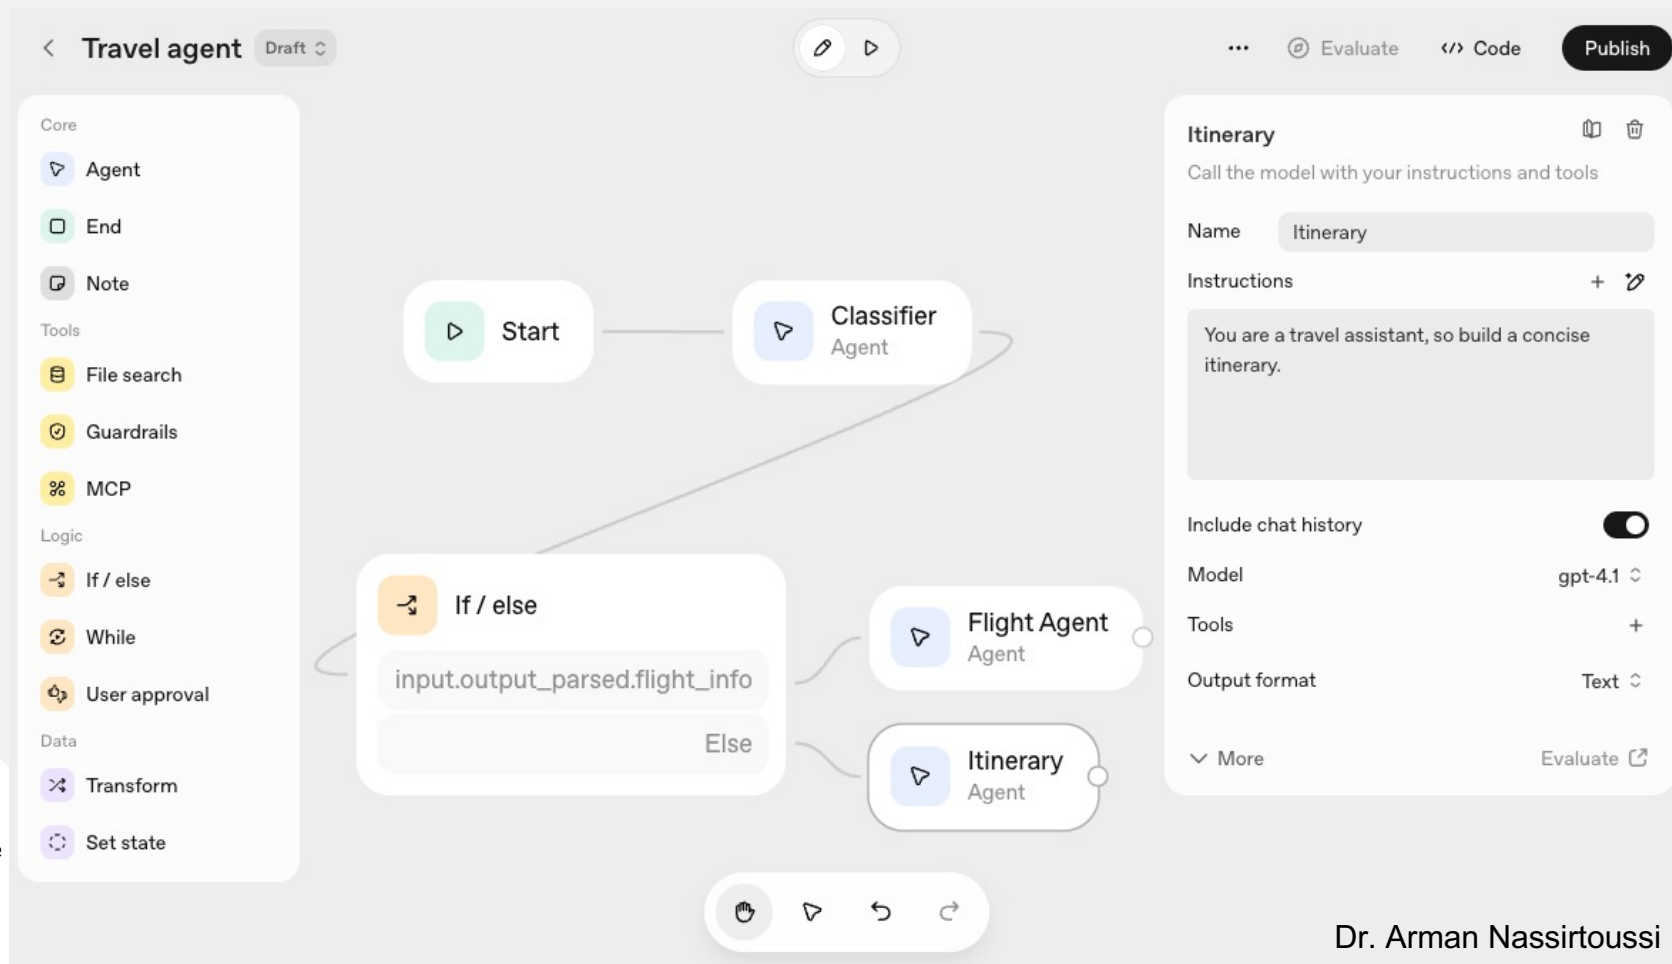

Gefördert durch:



Dr. Arman Nassirtoussi



Deploying Agents

Get code

ChatKit

Agents SDK

Follow the [ChatKit quickstart](#) and then paste the workflow ID below to embed this workflow into your product.

Add an allowed domain to use ChatKit

Add Domain

Workflow ID

wf_ ... 

Current version


Omit to use production

version="draft" 

 Quickstart

 Clone sample app

Gefördert durch:



Dr. Arman Nassirtoussi




Flowise


Add Nodes

Search nodes

- Agent
Dynamically choose and utilize tools during runtime, enabling multi-step reasoning
- Condition
Split flows based on If Else conditions
- Condition Agent
Utilize an agent to split flows based on dynamic conditions
- Custom Function
Execute custom function
- Direct Reply
Directly reply to the user with a message
- Execute Flow
Execute another flow
- HTTP
Send a HTTP request
- Human Input
Request human input, approval or rejection during execution
- Iteration
Execute the nodes within the iteration block through N iterations
- LLM
Large language models to analyze user-provided inputs and generate responses
- Loop
Loop back to a previous node
- Retriever
Retrieve information from vector database

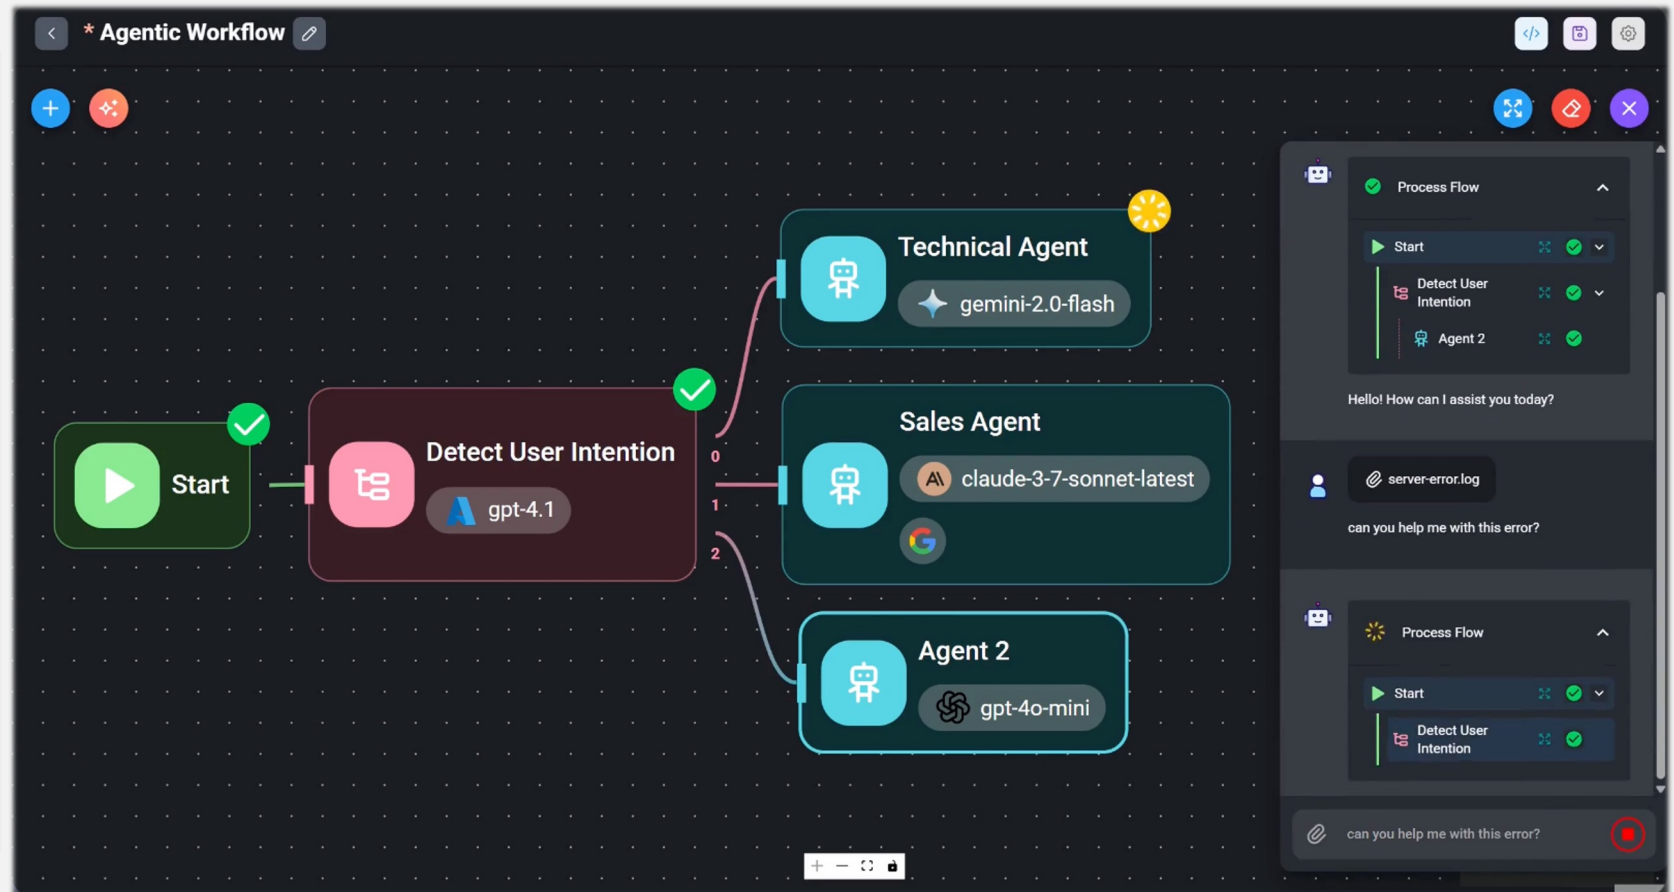

Gefördert durch:

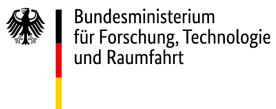


Ref: <https://flowiseai.com/>


Dr. Arman Nassirtoussi



Flowise Coordination Patterns

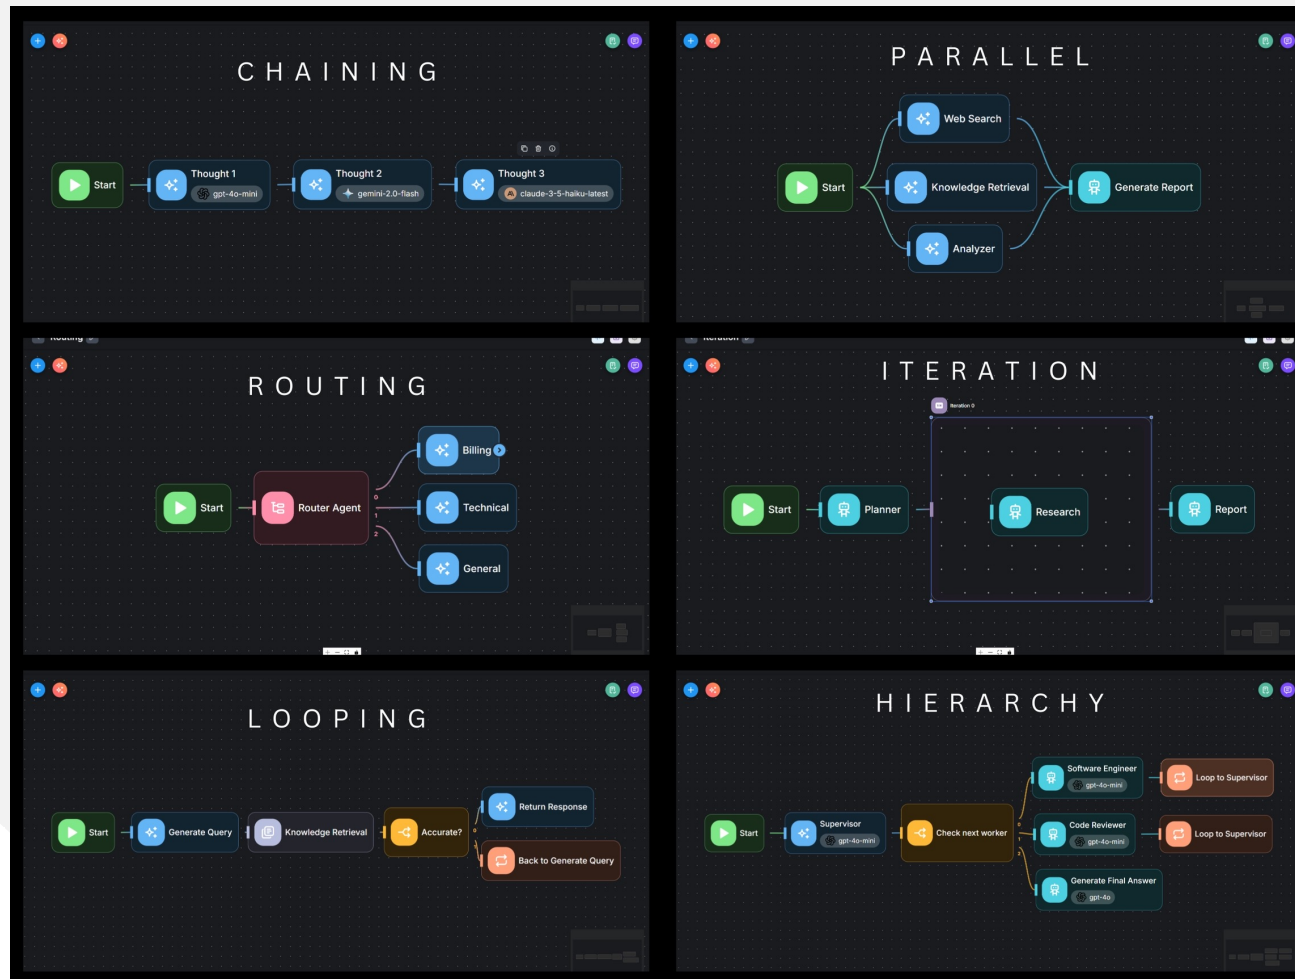

Gefördert durch:





Ref: <https://docs.flowiseai.com/using-flowise/agentflowv2>


Dr. Arman Nassirtoussi



Automation Platforms (n8n & Make.com)

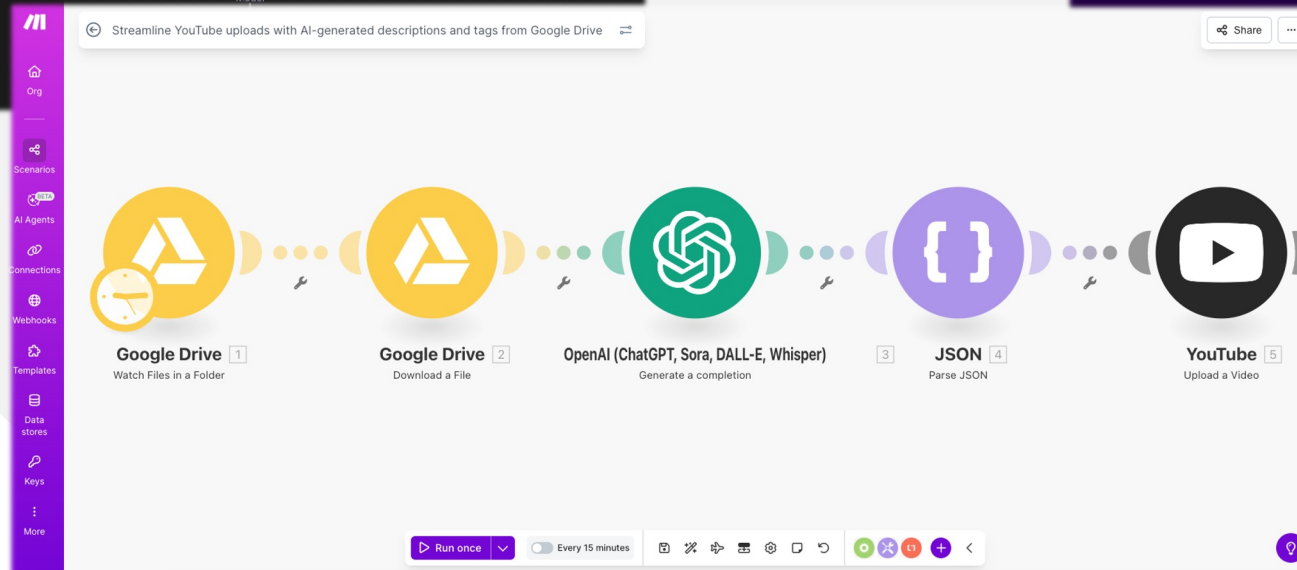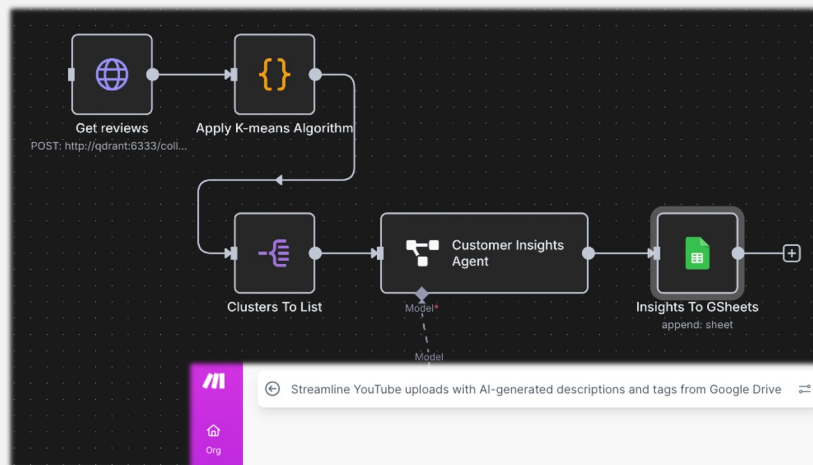

Gefördert durch:



Dr. Arman Nassirtoussi



LangFlow

```

1 class AgentComponent(AgentComponent):
2     display_name = "Agent"
3     icon = "robot"
4     beta = False
5     name = "Agent"
6
7     inputs = AgentComponent._base_inputs + [
8         MultilineInput(name="role", display_name="Role"),
9         HandleInput(name="llm", display_name="Language Model"),
10        HandleInput(name="tools", display_name="Tools"),
11        MultilineInput(name="input_message", display_name="Input Message"),
12        DataInput(name="chat_history", display_name="Chat History"),
13    ]
14
15    def create_agent_runnable(self):
16        if "input" not in self.user_prompt:
17            raise ValueError("Prompt must contain 'input'")
18        messages = [
19            ("system", self.system_prompt),
20            ("placeholder", "{chat_history}"),
21            HumanMessagePromptTemplate(PromptTemplate(
22                "placeholder", "{agent_scratchpad}"),
23            )
24        ]
25
26        llm = self.llm
27        tools = self.tools
28        role = self.role
29        input_message = self.input_message
30        chat_history = self.chat_history
31
32        return RunnableSequence.from_iterable([
33            RunnableParallel([
34                llm,
35                tools,
36            ]),
37            RunnableParallel([
38                role,
39                input_message,
40                chat_history,
41            ]),
42        ])

```


Agent
✓ 13ms

Role

You are a helpful assistant





Language Model *

+

Tools

+

Input Message *

Enter message to send the agent...




Gefördert durch:




Bundesministerium
für Forschung, Technologie
und Raumfahrt

Ref: <https://www.langflow.org/>


Dr. Arman Nassirtoussi



Summary

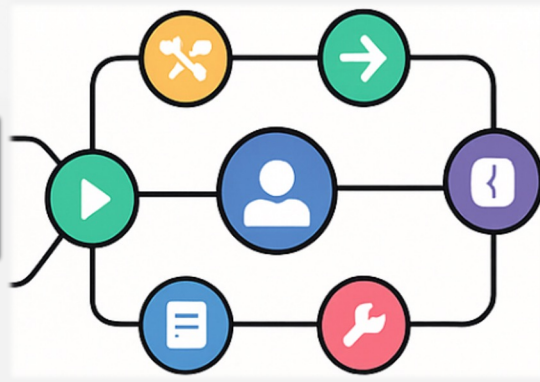

Gefördert durch:



Dr. Arman Nassirtoussi

