


*Optional Co

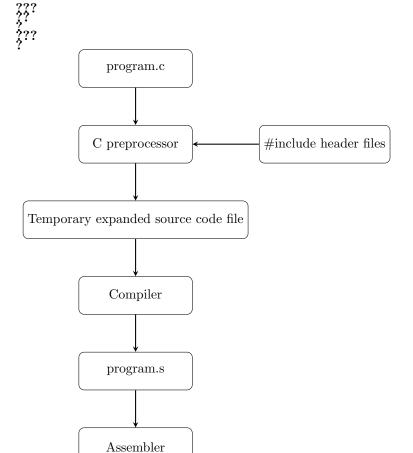

```
cl_device_id device_id = NULL;
cl_uint ret_num_devices;
ret = clGetDeviceIDs(platform_id, CL_DEVICE_TYPE_DEFAULT,
1, &device_id, &ret_num_devices);
```

```
cl_context context = NULL;
context = clCreateContext(NULL, 1, &device_id,
NULL, NULL, &ret);
```