


BIT 1204 Fundamentals of Website Development

HTML Basic Tags- Document Formatting

Getting started with HTML

Tags vs Elements vs Attributes in HTML

Note: Tags in HTML are not case-sensitive. This means they can be written in uppercase or lowercase. For example, a `<title>` tag could be written as `<title>`, `<TITLE>`, `<Title>`, `<TiTlE>`, etc., and it will work. However, it is best practice to write all tags in lowercase for consistency and readability.

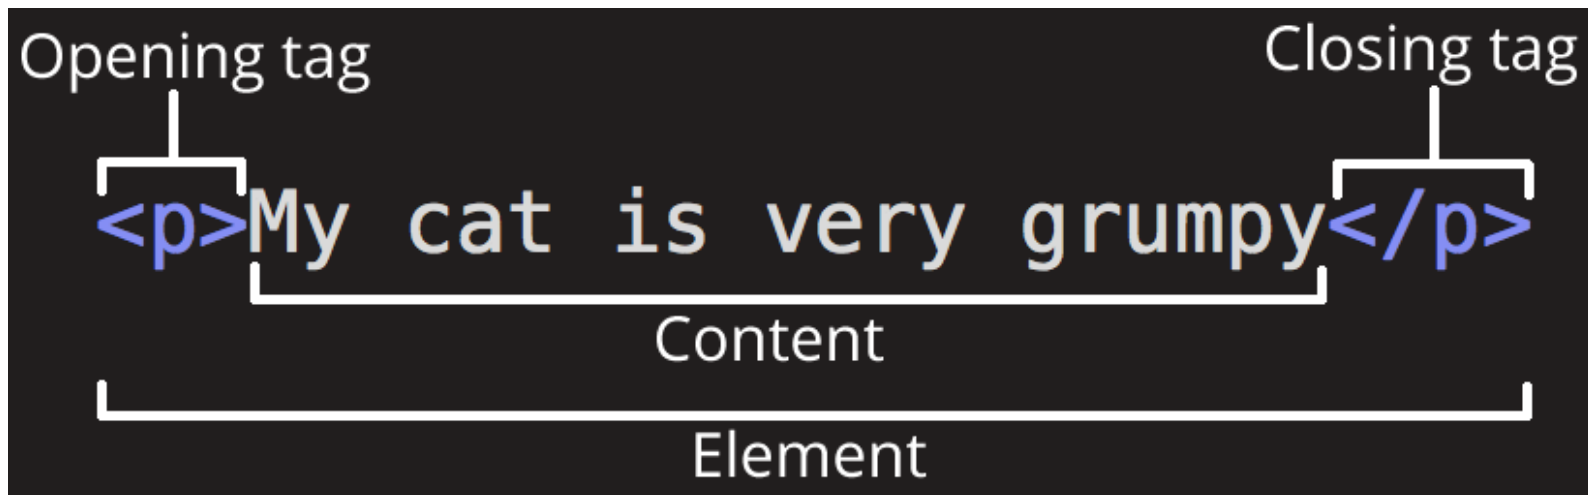

HTML Attributes

- HTML attributes provide additional information about HTML elements.
- Elements in HTML have **attributes**; these are additional values that configure the elements or adjust their behavior in various ways to meet the criteria the users want.
- All HTML elements can have **attributes**
- Attributes provide **additional information** about elements
- Attributes are always specified in **the start tag**
- Attributes usually come in name/value pairs like: **name="value"**

HTML Formatting Elements

Formatting elements were designed to display special types of text:

- `<b>` - Bold text
- `<strong>` - Important text
- `<i>` - Italic text
- `<em>` - Emphasized text
- `<mark>` - Marked text
- `<small>` - Smaller text
- `<del>` - Deleted text
- `<ins>` - Inserted text
- `<sub>` - Subscript text
- `<sup>` - Superscript text

Tag	Description
<code></code>	Defines bold text
<code></code>	Defines emphasized text
<code><i></code>	Defines a part of text in an alternate voice or mood
<code><small></code>	Defines smaller text
<code></code>	Defines important text
<code><sub></code>	Defines subscripted text
<code><sup></code>	Defines superscripted text
<code><ins></code>	Defines inserted text
<code></code>	Defines deleted text
<code><mark></code>	Defines marked/highlighted text

Example

An `<article>` element with nested `<h3>` and `<p>` elements.

The Palace Museum

The Palace Museum is a national museum housed in the Forbidden City at the core of Beijing, China. It was established in 1925 after the last Emperor of China was evicted from his palace, and opened its doors to the public.

```
<article>
```

```
<h3>The Palace Museum</h2>
```

```
<p>
```

```
The Palace Museum is a national museum housed in  
the Forbidden City at the core of Beijing, China.  
It was established in 1925 after the last Emperor  
of China was evicted from his palace, and opened  
its doors to the public.
```

```
</p>
```

```
</article>
```

Try it live ▶

HTML Attributes

Example

This example has 2 `<input>` elements with `type` attributes. The different attribute values create 2 totally different input controls: a text field, and a button.



```
<input type="text">  
<input type="button" value="Submit">
```

Try it live >

HTML style Attribute

Definition and Usage

The style attribute specifies an inline style for an element.

The style attribute will override any style set globally, e.g. styles specified in the <style> tag or in an external style sheet.

Example

I am Red

I am Blue

I am Big

Example

Set the background color for a page to powderblue:

```
<body style="background-color:powderblue;">

<h1>This is a heading</h1>
<p>This is a paragraph.</p>


</body>
```

Example

```
<h1 style="color:blue;">This is a heading</h1>
<p style="color:red;">This is a paragraph.</p>
```

Try it Yourself »

- Use the `style` attribute for styling HTML elements
- Use `background-color` for background color
- Use `color` for text colors
- Use `font-family` for text fonts
- Use `font-size` for text sizes
- Use `text-align` for text alignment

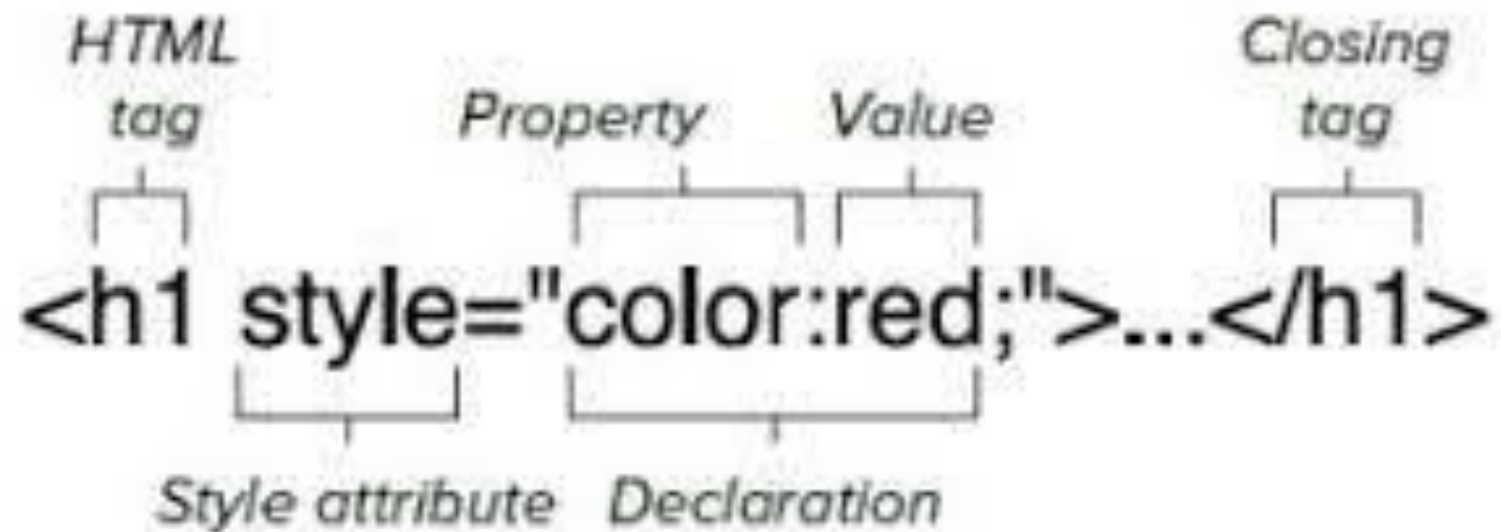

The general syntax for defining styles directly in an HTML tag.

Background Color

```
<html>
<head>
  <title></title>
</head>
<body>

  <body style="background-color:powderblue;"

  <h1>Faculty of Sceince (FoSTI)</h1>
  <p>Computer Sceince Dpt.</p>

</body>
</body>
</html>
```

```
<html>
<head>
  <title></title>
</head>
<body>

  <body bgcolor="#B6D0E2">

  <h1>Faculty of Sceince (FoSTI)</h1>
  <p>Computer Sceince Dpt.</p>

</body>
</body>
</html>
```

Faculty of Sceince (FoSTI)

Computer Sceince Dpt.

Text- Background Color

```
<html>
<head>
  <title></title>
</head>
<body>

  <body>

  <h1 style="background-color:powderblue;">Faculty of Sceince (FoSTI)</h1>
  <p style="background-color:tomato;">Computer Sceince Dpt</p>
</body>
</body>
</html>
```

Faculty of Sceince (FoSTI)

Computer Sceince Dpt

Text- Color

```
<html>
<head>
  <title></title>
</head>
<body>

  <body>

    <h1 style="color:blue;">Faculty of Sceince (FoSTI)</h1>
    <p style="color:red;">Computer Sceince Dpt.</p>

  </body>
</body>
</html>
```

Faculty of Sceince (FoSTI)

Computer Sceince Dpt.

Fonts

The `font-family` property defines the font to be used for an HTML element:

```
<html>
<head>
  <title></title>
</head>
<body>

  <body>

  <h1 style="color:blue; font-family:verdana ;">Faculty of Sceince (FoSTI)</h1>
  <p style="color:red; font-family: Algerian;">Computer Sceince Dpt.</p>

</body>
</body>
</html>
```

Faculty of Sceince (FoSTI)

COMPUTER SCEINCE DPT.

Text Size

The `font-size` property defines the text size for an HTML element:

```
<html>
<head>
  <title></title>
</head>
<body>

  <body>

  <h1 style=" font-size:300%;">Faculty of Sceince (FoSTI)</h1>
  <p style=" font-size: 200%;">Computer Sceince Dpt</p>

</body>
</body>
</html>
```

Faculty of Sceince (FoSTI)

Computer Sceince Dpt

Text Alignment

The `text-align` property defines the horizontal text alignment for an HTML element:

```
<html>
<head>
  <title></title>
</head>
<body>

  <body bgcolor="tomato">

<h1 style="text-align: center; font-size:300%;">Faculty of Sceince (FoSTI)</h1>
<p style="text-align: right; font-size: 200%; color: #00FF00;">Computer Sceince Dpt</p>

</body>
</body>
</html>
```

Faculty of Sceince (FoSTI)

Computer Sceince Dpt