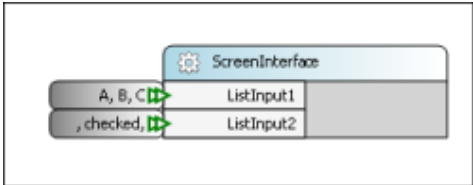
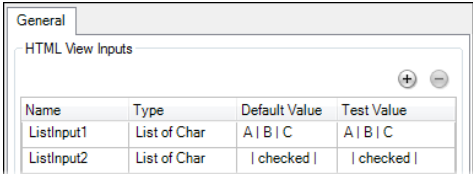



Attribute

```
<data-flx-attr = "[attribute]">
```

During runtime, the whole expression is replaced with the attribute value.

Inputs	HTML Layout Editor/HTML Editor	Runtime												
► DFC Function Navigation:  ► HTML View:  <table border="1"> <thead> <tr> <th>Name</th> <th>Type</th> <th>Default Value</th> <th>Test Value</th> </tr> </thead> <tbody> <tr> <td>ListInput1</td> <td>List of Char</td> <td>A B C</td> <td>A B C</td> </tr> <tr> <td>ListInput2</td> <td>List of Char</td> <td> checked </td> <td> checked </td> </tr> </tbody> </table>	Name	Type	Default Value	Test Value	ListInput1	List of Char	A B C	A B C	ListInput2	List of Char	checked	checked	 <pre>1 <div data-flx-iterate-children="1, ListInput1"> 2 <input type="checkbox" value="{ListInput1[i]}" data-flx-attr="{ListInput2[i]}" /> {ListInput1[i]} 3 </div> 4</pre> HTML code	 OK
Name	Type	Default Value	Test Value											
ListInput1	List of Char	A B C	A B C											
ListInput2	List of Char	checked	checked											