

Custom Snippets

It is possible to use Snippets in the [HTML Layout Editor](#) and [HTML Editor](#). The content and the location of the Snippets is fully customizable.

To Add a Custom Snippet

1. Create an XML file (below is a file structure description). Configure the custom Snippet content. To see an example, [click here](#)
2. Place the newly created XML file into location that is defined by "ScreenEditorCodeSnippetsLocation" key located in the "ProcessBuilder" section of the Central Configuration file (for details, see [Central Configuration Documentation](#)). By default it is set to <drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\Resources\Templates\CodeSnippets\.

XML File Structure

The file should contain three sections:

- ▶ **Header**
- ▶ **Snippet**
- ▶ **Snippet Options**

Header Section

This section consists of two subsections: **Title** and **Shortcut**.

- ▶ **Title** – the section that enables the changing of the Snippet title

```
<Header>
  <Title>Operator Cockpit Layout</Title>
  ...
</Header>
```

- ▶ **Shortcut** – if defined, the Snippet can be added using [Keyboard Shortcuts](#) (Snippet Header | + Tab).

Snippet Section

The section consists of two subsections: **Declarations** and **Code**.

- ▶ **Declarations** – the list of literals that will be available for use (highlighted text). Every literal has its ID number, default text and a tooltip
- ▶ **Code** – consists of the Snippet code, and inside this section you may define:
 - ▶ The location of the Declarations. Use a Declaration ID between \$ symbols (e.g., *\$Production\$*).
 - ▶ The language screen on which the snippet will be available. Use a Language attribute (if you want to specify more than one language, HTML language is required) (e.g., *<Code Language="CSS">*).

The Code section may appear more than once in the XML file. Each section has to have the other language attribute defined.

SnippetOptions Section

The section may consist of seven subsections: **Placeholders**, **Usages**, **EditorSnippetSubfolder**, **ContextMenuIndex**, **Icon**, **IntelliPromptContext**, and **ScreenElements**.

- 1. **Placeholders** – specifies a placeholder in HTML that should contain custom controls (Sub-DFC, Business Control, etc.). After dragging-and-dropping, the text will be automatically replaced with the dropped HTML

Code	User Interface
<pre><SnippetOptions> <Placeholders> <Placeholder><![CDATA[<!-- DROP (Header) HERE --> Header]]> </Placeholder> <Placeholder><![CDATA[<!-- DROP (Production Panel) HERE --> Production Panel]]></Placeholder> <Placeholder><![CDATA[<!-- DROP (OEE Panel) HERE --> OEE Panel]]> </Placeholder> <Placeholder><![CDATA[<!-- DROP (Alert List) HERE --> Alert List]]> </Placeholder> <Placeholder><![CDATA[<!-- DROP (Task List) HERE --> Task List]]> </Placeholder> <Placeholder><![CDATA[<!-- DROP (Footer) HERE --> Footer]]> </Placeholder> </Placeholders> ... </SnippetOptions></pre>	

- 2. **Usages** – defines the location of the Snippet. The Snippet may appear in four places: Toolbox, HTML Layout Editor Right-Click Menu, and two different HTML Layout Editor keyboard shortcuts (see [Keyboard Shortcuts on HTML Layout Editor](#))

<pre><SnippetOptions> ... <Usages>None ContextMenu EditorIntelliPrompt EditorCodeSnippets ToolBox All</Usages> ... </SnippetOptions></pre>
--

- 3. **EditorSnippetSubfolder** – defines the Snippet's subfolder name in:


- ▶ The toolbox where the Snippet will appear
- ▶ The editor Snippets under the `Ctrl+Shift+Space` [Keyboard Shortcut](#). You may also define more than one subfolder using ">" (e.g., `<EditorSnippetsSubfolder>Parent_folder > Child_folder</EditorSnippetsSubfolder>`)

Code	User Interface
<pre><SnippetOptions> ... <EditorSnippetsSubfolder>UI controls</EditorSnippetsSubfolder> ... </SnippetOptions></pre>	

4. **ContextMenuIndex** – defines the Snippet's location in the HTML Layout Editor right-click menu. The index value indicates the exact place of its appearance in the right-click menu. You cannot use the following values (see [HTML Layout Editor Right-Click Menu](#))

Value	Right-Click Menu Commands
10	Insert Input
20	Insert Literal
30	Link to Output
40	Iterate
50	Iterate Children
60	Filter
70	Set Boolean Attribute
80	Assign Key
90	Autoadvance
100	Autofocus

5. **Icon** – the file path to an image which will be displayed next to the Snippet title (appears in the Toolbox or in [HTML Layout Editor right-click menu](#)).
The icon must be placed in the location that is defined by the "ImageRepositoryUrl" key located in the "Media" section of the Central Configuration file (for details, see [Central Configuration Documentation](#)). Recommended icon size is 16x16 pixels and recommended icon format is PNG.
For example:

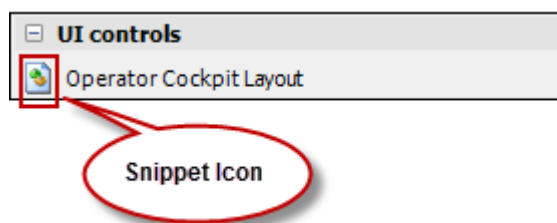

6. **IntelliPromptContext** – the Snippet location in the pop-up window that is displayed after using the Ctrl + Space keyboard shortcut (it has to be EditorIntelliPrompt usage defined)



There are six different contexts which may be set in the **IntelliPromptContext** section:

- ▷ None
- ▷ Default
- ▷ AttributeName
- ▷ AttributeValue
- ▷ ElementName
- ▷ All (contains Default, AttributeName, AttributeValue, and ElementName)

You may define more than one Context for one Snippet

Depending on the place of the cursor, the proper context menu will appear, for example:

```
A<Binput Ctype="Dtext"/>
```

- ▷ A – Default
- ▷ B – Element Name
- ▷ C – Attribute name
- ▷ D – Attribute value

7. **ScreenElements** – in this section the user is able to specify Screen Inputs/Outputs that will be added when the snippet is activated

- ▷ The <ScreenElements> section can contain any number of <ScreenInput> and <ScreenOutput> sections
- ▷ Each of those sections must contain:
 - ▷ **<Name>** section (the name of an Input/Output)
 - ▷ **<PortType>** section (the type of Input/Output; possible values: Char, Decimal, Boolean, Integer, DateTime)
 - ▷ **<PortPlurality>** section (possible values: Scalar, List)
- ▷ Moreover, each ScreenInput section can contain a **<DefaultValue>** section (which is the test value of an Input), and each ScreenOutput section can contain an **<AutoSubmit>** section (which specifies if the Output is auto submit)
- ▷ If a Screen Input/Output with the same name already exists, it will not be added