

Data Binding

Data Binding

Data binding is used to connect and automatically synchronize data between different data sources.

Data Binding Within the Same View

Data binding allows you to pass data between two different HTML Elements. To use data binding you need to wrap your variable name in double curly brackets `{{ }}` (two-way binding) or in double square brackets `[[ ]]` (one-way binding).

HTML Editor

CSSJavaScriptHTML

1<apr-web-component id="first" value="{{MyVariable}}"></apr-web-component>
2<apr-web-component id="second" value="{{MyVariable}}"></apr-web-component>

Actions: HTML Editor

HTML code

Runtime

Back to Designer

This is an example web component

Binding "value" property to an input:

This is an example web component

Binding "value" property to an input:

When you modify the value in one of the Web Components, the value in the other one will be updated accordingly.

Back to Designer

This is an example web component

Binding "value" property to an input:

This is an example web component

Binding "value" property to an input:

Data Binding in Screen Flows

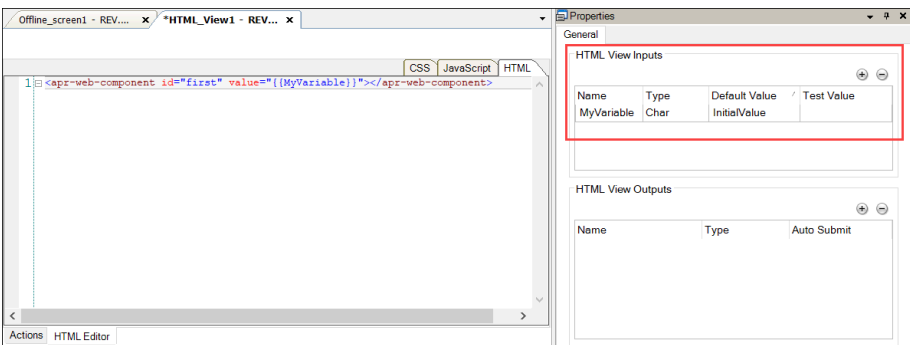
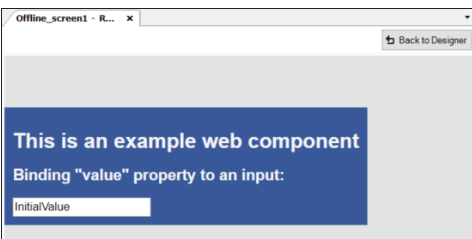
Data binding can also be used to pass data to Screen Flows.

Data Binding Initialized by the Input's Value

If you add an HTML View Input which has the same name as the Variable used in data binding, then data binding will be initialized by the HTML View Input's value.

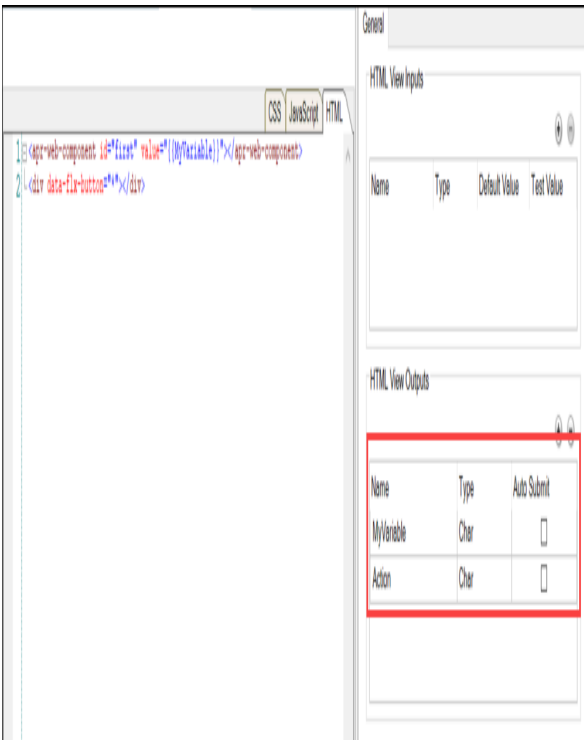
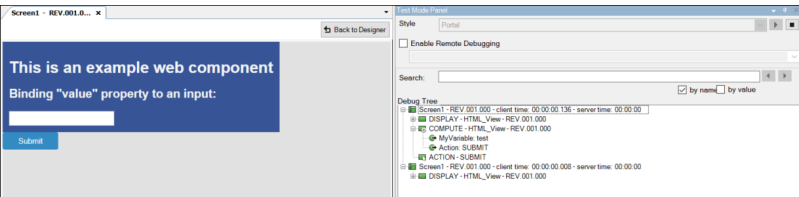
https://media.3ds.com/support/DELMIA-Apriso/2025/Online/ProcessBuilder/index.htm?_gl=1*109t8fz*_ga*MTk5OTg0NzQ3MS4xNzc3NjQ0NjA3*...

1/4

HTML Editor	Runtime
 HTML code	

Passing Data Back to Screen Flows

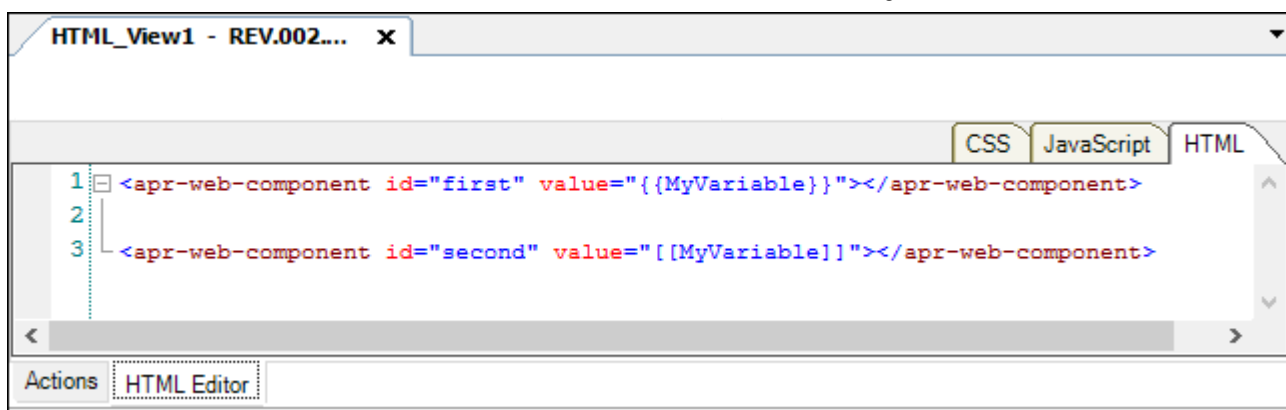
If you add an HTML View Output which has the same name as the Variable used in data binding, then the Variable's value will be passed to Screen Flows. To pass data to the Output, you need to use two-way binding. The current Variable's value will be taken upon submitting the Screen.

HTML Editor	Runtime
 HTML code	

Types of Data Binding

One-Way Data Binding

Double square brackets `[[ ]]` used in the code mean that it is one-way data binding and it supports only downward data flow.



HTML code

At runtime, when you modify the first Element, the second one will be updated accordingly. But if you modify the second Element, the first one will not change.

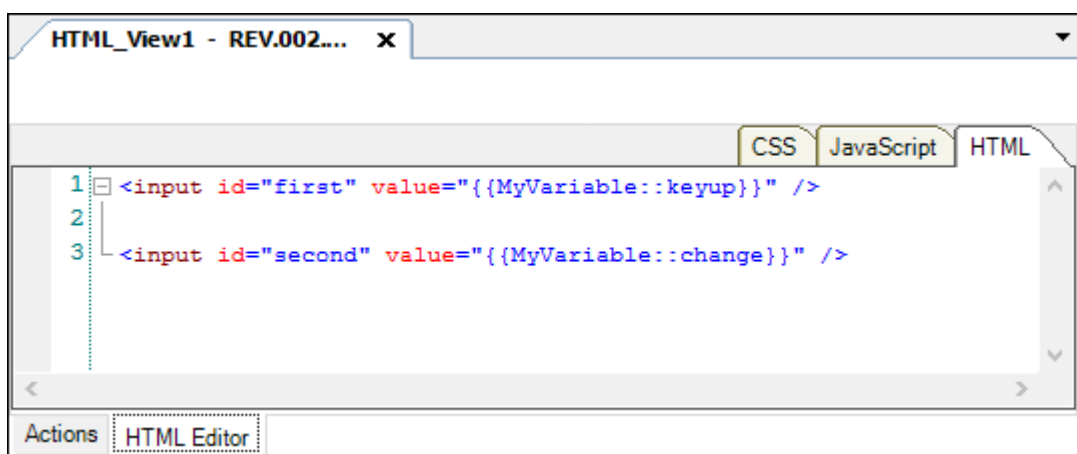
Two-Way Data Binding

Double curly brackets `{{ }}` used in the code mean that it is two-way data binding and it supports both upward and downward data flow.

Two-way data binding used to pass data between Web Components is described in [Data Binding Within the Same View](#) and in [Data Binding in Screen Flows](#).

Binding to Standard HTML Elements

Two-way data binding used to pass data between Standard HTML Elements involves the following syntax:



HTML code

To two-way bind to HTML Element you need to use a double colon `::` and specify an event name that binding is supposed to listen for. In the example above we use the "keyup" event in the first Element and the "change" event in the second one.

At runtime, when you modify the first Element, the second Element will be updated immediately, because the "keyup" event is triggered immediately at every key press. But when you modify the second Element, the first Element will be updated only after the "change" event which is triggered when losing focus.

Binding to an Array Element

To bind to an n-th array element, use the following syntax:

```
{{array.n}}
```

Binding to an Object Property

To bind to an object property, use the following syntax:

```
{{object.property}}
```

To learn more about data binding, refer to Polymer Library articles related to data binding.