

Define an Input-Output Routing


To Define a Routing Between a Function Input and Output

Use one of the following options:

- Use the drop-down list of previous Function Outputs of the matching type in the Function Input properties

The screenshot shows the 'Properties' window for a function input. The 'General' tab is selected. The 'Name' field contains 'Input1'. The 'Description' field is empty. Under the 'Data Type' section, 'Char' is selected in the dropdown, and the radio button for 'Char' is checked. Other radio buttons for 'Integer', 'Decimal', 'Boolean', 'DateTime', 'Complex', 'Scalar', 'List', 'List (Iterate)', and 'List (Duplicate)' are unchecked. The 'Use Source Value Copy' checkbox is checked. The 'Input Source' dropdown is set to 'Previous Function'. The 'Previous Function Output' dropdown is set to 'InputToOutput2.Value1', which is highlighted by a mouse cursor.

- Manually set the routing lines in the Function Navigation diagram

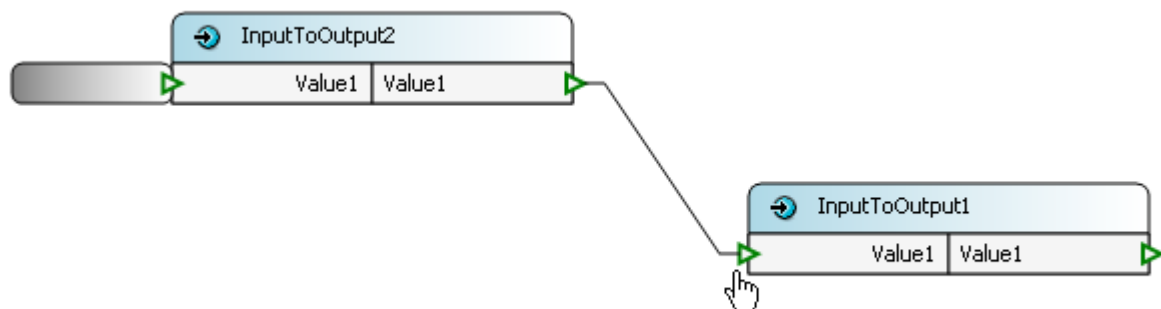

The system will report an error on validation if the data type of the previous Function Output is not convertible into the Input data type.

Drag-and-Drop Actions on Inputs

Source	Target	Action
Input	Function (in Entity Explorer) or place between Outputs in the same Step.	This DFC creates an Output in the target Function. It also links the Output to an Input.
Input	Function (in Entity Explorer) or place between Outputs in another Step.	This DFC creates an Output in the target Function. It also creates a Session Variable as an Output routing and sets the Session Variable as the Input source.
Input	Output in another Function in the same Step.	This DFC links an Output to an Input.
Input	Output of a Function in another Step.	This DFC creates a Session Variable as an Output routing and sets the Session Variable as the Input source.

Drag-and-Drop Actions on Outputs

Source	Target	Action
Output	Function (in the Entity Explorer) or place between Inputs in the same Step.	This DFC creates an Input in the target Function. It also links an Output to the Input.
Output	Function (in the Entity Explorer) or place between Inputs in another Step.	This DFC creates an Input in the target Function. It also creates a Session Variable as an Output routing and sets the Session Variable as the Input source.
Output	Input in another Function in the same Step.	This DFC links an Output to an Input.
Output	Input of a Function in another Step.	This DFC creates a Session Variable as an Output routing and sets the Session Variable as the Input source.