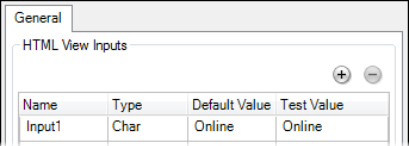
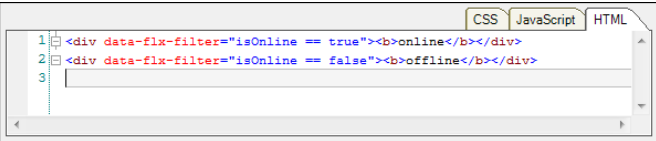


Filter

Filter can be used to toggle displaying the content of an HTML tag using a condition:

```
<htmltag data-flx-filter="[condition]">[content]</htmltag>
```

The condition can be written either in C# (for HTML Layout Editor) or JavaScript (for HTML View). The condition must return a boolean value.


Inputs	HTML Layout Editor/HTML Editor	Runtime
► DFC Function Navigation:  ► HTML View: 	 HTML code	online OK

The Filter converter cannot be used with the Complex data type.

Iterate with Filter

```
<htmltag data-flx-iterate="i,List" data-flx-filter="[condition]"></htmltag>
```

data-flx-filter limits the number of iterations based on the condition which could contain correct C# or JavaScript code returning a Boolean value, for example: "List[i]== X", "List[i] < X || List[i] > X", etc.

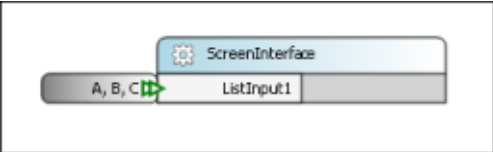Inputs	HTML Layout Editor/HTML Editor	Runtime
► DFC Function Navigation:  ► HTML View:	 HTML code	• B • C OK

Name	Type	Default Value	Test Value
ListInput1	List of Char	A B C	A B C

If a standard control is hidden by a filter attribute, it will be shown finally at the end. Controls can be surrounded by a filter attribute, but on the assumption that filtered elements will not include the control.