


Form View Type: Controls

Form Runtime

On the Forms Tab of the View workspace, it is possible to organize the display of a Form by defining groups and then assigning controls to these groups.

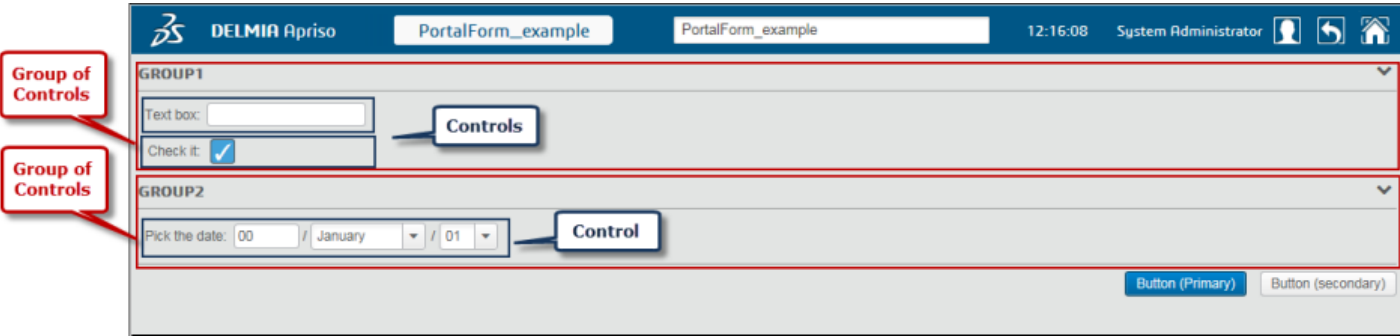

Properties of a Group of Controls

Enabled	Name	Show Title	State	Style	CSS Class
☒	Group	☒	Open		
☒	Group2	☒	Open		
☐	Group3	☒	Open		

Enabled	Code	Type	Data Type	Show Title	Required	Initial Value	Span Over
☒	Control	Label	Char	☒	☐		1

General

Name

GROUP

Title

Code:

Translation:

☒ Show Title

Position Order:

Column Count:

Focus:

State:

Style

CSS Classes:

Inline Style:

Field	Description
Name	The unique name of the section (group of controls).
Title	The descriptive name of the section (group of controls). ▶ Code – the name of the Dictionary Item of the title of the group of controls; the following actions are available: ▶ – adds the Dictionary Item (written in the text box) to the dictionary and links it to the title of the group of control ▶ – invokes the Dictionary Items suggestion lookup window, which lists the existing Dictionary Items from which the user may choose ▶ When the user enters a part of the Dictionary Item name, the system suggests a list of matching entries from the database

	▶ The chosen Dictionary Item is linked to the Group of controls title ▷  – unlinks the previously added Dictionary Item (it is removed from the Code field) ▷  – opens the Dictionary Translations screen in the context of linked Dictionary Items ▶ For more information on this screen, refer to the Dictionary Translations topic in the Dictionary Help ▶ Translation – the translation of the Group of controls title according to the translation added in the Dictionary Translations screen
Show Title	If selected, the title (label) of the group of controls will be displayed on the Screen.
Position Order	The number in the sequence of the groups of controls.
Column Count	The number of controls per row within the group. For example, there are three controls defined in the group, and when “Columns” is set to “2”, there will be two rows: two controls in the first row and one in the second row.
Focus	The control which will be focused when the Form is displayed.
State	The initial state of the section (the group of controls): ▶ Open – the group of controls is expanded ▶ Closed – the group of controls is collapsed ▶ Closed if no required control – the section will be closed unless there is at least one control that is required
Style	The style to be rendered on the UI element for the Action (usually used for changing the size, etc.) ▶ CSS Classes – apply additional CSS classes to the selected element ▶ Multiple class names must be separated with spaces ▶ Inline Style – apply additional CSS definitions to the selected element

Properties of a Control

General Tab

Open View DFC

Groups						
Enabled	Name	Show Title	State	Style	CSS Class	
☒	Group	☒	Open			
☒	Group2	☒	Open			
☐	Group3	☒	Open			

Controls						
Enabled	Code	Type	Data Type	Show Title	Required	Initial Value
☒	Control	Label	Char	☒	☐	1

Actions Forms

Properties

General Advanced

Code

check_box

☒ Show Title

Title

Code: +

Translation:

☐ Required

Position Order

Display Format

List of Values

System Parameter Name

Type

Check Box

Data Type

☐ Char ☐ Decimal ☐ DateTime

☐ Integer ☒ Boolean ☐ Complex

Initial Value

☐ False ☒ True

Default Value

☐ False ☒ True

Maximum Text Length

Span Over

Submit Action

Display Option

On Change

☒ DFC ☐ Action Script Function

Name

Revision

Field	Usage
Code	The unique control code. This name is also used as the Portal Session Variable (corresponding to an External Input or Output of the View). The Control's name cannot start with a number.
Show Title check box	The title (label) of the control which will be visible on the Screen.
Title	The descriptive control name. ▶ Code – the name of the Dictionary Item of the control's title; the following actions are available: ▶ – adds the Dictionary Item (written in the text box) to the dictionary and links it to the control's title ▶ – invokes the Dictionary Items suggestion lookup window, which lists the existing Dictionary Items from which the user may choose

01/05/2026, 13:54	Form View Type: Controls ▶ When the user enters a part of the Dictionary Item name, the system suggests a list of matching entries from the database ▶ The chosen Dictionary Item is linked to the control's title ▶  – unlinks the previously added Dictionary Item (it is removed from the Code field) ▶  – opens the Dictionary Translations screen in the context of the linked Dictionary Items ▶ For more information on this screen, refer to the Dictionary Translations topic in the Dictionary Help ▶ Translation – the translation of the control's title according to the translation added in the Dictionary Translations screen Do not include colons in the Control's title. The appearance of colons is controlled in the style (CSS).
Required check box	Adds a validation on the UI to force the user to fill the control. If Required is set to true and the entered value of this control equals Default Value or it is empty, then an error will be displayed in runtime after the submit. For example: ▶ Input Name: Quantity ▶ Initial = 10 ▶ Default = 0 Upon the first display of this configured example control in the Form on the Screen, the Initial Value of Quantity will be set to 10. When the user changes the value to 0 and submits, an error will be displayed that the value is required, because the provided value (0) for Quantity is equal to the Default Value (0). The same result will occur if the user leaves this control value empty.
Position Order	The position of the control on the Form in relation to other controls during runtime. This field is read-only, as the order of the controls must be changed by the up and down arrow buttons in the View Workspace: Forms Tab.
Display Format	The display format of the control's value. Only some control types are supported. Text Box and Label Controls You can control the format of the Text Box and Label controls. For example: {0:0.00} {UOMCode} can display the value: 1.25KG ▶ UOMCode – a Portal Session Variable ▶ 0:0.00 – a current control ▶ 0:0.00 – a display format For details, see <i>formatString</i> at Microsoft Docs. For the Text Box control with the Date Time data type you cannot use generic format strings. You can use the following format strings: date, time, datetime. They will display appropriate parts of the control value with appropriate pickers. Time Picker Control The default format is HH:MM:SS, which displays the hour, minute, and second Inputs

	In addition, for MM and SS, you can control the value step: ▶ MM10:SS5 will display the minutes in increments of 10 (0, 10, 20, 30, ...) ▶ and the seconds in increments of 5 (0, 5, 10, ...) ▶ If the step is not specified, step = 1 is assumed ▶ The 24H or AM/PM format for the hour Input is automatically set based on the user's settings (DELMIA Apriso Portal > Personalize) Date Picker always displays the year, month, and day inputs. The Display Format option controls if the year is four or two digits long: ▶ YYYY – sets the four digit format ▶ YY – empty sets the two digit format
List of Values	System ParameterName – it is possible to link a System Parameter (type: Static List or Dynamic SQL) to display its values to the control if it is of one of the following types: ▶ Text Box ▶ Drop-down List ▶ Radio Button ▶ State Button ▶ Label For more information on System Parameters, refer to the System Parameters Help.
Type	The type of control (e.g., Text Box, Password, Drop-down List, Check Box). Date Picker and Time Picker controls are intended to be used on Mobile devices. To use the Date Picker on the Desktop device, use Text Box control and set its Data Type to Date Time.
Data Type	The data type of the control.
Initial Value	The value that will be displayed in the control after entering the Screen. If a Session Variable of the control's name exists in the Portal Session, then its value will be applied instead of Initial Value.
Default Value	The value that will be used by the system in case an empty value has been entered. This works only if the control is not set as required.
Maximum Text Length	Used for a control of the Text Box, Password, and Text Area type. This controls the maximum length of the entry. If the Submit Action property is not set, after reaching the Maximum Text Length , the focus will be moved to the next control. If the Submit Action property is set, the View will submit with the given action. If On Change DFC is set, the On Change DFC will be called by AJAX.
Span Over	Controls how many columns the control should span. For example, if Span Over is set to 2, that means that this control will be spanned over two columns (the number of columns is set in the group properties). Target Quantity , UOM , and Production Line are spanned over one column (default). The Order Status is spanned over two columns.

Submit Action

The View Action that should be executed when the control is submitted. For example, submit OK when the Text Box length reaches the maximum value, or submit REFRESH when the Button is pressed.

Display Option

This setting is valid only for controls of the Label type. When the **Initial Value** setting is empty or the **Initial Value** is the same as the **Default Value** setting, you can use the following options:

- ▶ Empty on default – the label has the value "--"

- ▶ Hide on default – the label and its value are hidden

On Change

The On Change choice determines what will be called in the background (by AJAX) when the control value is changed. Typically used for validation purposes or for a fast scanning scenario for mobile devices.

The option is not available for the Label, Button (Primary), Button (Secondary), Date Picker and Time Picker type of control.

The following options are available to select:

- ▶ DFC
- ▶ [Action Script Function](#) – only default revisions of Action Scripts that are in the Active, Prototype or Development in Progress status can be linked (appear in the **Action Script Functions** lookup window)

Name – the Action handler DFC or Action Script Function

- ▶ The DFC used here should be of type [Change](#)


Revision – the revision of the View DFC

The following actions are available:

- ▶  – invokes the **DFCs** lookup window, where the user can copy and link an Action handler DFC
- ▶  – invokes the **DFCs** or **Action Script Functions** lookup window, where the user can link an Action handler DFC or Action Script Function
- ▶  – unlinks the linked DFC or Action Script Function
- ▶  – invokes the workspace of the linked DFC or **Action Script Manager**. If there is more than one revision of that DFC, a pop-up listing all of the revisions will appear (to open one of the revisions, double-click it).

In the case of PB Projects, the pop-up will display a default revision of the DFC (of the View type) in the current **Project**.

Advanced Tab

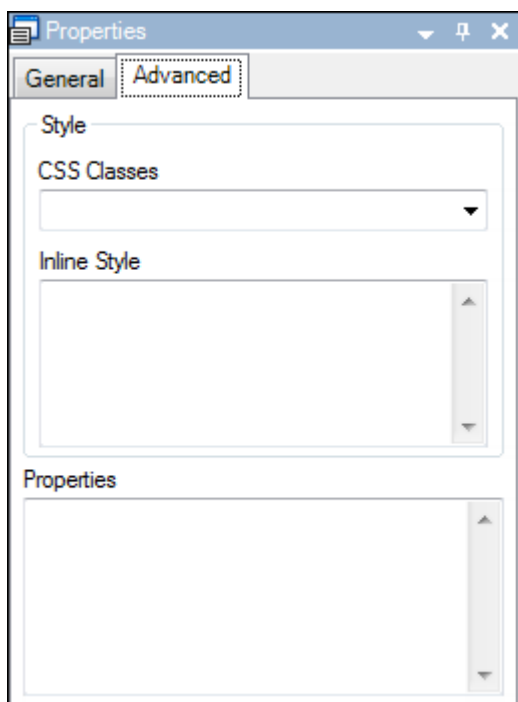

Field	Usage
Style	The inline style to be applied on the control: ▶ CSS Classes – apply additional CSS classes to the selected element ▶ Multiple class names must be separated with spaces ▶ Inline Style – apply additional CSS definitions to the selected element
Properties	Additional properties can be configured in this section using the JSON format.

Additional Configuration


On Change DFC

This is a DFC of the Change type that will be called after changing the state of the control, such as:

- ▶ Text Box – after value is changed
- ▶ Drop Down, Radio – after the selection change
- ▶ State Button, Check Box – after changing the option

Usage:

- ▶ In fast scanning scenarios
- ▶ For quick validation without a full page refresh

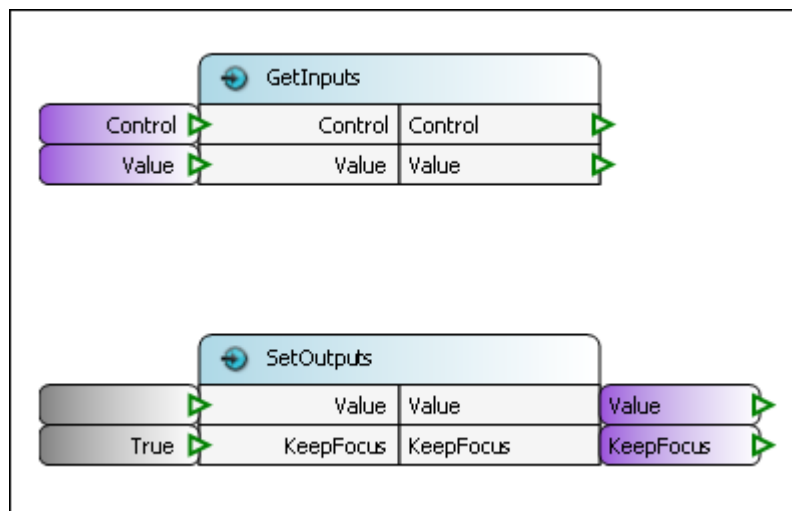

External Inputs:

- ▶ **Control** – the unique name of the control that triggered the change
- ▶ **Value** – the new value of the control

External Outputs

- ▶ **Value** – the value to be put back inside the control
- ▶ **KeepFocus** – if set to True, the focus will be kept on the control (otherwise, it will follow the [Autoadvance](#) settings)

Any **error** raised in this DFC will be displayed on the Portal screen in a standard way.

OnChange Action Script

Below is presented an example of a script that can be used to perform the OnChange functionality. It is required to use the same Inputs and Outputs as for [OnChange DFC](#) in this context,


```
//Define your namespace/module name eg: Warehouse, Maintanance, Quality
namespace YourNamespace {
    export class YourClassName extends ActionScript.Script {
        //Sample function that can be used on View Form Control On Change. Inputs and
        outputs are the same as for DFCs in that context
        public static YourFunctionForControlOnChange(Control: string, Value: string) :
        {
            Value: string,
            KeepFocus: boolean
        }
        {
            //logic for checking or validating values on control
            if (Control == 'ControlName' && Value == 'old value')
                return {
                    Value: 'new value',
                    KeepFocus: true
                };
            return {
                Value: Value,
                KeepFocus: true
            };
        }
    }
}
```


Injecting and Retrieving Variables Using Forms

It is possible to inject some variables into a Portal Form. This might be useful when the variable used is initialized in the same DFC in which the Form exists (when the variable is not yet a part of the Screen stack or when you want to overwrite it). To inject this variable into a Form, use the **InlineInputs** variable from the **GenericPortalForm** DFC. To transform the variable into the inline string, use the **EncodeParameters** Business Component.

It is also possible to retrieve a variable coming from a Form. This might be useful in an DFC in which the variable coming from the Form needs to be used to perform a validation (and is thus not yet part of the Screen stack). To do this, pass the **InlineOutputs** variable, which is coming from the **GenericPortalForm** DFC, into the **DecodeParameters** BC. Then add an Output to this BC with the same name as the Output from the Form.

Hiding Controls Dynamically


1. Add a control (of any Type):

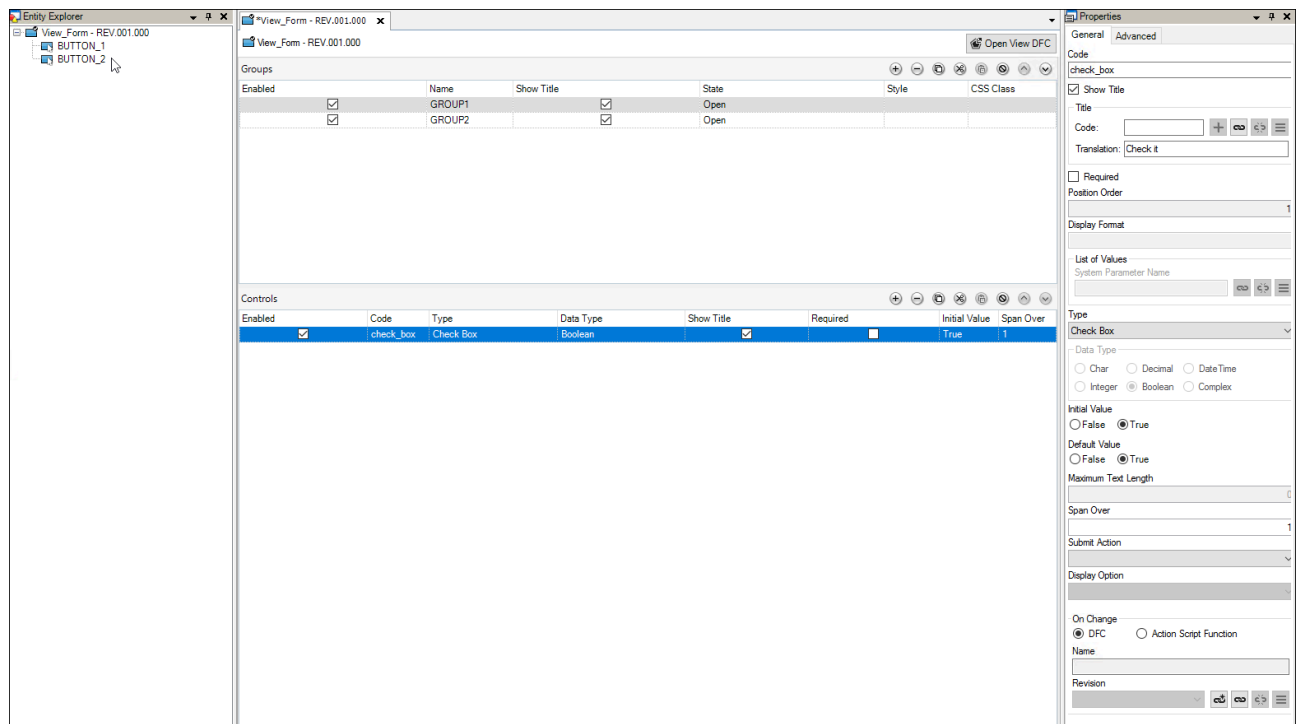

2. Duplicate the **GenericPortalForm** View DFC to a new entity (using **Copy & Link** from the **View DFC** property on the **View: General Tab**), set the name as identical to that of the View Form, and link it to the previously created View.


When you change the default revision of the **GenericPortalForm** View DFC, this revision will apply to all the Views that use this DFC on the server.

3. Open the duplicated View DFC and add **EncodeDynamicParameters** Business Component.
4. Configure the following:
 - a. Set the **OriginalEncodedParameters** Input (**EncodeDynamicParameters** BC) as an **InlineInputs** External Input
 - b. Add the **<control name>Hidden** Input (in our example below, this is the **check_boxHidden** Input), and set its type to Boolean with its value set to True (other Input Sources may be used).
 - c. Set the **InlineInputs** Input's (PortalGenerateForm View DFC) Input Source to Previous Function and the Previous Function Output to **EncodeDynamicParameters.EncodedParameters**.

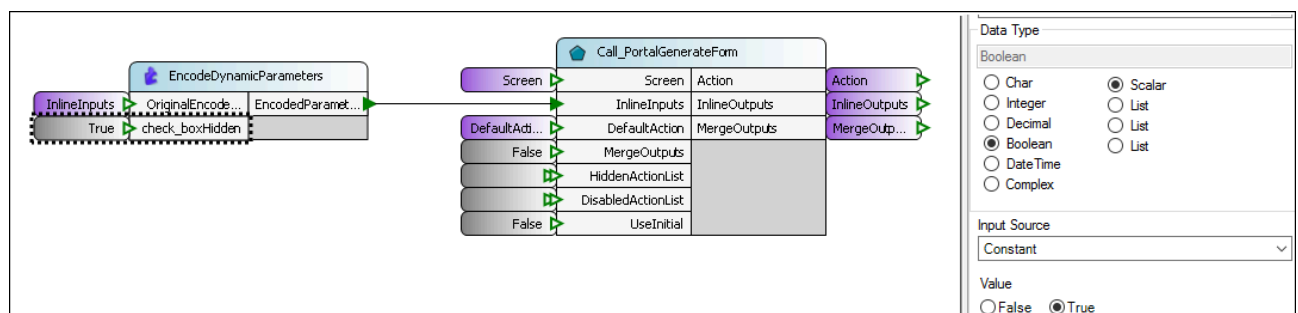

Read-Only Property

1. Add a control (of any Type):

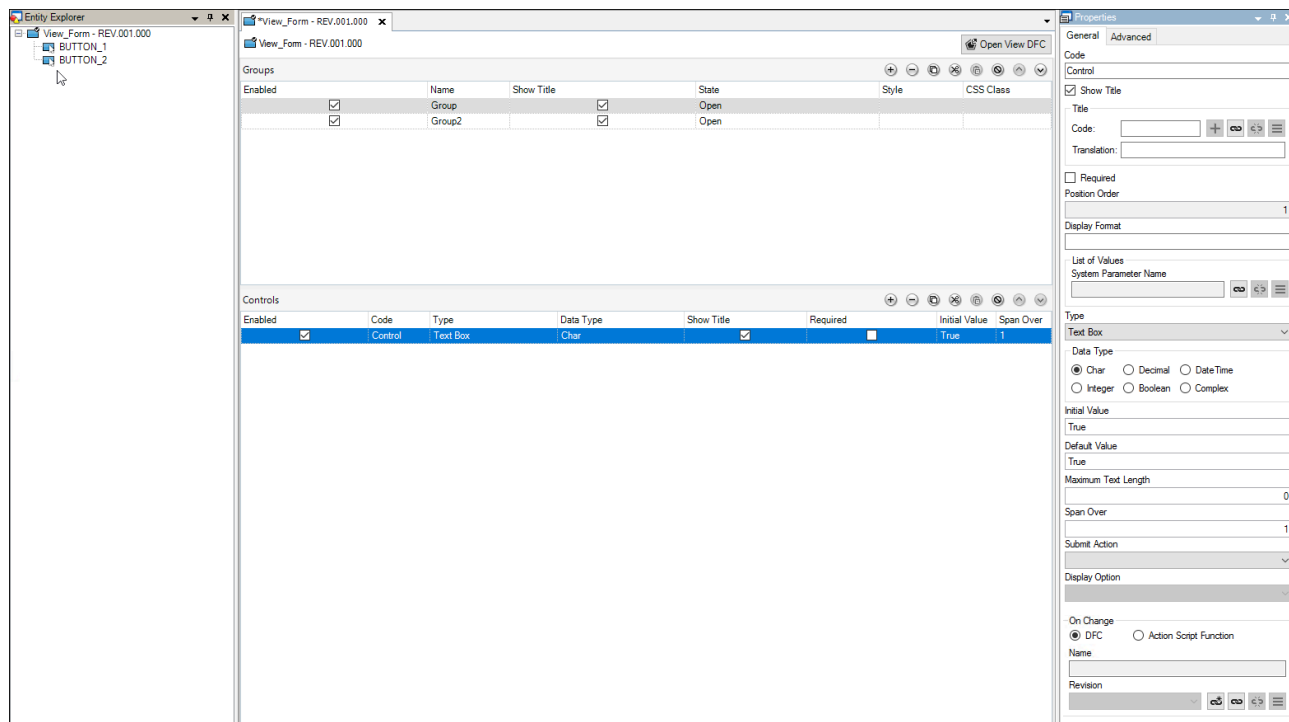

2. Duplicate the GenericPortalForm View DFC, set the name as identical to that of the View Form, and link it to the previously created View (use the **View DFC** property on the **View: General Tab**).
3. Open the duplicated View DFC and add **EncodeDynamicParameters** Business Component.
4. Configure the following:
 - a. Set the **OriginalEncodedParameters** Input (**EncodeDynamicParameters** BC) as an **InlineInputs** External Input
 - b. Add the **<control name>Readonly** Input (in our example below, this is the **text_exReadonly** Input), and set its type to Boolean with its value set to True (other Input Sources may be used).
 - c. Set the **InlineInputs** Input's (PortalGenerateForm View DFC) Input Source to Previous Function and the Previous Function Output to **EncodeDynamicParameters.EncodedParameters**

