


Linking Custom Documentation Content to a Screen

After enabling the Help button when configuring the [Header](#), custom documentation for the new Screens can be created and invoked when the Help button is pressed:

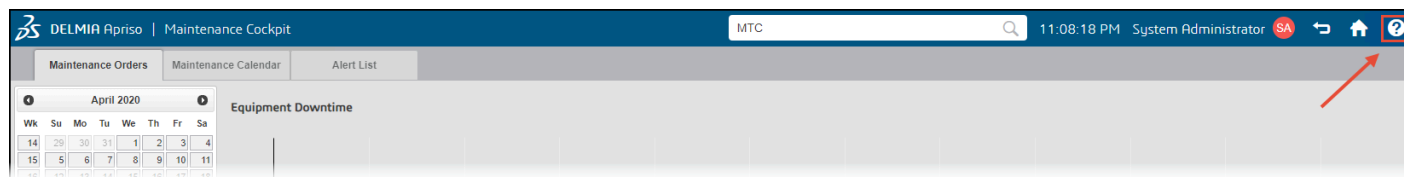

The Apriso Help Service uses the unique namespace of each Screen to find the relevant documentation topics that have been mapped to the Screens.

Documentation content can be mapped to the Help button by:

- ▶ Using a relative path
- ▶ Using a URL link

Mapping the Documentation Content to the Help Button

If a relative path is used, the documentation content is located in the following directory on the DELMIA Apriso server: <drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\Help\

In a default installation, all the documentation content is provided in the English language and is placed in the en-us folder. Any new content can be placed in this folder (the help mechanism will always fall back on the en-us folder) or a new folder (e.g., en-gb).

Once the documentation content is present on the server, perform the following actions:

1. Add an entry in the maps.xml file (this file should already exist in the directory specified above along with all of the Help content):
 - ▶ The maps.xml file contains information used by the DELMIA Apriso Help Service about the location of the map.xml for each Help
 - ▶ Each entry has the following structure:

Key	Value
<lang>	The language code identifier of the documentation content. It is a combination of the language code and locale code. Go to Languages M&M Screen to see the list of available language and locale codes.
<mapfile>	The path to the map.xml file, relative to the language folder, which maps the unique namespaces to the relevant documentation content.
<content>	The directory – relative to the language folder – where the documentation content referenced in the map.xml file is located.

- ▶ This is an example configuration:

```
<map>
  <entry>
    <lang>en-us</lang>
    <mapfile>Example_Help_Project/map.xml</mapfile>
    <content>Example_Help_Project/</content>
  </entry>
</map>
```

2. Create or edit an existing `map.xml` file (this file should be in the folder with your custom Help project files):

- ▷ The `map.xml` file contains information about which documentation content is relevant for the display in the context of a given namespace
- ▷ Each entry has the following structure:

Key	Value
<alias>	The namespace of the Screen for which the documentation content is to be displayed. The namespace for a Screen can be found by clicking the Help button (that is, clicking the Help button before any documentation file is linked). The namespace for a Screen is created in the following way: Apriso.<second part of revision name>.<Screen name> E.g., if a Screen is called MTC and has revision APR.MNC.000.001, the following namespace will be generated: Apriso.MNC.MTC If revision name has no "." character in it, the following namespace will be generated: Apriso.MTC It is recommended to use a consistent revision naming convention. Revision naming convention can be configured with use of the "RevisionNamingConventionMask" key located in the "ProcessBuilder" section of the Central Configuration file (for details, see Central Configuration Documentation).
<link>	The name of the documentation file to be displayed. It is assumed that the file is located in the same directory as the <code>map.xml</code> file. Any file type that can be displayed in the browser (e.g., HTML, PDF) can be used.

- ▷ This is an example configuration:

```
<map>
  <entry>
    <alias>Apriso.MNC</alias>
    <link>Main_Topic.htm</link>
  </entry>
</map>
<map>
  <entry>
    <alias>Apriso.MNC.MTC</alias>
    <link>Linking_Screens_to_Custom_to_Online_Help.htm</link>
  </entry>
</map>
```

The help mechanism has a fallback functionality which uses the namespace's structure. When a target namespace is not found in any of the map.xml files, the namespace is trimmed starting with the last "." character and the search is performed again. E.g., if the Apriso.MNC.QLT namespace is not found, the search mechanism looks for Apriso.MNC and then for Apriso.

3. Restart the DELMIA Apriso Help Service.

Using a URL Link to Map the Documentation Content to the Help Button

Documentation content can also be located on a different server. In such a case instead of setting a relative path, a URL link is used. The alias is obtained in the same way (that is, based on the Screen name and revision).

To create this type of mapping, go to the map.xml file and add an entry with the link to the documentation content. The link must begin with "http", for example:

```
<entry>
  <alias>Apriso</alias>
  <link>http://exampleaddress.com/documentation</link>
</entry>
```