

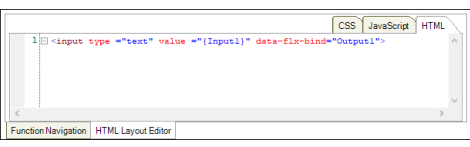



Screen Interface Outputs

It is possible to write a value from the Screen Interface Function Input into an Output.

```
<input type="text" value="{Input}" data-flx-bind="Output">
```


Writing a Value to an Output from a Screen Interface Input

Inputs/Outputs	HTML Layout Editor	Runtime	Debug Results
► DFC function navigation:  ► Screen Interface properties: 	 Code		

Supported HTML Input Types and Returned Values

Input Type	Scalar Output	Listed Output
Check box single	True/false	✗
Check box many	✗	List of true/false
Radio button single	✗	✗
Radio button many	Value	✗
Text Box single	Value	✗
Text Box many	✗	List of values
Select single	✗	✗
Select many	Index	✗
Multiselect single	✗	✗
Multiselect many	✗	List of true/false
TextArea	Value	✗
TextArea many	✗	List of values

If a value in the TextArea Input is not changed by the user, it will not be passed to an Output. In order to do this, you need to add an Input with a name "OutputDefault" (see the example below).

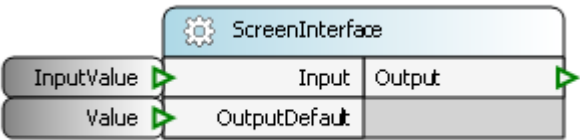

Writing Values from Many HTML Inputs to One Output with the Auto Submit Option

You can also save values from many Inputs to one Output. The Output may have the Auto Submit option selected. The page will submit when [Autoadvance](#) conditions are met for the control. Such behavior makes sense with the Hide OK Button check box selected.

Function Navigation	HTML Layout Editor	Runtime	Debug Results												
► DFC function navigation: ScreenInterface Output1 ► Screen Interface properties: Properties General Advanced Screen Interface Function Inputs <table><tr><th>Name</th><th>Type</th><th>Test Value</th></tr><tr><td></td><td></td><td></td></tr></table> Screen Interface Function Outputs <table><tr><th>Name</th><th>Type</th><th>Auto Submit</th></tr><tr><td>Output1</td><td>Char</td><td>☒</td></tr></table> Screen Literals Properties General Advanced ☒ Hide OK Button ☐ Hide Work Instruction Button ☐ Cache Results Invoke DFCs / AJAX Code Revision	Name	Type	Test Value				Name	Type	Auto Submit	Output1	Char	☒	CSS JavaScript HTML 1<input type = "button" name = "Yes" value = "" data-fik-bind="Output1"> 2<input type = "button" name = "No" value = "" data-fik-bind="Output1"> Function NavigationHTML Layout Editor Code	YesNo	DFC_test - REV.001.000 - 00:00:00 New Step 1 - 00:00:00 ScreenInterface - 00:00:00 Output1 Click "Yes" button DFC_test - REV.001.000 - 00:00:00 New Step 1 - 00:00:00 ScreenInterface - 00:00:00 Output1: Yes
Name	Type	Test Value													
Name	Type	Auto Submit													
Output1	Char	☒													

Code

```
1 <input type = "button" name = "Yes" value = "Yes" data-flx-bind="Output1">
2 <input type = "button" name = "No" value = "No" data-flx-bind="Output1">
```