


Session Variables

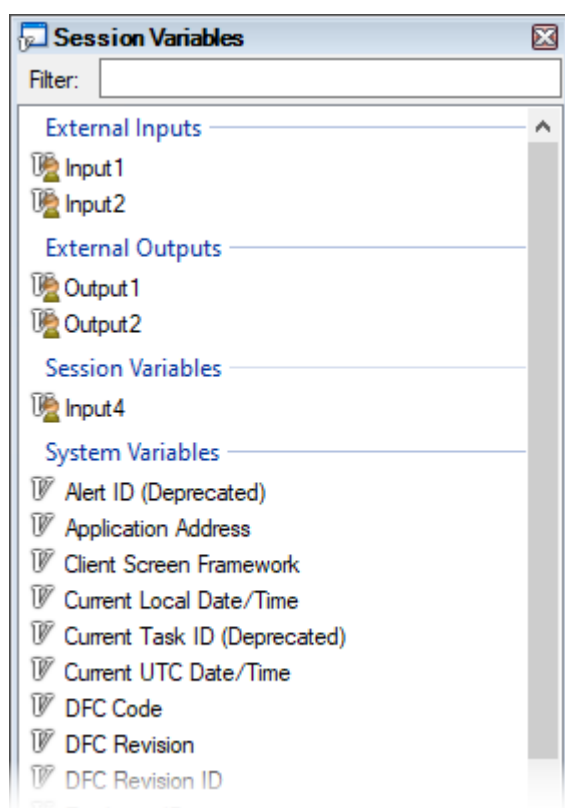

Field	Description
Filter	Enter a name of the system or session variable that you want to find.
External Inputs	All external inputs that are available within the open DFC (see the inputs section on the DFC Interface tab).
External Outputs	All external outputs that are available within the open DFC.
Session Variables	All the session variables that are defined by the process author and available within the open DFC (see the outputs section on the DFC Interface tab).
System Variables	This list contains all the variables that are defined in the system (see the list in Input Source: Session Variable).

Basic Rules

- ▶ When dragging a system or session variable between inputs, the input and output are created based on the data type of the selected variable.
- ▶ Validation returns an error when the input data type is not compatible with the data type of the system variable.
- ▶ The default session variable name is based on the function output name. If the output name is the same as one of the system variables, the system renames the newly created session variable by adding and incrementing a number at the end of the name (*SessionVariable_1*, *SessionVariable_2*).

Actions Available on Variables

- ▶ You can drag multiple function outputs from **Entity Explorer** or function navigation workspace into the Session Variables tool pane to automatically create a session routing and a new session variable.

You can drag a session variable from the tool pane to the:

- ▶ Function's input or output – the system adds the input or output source with the selected variable.
- ▶ Function, between inputs – the system creates a new input (with source set to the selected variable) and output. You can select more than one variable.
- ▶ Function, between outputs – the system creates a new output (with source set to the selected variable) and input. You can select more than one variable.

You can drag a system variable from the tool pane to the:

- ▶ Function's input – the system adds the input source with the selected variable.

- ▶ Function, between inputs – the system creates a new input (with source set to the selected variable) and output. You can select more than one variable.

Dragging external inputs and outputs works in the same way.

You can drag a session variable from the Session Variables tool pane to the function either in Entity Explorer or the function navigation workspace.

After selecting one or more external inputs, external outputs, system variables, or session variables in the Session Variables tool pane, Entity Explorer highlights the function inputs or outputs that use the selected variables (parent entities are highlighted to facilitate navigating to specific function inputs or outputs):

