



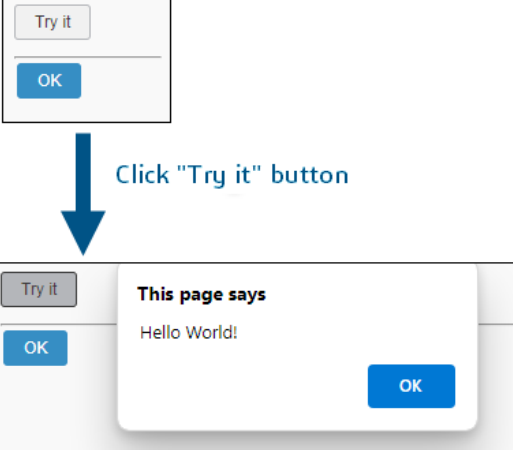
Simple Plain JavaScript

The topic lists the following examples of usage:


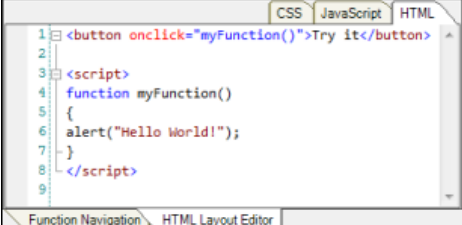
- ▶ Simple JavaScript in HTML Code
- ▶ Simple JavaScript in the <script> Tag
- ▶ JavaScript in the JavaScript Tab
- ▶ Including External File with the JavaScript Function
- ▶ jQuery Usage

Do not use the "\$" character as a stand-alone variable (e.g., `var $ = "foo";`) as it will come into conflict with the jQuery library.

Simple JavaScript in HTML Code (HTML Tab)

Function Navigation	HTML Layout Editor	Runtime
	 HTML Layout Editor Code	 Click "Try it" button

Simple JavaScript in the <script> Tag (HTML Tab)

Function Navigation	HTML Layout Editor	Runtime
	 HTML Layout Editor Code	 Click "Try it" button

JavaScript in the JavaScript Tab

Function Navigation

ScreenInterface

HTML Tab

CSSJavaScriptHTML

1<button onclick="myFunction()">Try it</button>

Function NavigationHTML Layout Editor

HTML Layout Editor Code

JavaScript Tab

CSSJavaScriptHTML

function myFunction() { alert("Hello World!"); }

Function NavigationHTML Layout Editor

HTML Layout Editor Code

Runtime

Try it

OK

Click "Try it" button

Try it

OK

This page says

Hello World!

OK

Including an External File with the JavaScript Function

When linking an external file, you can use one of the two placeholders in the `src` attribute (see [Placeholders](#) to learn more):

- ▶ [AprisoScripts] (e.g, `<script src="[AprisoScripts]/myscript.js"></script>`), which will be changed to `<drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\Portal\Scripts`
- ▶ [Apriso] (e.g, `<script src="[Apriso]/myscript.js"></script>`), which will be changed to `<drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\Portal`

Function Navigation

ScreenInterface

HTML Tab

CSSJavaScriptHTML

1<button onclick="myFunction()">Try it</button>

Function NavigationHTML Layout Editor

HTML Layout Editor Code

JavaScript Tab

Runtime

Try it

OK

Click "Try it" button

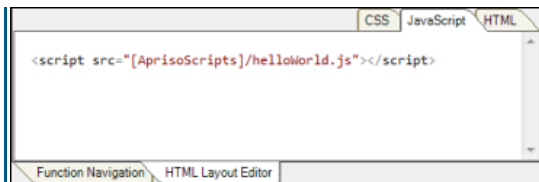
Try it

OK

This page says

Hello World!

OK



HTML Layout Editor Code

jQuery Usage

Function Navigation	HTML Layout Editor	Runtime
	HTML Tab <pre> 1 <input type="text" class="somevalueA" value="{initialvalueA}" /> 2 <input type="text" class="somevalueB" value="{initialvalueB}" /> 3 <input type="text" class="totalvalue" /> 4 5 <input type="button" value="Total Value" onclick="totalvalue(parseInt(\$('.somevalueA').val()), parseInt(\$('.somevalueB').val()))" /> </pre> HTML Layout Editor Code JavaScript Tab <pre> function totalvalue(A,B) { \$(".totalvalue").val(A+B); } </pre> HTML Layout Editor Code	