

Styling

In the HTML tab, CSS styles are applied for each instance of a DFC.

In the CSS tab, CSS styles are applied only once per all instances of the same DFC.

CSS Styles

It is recommended to use the already defined CSS classes. The CSS Framework is supported in the client mode. For details, see the [CSS Framework Documentation](#) .

Font Icons

You can use 3DS and Font Awesome icons in the HTML tab. For more information, see [How to Use Font Icons](#).

Including CSS Styles from an External File

```
<link rel="stylesheet" type="text/css" href="[AprisoStyles]/mystyle.css">
```

In runtime, the [AprisoStyles] placeholder is replaced by a specific path. By default, the path looks like this: <drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\Portal\Styles\Default. You can also use the [Apriso] placeholder, which corresponds to the following path: <drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\Portal.

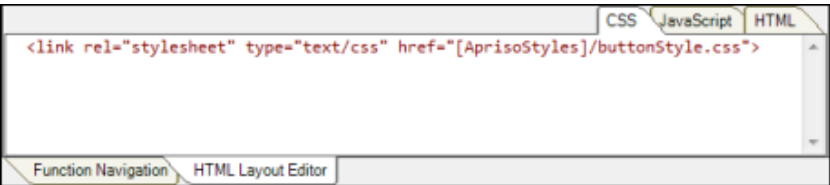
To learn more about placeholders available in the HTML Layout editor, see [Placeholders](#).

If you have a style that you want to reuse in many different DFCs, you should copy it to a file and link it in the CSS tab, or create a Sub-DFC which will be linked on all of the screens.

Files linked to the CSS tab will be added as dependencies to the DFC in the GPM package.


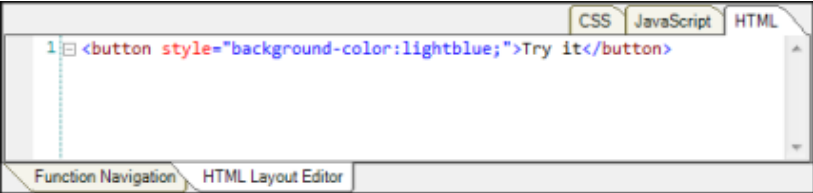

Function Navigation	HTML Layout Editor	Runtime
ScreenInterface	HTML Tab CSSJavaScriptHTML 1<button class="buttonColor">Try it</button> Function NavigationHTML Layout Editor HTML Layout Editor Code	Try it OK

CSS Tab


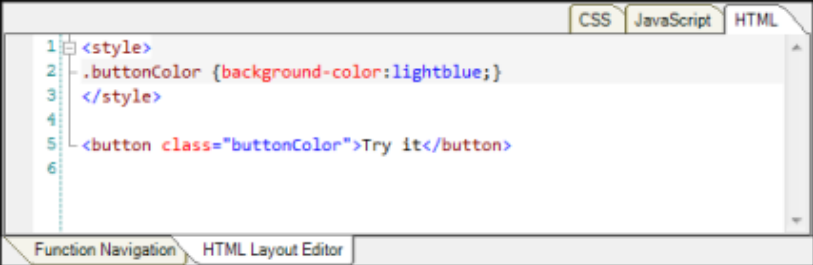



HTML Layout Editor Code

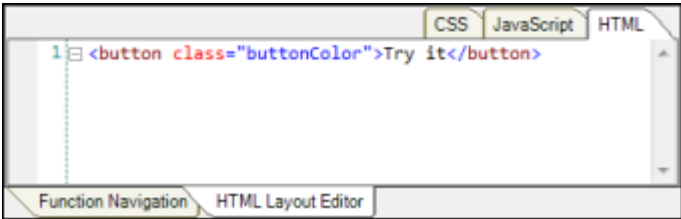

Defining the CSS Style in the HTML Tag

Function Navigation	HTML Layout Editor	Runtime
	 <pre>1 <button style="background-color:lightblue;">Try it</button></pre>	
	HTML Layout Editor Code	

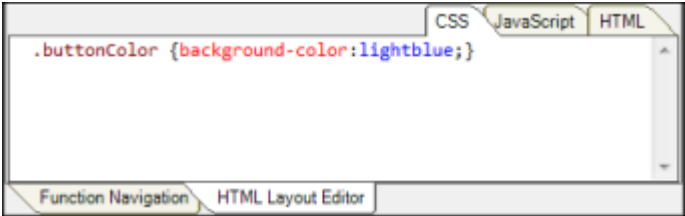
Defining the CSS Class in the HTML Tab

Function Navigation	HTML Layout Editor	Runtime
	 <pre>1 <style> 2 .buttonColor {background-color:lightblue;} 3 </style> 4 5 <button class="buttonColor">Try it</button> 6</pre>	
	HTML Layout Editor Code	

Defining the CSS Classes in the CSS Tab

Function Navigation	HTML Layout Editor	Runtime
	HTML Tab  <pre>1 <button class="buttonColor">Try it</button></pre>	
	HTML Layout Editor Code	

CSS Tab



HTML Layout Editor Code