



View Templates

Using predefined Templates for Views and linked DFCs is recommended (see details on [Copying and Linking Views to Screen Panels](#)). You can find the Templates with the use of Entity Manager (use the following filter: **Revision:APR.TPL**, **Type: View**).

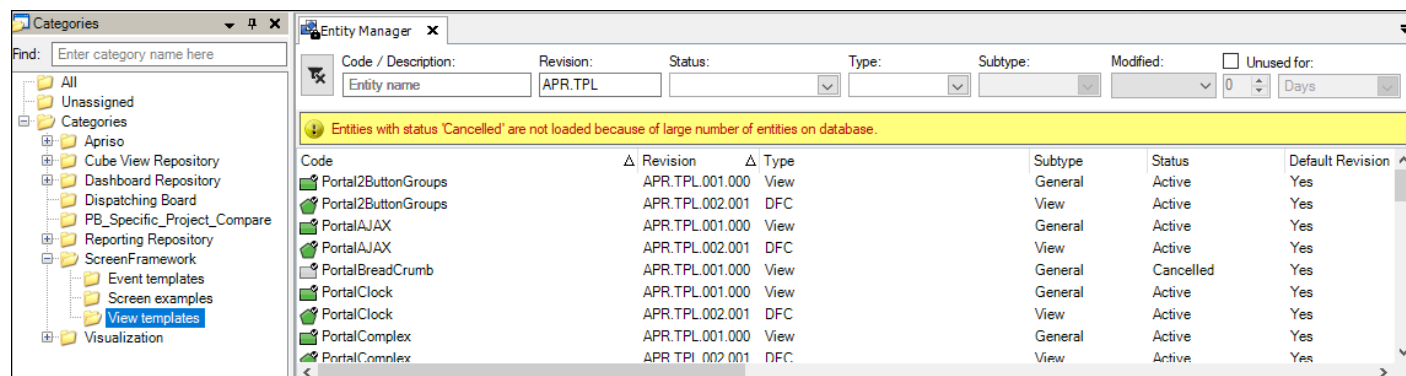

The following Templates are delivered with the product:

Template	Usage
Portal2ButtonGroups	A View that supports grouping buttons (two groups).
PortalAJAX	A View that supports AJAX refresh.
PortalClock	A View that shows an example of a client-side clock.
PortalComplex	A View that supports implementing more complex logic with three Steps in the DFC (Initialize, Display, Finalize).
PortalEmployeeAuth	A View that displays employee authorization.
PortalForm	A View that supports Forms (e.g., text box, radio button, check box).
PortalGrid	A View to display a single grid (the Grid control is used).
PortalHeader	A View to display a standard Header with both predefined and custom Buttons.
PortalMessage	A View for mobile devices that displays a message.
PortalMobileSimple	A simple View for mobile devices.
PortalMobileYesNoMessage	A View that displays a message with YES and NO Buttons.
PortalPaging	A paging Template for mobile devices.
PortalSimple	A View that supports implementing simple logic with one Step in the DFC.
PortalTab	A View to display Tabs. General Links Documents Attachments Tasks Comments
PortalTabNotification	A View to display Tabs with notifications.
PortalTree	A View to display a single tree (the Tree control is used).
PortalVisualization	A View to display a chart or gauge (the Visualization control is used).

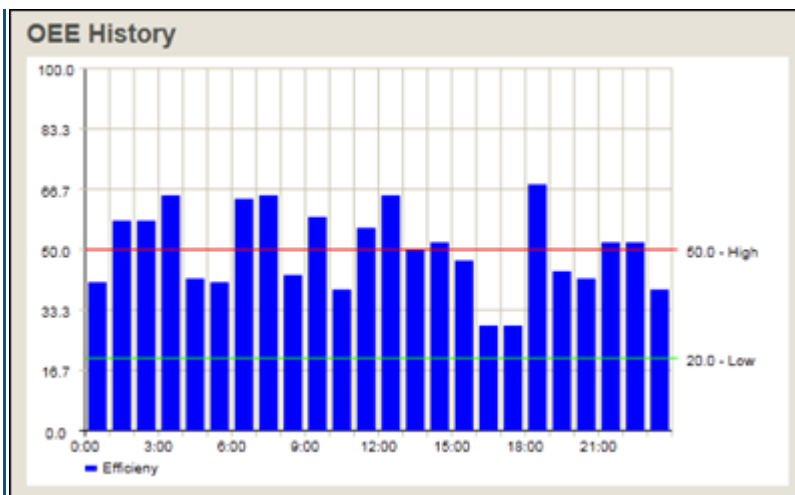

Usage examples of the main Template Views are listed above. To see them, use the following filter in Entity Manager: **Revision:** *APR.EXA*, **Type:** *Screen*.

Categories

Find:

All

Unassigned

Categories

Apriso

Screen Flows

Event templates

Screen examples

View templates

Visualization

Entity Manager

Code / Description:

Revision:

Status:

Code	Revision	Type
 Portal2ButtonGroups_example	APR.EXA.001.000	Screen
 PortalAJAX_example	APR.EXA.001.000	Screen
 PortalClock_example	APR.EXA.001.000	Screen
 PortalForm_example	APR.EXA.001.000	Screen
 PortalGrid_example	APR.EXA.001.000	Screen
 PortalSimple_example	APR.EXA.001.000	Screen
 PortalTab_example	APR.EXA.001.000	Screen
 PortalTabNotification_example	APR.EXA.001.000	Screen
 PortalTree_example	APR.EXA.001.000	Screen
 PortalVisualization_example	APR.EXA.001.000	Screen

Additional configuration information is included inside the [Rich Text Description](#) of each Template and its usage example.

A View can always be changed, even if you started from a Template that does not handle a particular functionality. For example, a View created from PortalTemplate_View can be easily adjusted to support AJAX refresh. In such cases, just compare the Templates to see the differences.

AJAX View Template


The AJAX View Template should be used in the [server mode](#). It is not needed to use this template in the [client mode](#).

The AJAX functionality allows for refreshing the Views asynchronously without page postback via AJAX.

Functional Overview

An AJAX View consists of a View and an DFC of the View type that should have the same name as the View.

Only pure HTML or snippets can be used with AJAX (Business Controls and Forms will not work).

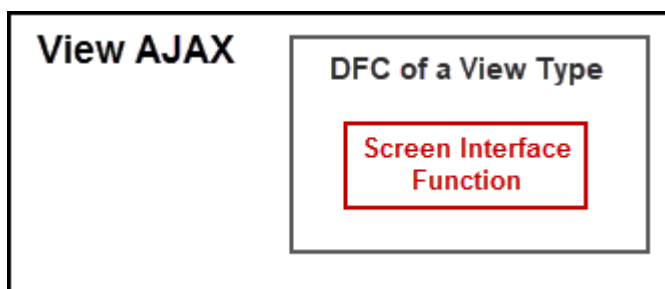


Configuration

1. Use the PortalAJAX View template (for details, see [View Templates](#)).
2. After copying and linking it, set its **Refresh Interval Time** [Screen Panel Definition](#) property.

Usage Example

The following example presents how the AJAX View Template works. To study the example, run the **PortalAJAX_example** Screen.

When the entire Screen is displayed, an AJAX View Template is rendered on the Screen in the same way as a regular (non-AJAX) View. Upon a refresh request, the View DFC is called again but this time in the AJAX mode. In this case, the View DFC returns HTML text as the External Output (and it does not render the UI). The HTML code then replaces the original content of a given tag within the Screen.

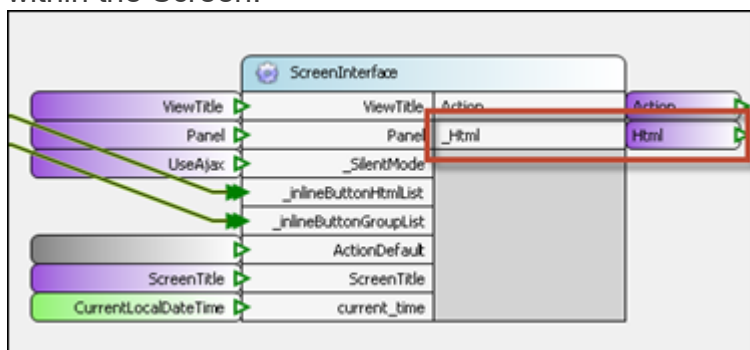

The data-portal-id attribute of the HTML tag enables control over the elements from the View which should be replaced. The content of this tag will be replaced on every AJAX refresh.

```

<div data-portal-id="{Panel}_1">
  <!-- Put your AJAX content below -->
  <p>Current date and time:</p>
  {current_time}
  <!-- Put your AJAX content above -->
</div>
  
```

The data-portal-id attribute should be set to a unique value within the View. The examples below illustrate the HTML code of the View (the **green elements** will be replaced on a Screen refresh):

- **Example 1:** refreshing the Quantity and Status fields (but not the OrderNo)

```
<p>Order number: {OrderNo}</p>
<div data-portal-id="OrderQuantity">
  <p>Order Quantity: {Quantity}</p>
  <p>Order Status: {Status}</p>
</div>
```

► **Example 2:** refreshing the inner-HTML of the buttons

```
<button data-flx-iterate="{i_list}" data-portal-id="Button{i}" value="{List[i]}" data-
flx-bind="Action">
  {ButtonTitleList[i]}
</button>
```