


Web Service Function

SOAP Web Services are deprecated.

This Function invokes a remote Web Service using one of the two available standards:

- ▶ SOAP
- ▶ HTTP


You can switch between SOAP and HTTP services using the **Web Service Type** drop-down menu.

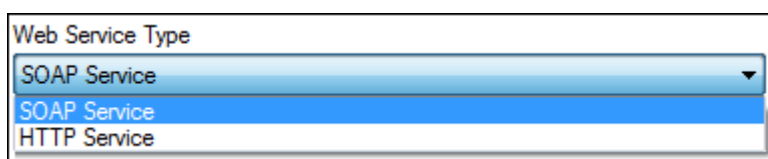

To Add the Web Service Function

Drag the Web Service Function from the [Toolbox](#) to the Function Navigation diagram, or double-click the Web Service icon in the Toolbox. The system will automatically add the required Inputs based on Web Service Type.

SOAP Service

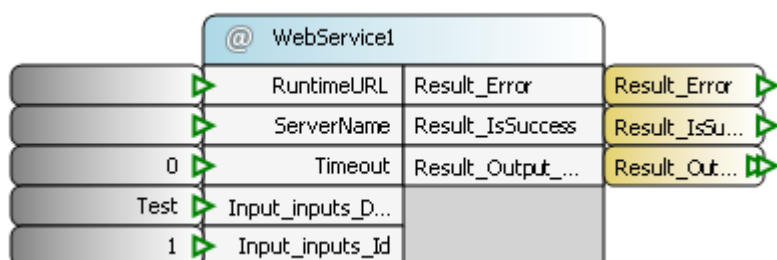

Properties

General

Name
WebService1

Description

Type
Web Service

☐ Log Events

Web Service Type
SOAP Service

SOAP Service

WSDL URL
http://.../Apriso/WebServices/Public/GetEmployee.svc?wsdl

URL
http://.../Apriso/WebServices/Public/GetEmployee.svc

Test Load/Refresh

Service Name
WSHttpBinding_GetEmployee

Method Name
Invoke

Authentication Type
Anonymous Access

Inputs and Outputs

Name	Type
Inputs	
☒ Input_inputs_Id	Char
Outputs	
☒ Result_Error	Char
☒ Result_IsSuccess	Boolean
☒ Result_Output_Name	ListOfChar

Unsupported methods

Name

Field	Description
Web Service Type	The type of Web Service to be used: SOAP or HTTP.
WSDL URL	The URL of the WSDL definition of Web Service.
URL	The URL of the remote Web Service.

	The default URL is set based on the provided WSDL. In some cases, the server name in URL and the WSDL URL are different (for example, in a cluster environment) and need to be changed. In such a case, the URL can be changed in two ways: by changing only the server name using the <code>ServerName</code> Input, or by changing the whole URL using the <code>RuntimeURL</code> Input.
Test button	Performs a test execution of Web Service. If you modified the linked DFC, compile it before running the web service test.
Load/Refresh button	Reads the WSDL definition of the web service containing the list of services, methods, and their inputs and outputs.
Service Name	Name of the remote service which will be invoked.
Method Name	Name of the method which will be invoked.
Authentication Type	There are three types of Authentication to choose from: ▶ Anonymous Access – no authentication ▶ Basic Authentication – HTTP basic authentication (Inputs: Username and Password are added to the Function and used to access the web service) ▶ NTLM Authentication – the authentication protocol used in Microsoft Windows networks
Inputs and Outputs	The list of Inputs and Outputs used to invoke remote web service.
Unsupported methods	The list of methods whose parameters have complex types (not supported by Process Builder).

To invoke DFC on web service (e.g. for testing purposes), the proxy definition cached using "WebServiceProxyCacheExpirationSpan" is needed. That is why changes in web service interface may not be visible immediately. For details, refer to the "Framework" section of the [Central Configuration Documentation](#).

Inputs

Inputs	Description
RuntimeURL	The URL (endpoint) used to call the web service in runtime. If specified, it overrides the URL from WSDL definition.
ServerName	The server name which is used to call web service. If specified, it overrides the host name part of the URL from WSDL definition.
Timeout	The connection timeout for calling the web service in runtime. The value zero means using a default timeout value (one minute).
Username	The name of the user which is used for authentication.
Password	The password that is used for authentication.

The default number of characters which could be sent as WebService Input or Output equals 8192. When calling a DFC that uses text longer than 8192 characters as Input or Output, make sure the below flags are set to the necessary values:

WebServiceMaxStringLength setting in CentralConfiguration.xml file (for details, see "Framework" section of the [Central Configuration Documentation](#)).

<readerQuotas maxStringLength="..." /> setting in <drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\WebServices\Web.config


<readerQuotas maxStringLength="..." /> setting in <drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\WebSite\WebServices\Public\web.config

HTTP Service

For detailed information on how to configure HTTP Web Services, see the **Web APIs Guide**.

If a Web Service Function of the HTTP type is included in a GPM Package, the WebServiceProviders.xml file (<drive>\Program Files\Dassault Systemes\DELMIA Apriso 2025\Website\CentralConfigurationWebServiceProviders.xml) will also be included in the package as a dependency. Deploying the package on a destination server will overwrite the local definition of a provider with the same name as the one used by the web service function (if any). For example, if the function uses a service provider with the name of "apriso", it will overwrite the "apriso" provider defined in WebServiceProviders.xml on the destination server (for more information on package deployments, see [Global Process Manager Help](#)).

External client certificates are supported. For information on how to enable external certificates refer to [Configuration Manager Help](#).

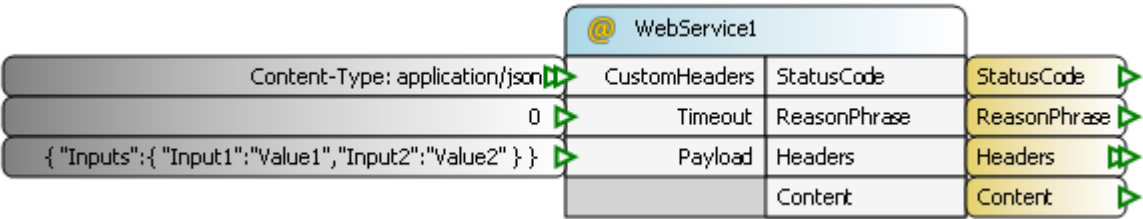

Properties

General

Name

WebService1

Description

Type

Web Service

☐ Log Events

Web Service Type

HTTP Service

HTTP Service

URL

http://[redacted]/Apriso/httpServices/operations/GetEmployee1

Http request method

GET

Protection type

Public

Service provider

Field	Description
Web Service Type	The type of web service to be used: SOAP or HTTP .
URL	The URL (endpoint) of the web service.
HTTP request method	One of the supported HTTP methods: GET , POST , PUT , or DELETE . If Protection type is set to 3DPassport , only the GET method is available.
Protection type	The web service's protection level: Public , OAuth2.0 Token , API Key , or 3DPassport .
Service provider	The entity providing (hosting) the web service. The provider must be defined in <code>WebServiceProviders.xml</code> (see the Adding a Web Service Provider section in the <i>Web APIs Guide</i>).

Inputs

Inputs	Description
CustomHeaders	A list of char representing any additional headers to be used when making the request to the web service. The Accept header is set to <code>application/json</code> by default.
Timeout	The connection timeout for calling the web service in runtime. Zero means using the default value (100 seconds).
Payload	The body of the request (e.g. <code>{ "Inputs" : { "Input1" : "Value1", "Input2" : "Value2" } }</code>). This Input is only available if the HTTP request method is set to

POST or PUT.

- ▶ If the payload is **JSON**, "Content-Type: application/json" must be added to **CustomHeaders**
- ▶ If the payload is **XML**, "Content-Type: application/xml" must be added to **CustomHeaders**

The data type of the Payload Input can be changed to Complex/List of Complex if "Content-Type: application/json" is added to **CustomHeaders**.

To learn what inputs a particular web service expects, make a GET request to that web service. In response, you will receive a JSON document (if the Accept header is set to application/json, as it is by default) or an XML document (Accept: application/xml) containing sample execution parameters which you can use in the body of your POST or PUT request.


Additional Parameters

You can use Inputs to specify additional parameters. They will replace any placeholders used in the URL.

All placeholders in the URL should use the following format: **\${parameterName}**, and are subject to the same limitations that apply to Function Input names. See [Input Properties](#) for details.

URL

http://.dsone.3ds.com/Apriso/HttpServices/\${x}

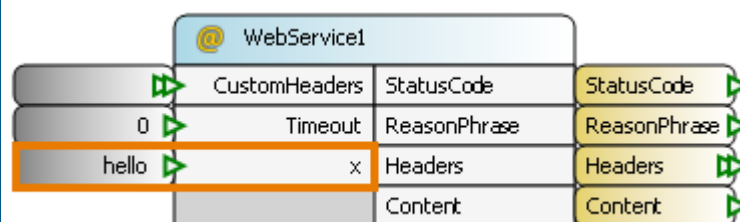

Outputs

Outputs	Description
StatusCode	The HTTP status code returned by the web service (e.g. 200 OK).
ReasonPhrase	A short textual description of the Status Code (e.g. 200 OK).
Headers	The headers of the response.
Content	The body of the response. The data type of the Output can be changed to Complex/List of Complex if "Accept: application/json" is added to CustomHeaders.