


## NodeJS Task Instructions

Methods	URLs	Actions
GET	/students	Retrieve all students
GET	/students/6	Retrieve student with id = 6
POST	/students	Create new student
PUT	/students/6	Update student with id = 6
DELETE	/students/6	Delete student with id = 6
DELETE	/students	Delete all students

There exists already 4 students with the ids 5, 6, 7 and 8.

When making POST and PUT requests use JSON raw format data as input as shown below

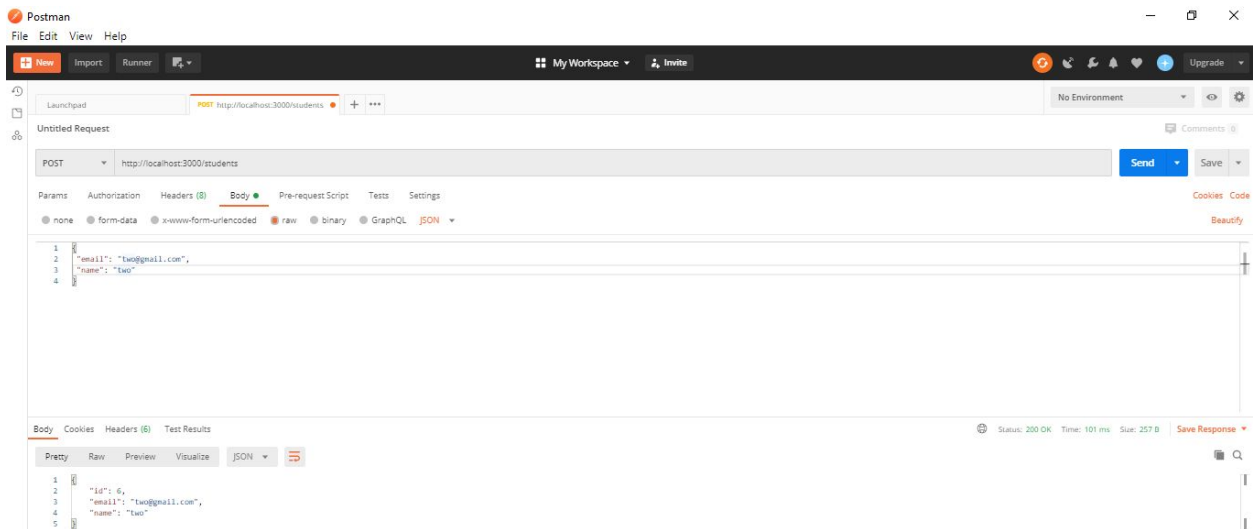

PUT and DELETE requests are made with the id on the URL as shown

Postman

File Edit View Help

New Import Runner My Workspace Invite

Launched PUT http://localhost:3000/students/6 No Environment

Untitled Request

PUT http://localhost:3000/students/6 Send Save

Params Authorization Headers (0) Body Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary GraphQL JSON

```
1 {
2   "email": "twotpdated@gmail.com",
3   "name": "twotpdated"
4 }
```

Body Cookies Headers (0) Test Results

Pretty Raw Preview Visualize JSON

```
1 {
2   "id": "6",
3   "email": "twotpdated@gmail.com",
4   "name": "twotpdated"
5 }
```

Status: 200 OK Time: 2.60 s Size: 273 B Save Response