

Project Documentation

Summary

The main contributions are based on sets of experiments structured in 3 sections. The synthetic data (section 3 and 4) experiments are intended to (1) highlight specific problems often reported to occur in cluster analysis and how topological manifold learning can solve these and (2) to show the subtleties of applying manifold learning as a tool to infer topological data structures. The real data experiments (section 4) are intend to substantiate the findings based on synthetic data on real world problems. Additional results are reported in the appendices 1 - 3.

Important Note

Some data files are too large to be uploaded to GitHub and need to be downloaded from <https://syncandshare.lrz.de/getlink/fiSaZPAV3jzvGjAikmDQM3JS/> before `00_project-doc.Rmd` can be run!

Files to be placed in folder `data`:

- `embs_2D_layout_real_dat.RData`
- `embs_real_dat.RData`
- `sec4_real_dats.RData`

Files to be placed in folder `data/datasets`

- `mnist_train.csv`

Technical aspects

This document gathers all necessary information for reproducibility. In the default setup, knitting the document takes a couple (~ 10) minutes. All relevant code will be part of the output, computation heavy experiments are – however – not executed. The corresponding code chunks are set to `eval=FALSE` and provide rough estimates for computation times for the individual experiments (obtained on a standard notebook with Linux Mint 19.2 Cinnamon, 1.90GHz × 4, 16 GB RAM, 8 cores). To run individual experiments the setup chunk needs to be run!

```
knitr::opts_chunk$set(  
  message = FALSE,  
  warning = FALSE  
)  
  
source("R/setup.R")  
source("R/help_funs.R")
```

Section 3

3.1 Experiments on the synthetic datasets E_{100} , E_{1000} , U_3 & U_{1003} .

```
# Number of clusters
n_g <- 3
n <- 500 # obs per clust
lbls <- rep(seq_len(3), each = n)

# UMAP
k <- 5 # umaps locality parameter
d <- 2 # dimensionality of embedding

# DBSCAN
eps_range <- seq(0.01, 50, by = 0.01)

# Data
equal_dens <-
  list(
    means = c(0, 0.5, 1),
    n = n,
    sigs = rep(1, n_g)
  )

unequal_dens <-
  list(
    p = 3,
    n = n,
    means = c(0, 3, 7),
    sigs = c(0.1, 1, 3)
  )

exp_settings <-
  list(
    e100 = c(
      list(p = 100),
      equal_dens
    ),
    e1000 = c(
      list(p = 1000),
      equal_dens
    ),
    u3 = unequal_dens,
    u1003 = unequal_dens
  )

set.seed(112)
exp_sec2_dat <- lapply(exp_settings, function(set) do.call(cluster_dat, set))
# set random states for UMAP embeddings reproducibility
set.seed(113)
rand_states <- sample(1:10000000, 4)

# add irrelevant features to create setting U_1000
```

```

exp_sec2_dat$u1003 <- cbind(exp_sec2_dat$u1003, matrix(runif(1500000), ncol = 1000))

# precomputing distances reduces computation time in dbscan if p is large
exp_sec2_dists <- lapply(exp_sec2_dat, dist)

exp_sec2_emb_dists <-
  mapply(function(dis, rand) {
    emb <- umap::umap(as.matrix(dis), random_state = rand,
                       n_neighbors = k, n_components = d, input = "dist")
    emb_dists <- dist(emb$layout)
    emb_dists
  },
  dis = exp_sec2_dists,
  rand = rand_states,
  SIMPLIFY = FALSE)

# approx. computation time for eps_range = seq(0.01, 50, by = 0.01): 2.5 h on 7 cores
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 7
}

exp_sec2_res <- parallel::mclapply(
  c(exp_sec2_dists, exp_sec2_emb_dists),
  function(dat) cluster_res(dat, eps_range = eps_range, lbls = lbls),
  mc.cores = cores_to_use
)


dt_sec2_res <- cbind(
  method = rep(c("DBSCAN", "UMAP+DBSCAN"), each = length(exp_settings) * length(eps_range)),
  setting = rep(names(exp_sec2_res), each = length(eps_range)),
  eps = rep(eps_range, length(exp_sec2_res)),
  as.data.table(do.call(rbind, exp_sec2_res))
)

dt_sec2_res_long <- melt(dt_sec2_res,
                           id.vars = c("method", "setting", "eps"),
                           measure.vars = c("ARI", "NMI"),
                           variable.name = "Measure",
                           value.name = "Performance")


# save(dt_sec2_res_long, file = "vignettes/data/res_sec2_long-range.RData")

```

A: DBSCAN

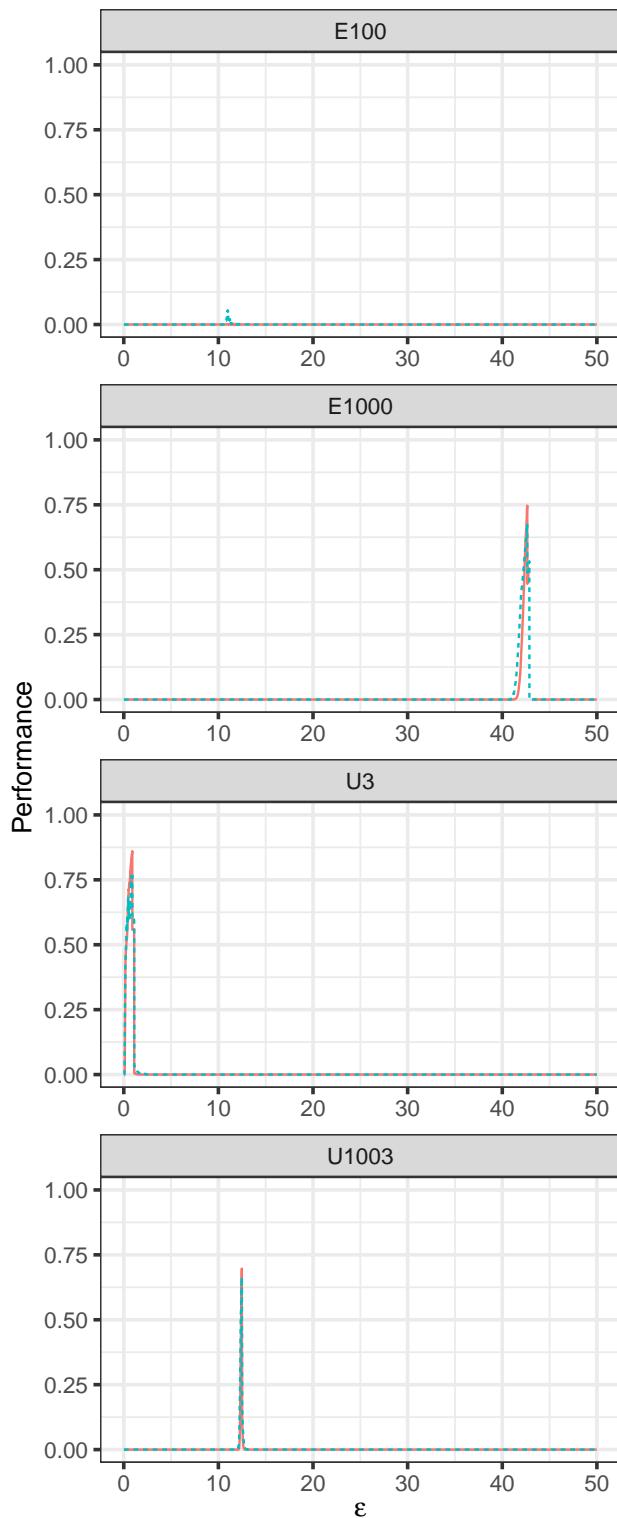

B: DBSCAN+UMAP-5

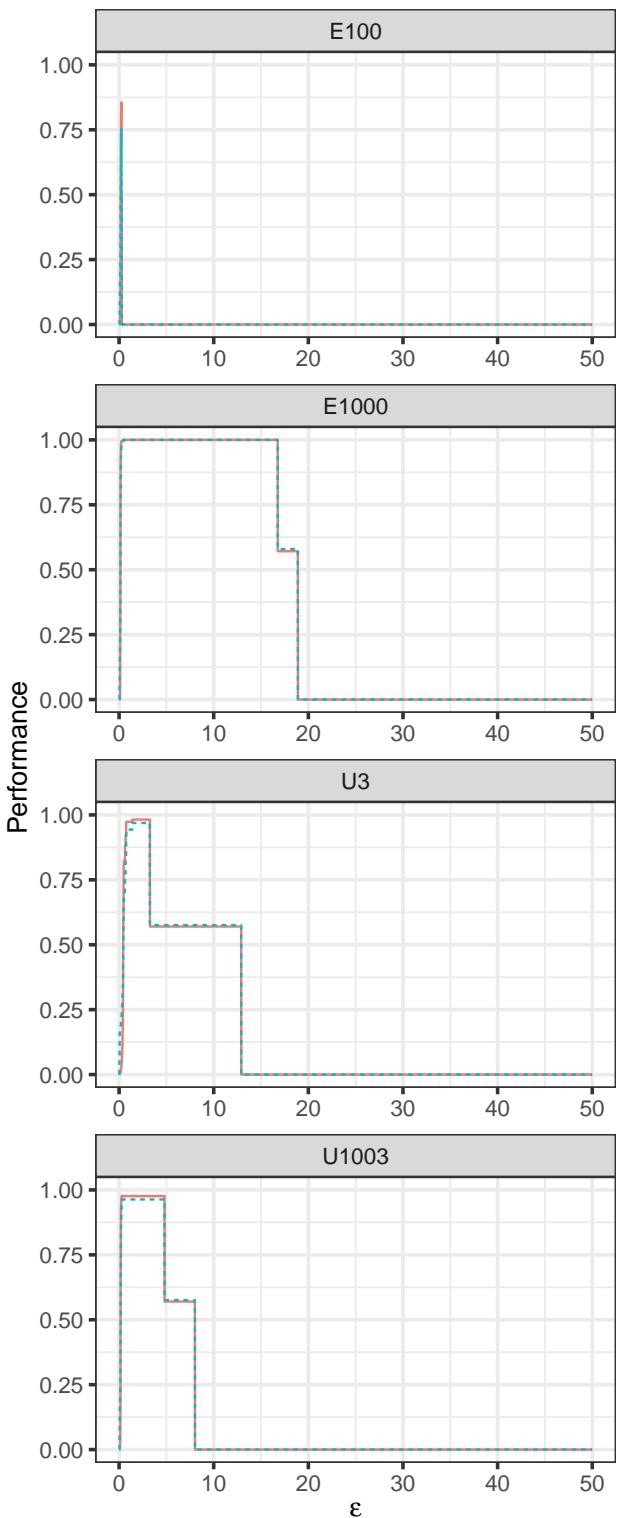

Measure — ARI - - - NMI

```
# Optimal values
dt_sec2_res_long[method == "DBSCAN", max(Performance), by = c("nic_set", "Measure")]
```

```

##      nic_set Measure      V1
## 1:    E100     ARI 0.0025
## 2:   E1000     ARI 0.7469
## 3:     U3     ARI 0.8604
## 4:  U1003     ARI 0.6970
## 5:    E100     NMI 0.0539
## 6:   E1000     NMI 0.6780
## 7:     U3     NMI 0.7662
## 8:  U1003     NMI 0.6645

dt_temp <- dt_sec2_res_long
dt_temp[dt_temp[, .I[which.max(Performance)]], by = c("method", "nic_set", "Measure")]$V1]

##           method setting   eps Measure Performance nic_set
## 1:      DBSCAN    e100 11.32     ARI     0.0025    E100
## 2:      DBSCAN   e1000 42.64     ARI     0.7469   E1000
## 3:      DBSCAN       u3  0.90     ARI     0.8604     U3
## 4:      DBSCAN   u1003 12.48     ARI     0.6970   U1003
## 5: UMAP+DBSCAN    e100  0.24     ARI     0.8554    E100
## 6: UMAP+DBSCAN   e1000  0.46     ARI     1.0000   E1000
## 7: UMAP+DBSCAN       u3  1.41     ARI     0.9821     U3
## 8: UMAP+DBSCAN   u1003  0.28     ARI     0.9772   U1003
## 9:      DBSCAN    e100 10.98     NMI     0.0539    E100
## 10:     DBSCAN   e1000 42.64     NMI     0.6780   E1000
## 11:     DBSCAN       u3  0.90     NMI     0.7662     U3
## 12:     DBSCAN   u1003 12.48     NMI     0.6645   U1003
## 13: UMAP+DBSCAN    e100  0.24     NMI     0.7568    E100
## 14: UMAP+DBSCAN   e1000  0.46     NMI     1.0000   E1000
## 15: UMAP+DBSCAN       u3  1.41     NMI     0.9689     U3
## 16: UMAP+DBSCAN   u1003  0.33     NMI     0.9634   U1003

# Sampling variability
source("R/rep_fun.R")

# REPLICATIONS
REPS <- 50
eps_rng <- c(-0.2, 0, 0.2)

# SETTINGS
settings <- c("e100", "e1000", "u3", "u1003")

# Number of clusters
n_g <- 3
n <- 500 # obs per clust
lbls <- rep(seq_len(3), each = n)

# Data
equal_dens <-
  list(
    means = c(0, 0.5, 1),
    n = n,
    sigs = rep(1, n_g)
  )

unequal_dens <-

```

```

list(
  p = 3,
  n = n,
  means = c(0, 3, 7),
  sigs = c(0.1, 1, 3)
)

exp_settings <-
list(
  e100 = c(
    list(p = 100),
    equal_dens
  ),
  e1000 = c(
    list(p = 1000),
    equal_dens
  ),
  u3 = unequal_dens,
  u1003 = unequal_dens
)

# OPTIMAL EPS VALUES (w.r.t ARI)
load("data/results/res_sec2_long-range.RData")
eps_opt_vals <- dt_sec2_res_long[dt_sec2_res_long[Measure == "ARI"], .I[which.max(Performance)], by = c()

# RUN EXPs
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 4
}

# comp time: ~ 15 min on four cores
res_reps <- parallel::mclapply(
  settings,
  function(set) rep_fun(setting = set, opt_vals = eps_opt_vals, reps = REPS, seed = TRUE, exp_settings =
  mc.cores = cores_to_use
)

eps_opt <- TeX("$\\epsilon_{opt}$")
eps_opt_p <- TeX("$\\epsilon_{opt} + 0.2$")
eps_opt_m <- TeX("$\\epsilon_{opt} - 0.2$")

dt_res_reps <- rbindlist(res_reps)
dt_res_reps[, Eps := ordered(rep(c("-0.2", eps_opt, "+0.2"), 400), levels = c("-0.2", eps_opt, "+0.2"))

rep_smry <-
dt_res_reps[, 
  .(meanARI = round(mean(ARI), 2),
  sdARI = round(sd(ARI), 2),
  meanNMI = round(mean(NMI), 2),
  sdNMI = round(sd(NMI), 2)),

```

```

    by = c("set", "method", "eps", "Eps")]

rep_smry[Eps == "epsilon[opt]", .(set, method, meanARI, sdARI, meanNMI, sdNMI)]

##      set     method meanARI sdARI meanNMI sdNMI
## 1: e100     DBSCAN    0.00   0.01    0.01   0.01
## 2: e100 UMAP+DBSCAN    0.65   0.23    0.58   0.18
## 3: e1000    DBSCAN    0.55   0.20    0.54   0.16
## 4: e1000 UMAP+DBSCAN    1.00   0.00    1.00   0.00
## 5: u3       DBSCAN    0.84   0.10    0.77   0.06
## 6: u3     UMAP+DBSCAN    0.90   0.16    0.88   0.15
## 7: u1003    DBSCAN    0.37   0.16    0.40   0.16
## 8: u1003 UMAP+DBSCAN    0.97   0.01    0.95   0.02

```

3.2 Toy example

Experiments on the simply toy example.

```

toy_exp <- matrix(c(0, 0.6, 0.7, 1.3, 1.2, 1.5,
                     0.6, 0, 0.5, 0.75, 1.6, 1.3,
                     0.7, 0.5, 0, 1.4, 1.3, 1.1,
                     1.3, 0.75, 1.4, 0, 0.7, 0.75,
                     1.2, 1.6, 1.3, 0.7, 0, 0.75,
                     1.5, 1.3, 1.1, 0.75, 0.75, 0),
                     nrow = 6)

lbls <- c(1, 1, 1, 2, 2, 2)
ks <- c(k6 = 6, k3 = 3, k2 = 2)

# We use uwot::umap implementation here.
# Other than umap::umap, which is used in the other experiments,
# uwot::umap provides the high dim fuzzy graph, i.e. the topological
# representation (fgraph) as sparse matrix, however it is less well
# reproducible.
# - non-zero entries give the membership strength of th edge connecting
#   i to j (i.e. prob, similarity in tSNE)
# - can be used to compare the original distance matrix to the UMAP
#   induced distance metric
# - in uwot::umap default value for min_dist = 0.01 (in contrast to 0.1
#   in umap::umap). To make it consistent with the other experiments we
#   set it two umap::umap defaults (it does not change results)
# - "If you are only interested in the fuzzy input graph (e.g. for
#   clustering), setting 'n_epochs = 0' will avoid any further
#   sparsifying." (see uwot::umap help page)
min_dist <- 0.1
toy_dists <- as.dist(toy_exp)

# fuzzy graphs for different values of k (only fgraph --> n_epochs = 0)
l_embs_toy <- lapply(
  ks,
  function(k) uwot::umap(toy_dists, n_neighbors = k, ret_extra = "fgraph",
                         n_epochs = 0,
                         min_dist = min_dist)

```

```

)

lapply(l_embs_toy, function(emb) round(emb$fgraph, 2))

## $k6
## 6 x 6 sparse Matrix of class "dgCMatrix"
##
## [1,] .    1.00 0.95 0.29 0.53 0.25
## [2,] 1.00 .    1.00 0.90 0.19 0.30
## [3,] 0.95 1.00 .    0.24 0.45 0.58
## [4,] 0.29 0.90 0.24 .    1.00 1.00
## [5,] 0.53 0.19 0.45 1.00 .    1.00
## [6,] 0.25 0.30 0.58 1.00 1.00 .
##
## $k3
## 6 x 6 sparse Matrix of class "dgCMatrix"
##
## [1,] .    1.00 0.83 .    .
## [2,] 1.00 .    1.00 0.58 .
## [3,] 0.83 1.00 .    .
## [4,] .    0.58 .    .
## [5,] .    .    1.00 .
## [6,] .    .    1.00 1 .
##
## $k2
## 6 x 6 sparse Matrix of class "dgCMatrix"
##
## [1,] . 1 . .
## [2,] 1 . 1 .
## [3,] . 1 . .
## [4,] . . . 1 1
## [5,] . . . 1 .
## [6,] . . . 1 .

# dbscan clustering based on fgraphs

# turn similarities into dissimilarities via  $1 - v_{ij}$ 
l_fgraph_dis <- lapply(
  l_embs_toy,
  function(emb) {
    temp <- as.matrix(1 - round(emb$fgraph, 2))
    diag(temp) <- 0
    as.dist(temp)
  }
)

eps_range <- seq(0, 4, by = 0.01)

# compute dbscan clusters for different eps values
opt_eps <-
  lapply(
    l_fgraph_dis,
    function(fgraph) {
      sapply(

```

```

    eps_range,
    function(eps_val) {
      dbs <- dbscan(fgraph, eps = eps_val, minPts = 3)
      all(dbs$cluster == c(1, 1, 1, 2, 2, 2))
    }
  )
}

# epsilon ranges yielding optimal cluster results
lapply(
  opt_eps,
  function(eps) range(eps_range[eps])
)

## $k6
## [1] 0.00 0.09
##
## $k3
## [1] 0.00 0.42
##
## $k2
## [1] 0.00 0.99

# The same as before but on the embedding coordinates instead of the fgraph only

# full grown embeddings (2D)
set.seed(3) # !!! see https://github.com/jlmelville/uwot, A Note on Reproducibility !!

l_embs_toy_full <- lapply(
  ks,
  function(k) uwot::umap(toy_dists, n_neighbors = k, min_dist = min_dist,
    # For reproducibility:
    a = 1.8956, b = 0.8006, approx_pow = TRUE, init = "spca")
)

eps_range_full <- seq(0, 40, by = 0.01)

# compute dbscan clusters for different eps values
opt_eps_full <-
  lapply(
    l_embs_toy_full,
    function(emb) {
      sapply(
        eps_range_full,
        function(eps_val) {
          dbs <- dbscan(emb, eps = eps_val, minPts = 2)
          all(dbs$cluster == c(1, 1, 1, 2, 2, 2))
        }
      )
    }
  )

# epsilon ranges yielding perfect cluster results

```

```

lapply(
  opt_eps_full,
  function(eps) range(eps_range_full[eps])
)

## $k6
## [1] 0.77 0.97
##
## $k3
## [1] 0.69 1.81
##
## $k2
## [1] 0.57 7.12

# !!! The results may not perfectly reproducible !!!
# See https://github.com/jlmelville/uwot, A Note on Reproducibility

reps <- 25

if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 3
}

# computation time ~ 3 min
l_embs_toy_rep <- lapply(
  seq_len(reps),
  function(rep) {
    parallel::mclapply(
      ks,
      function(k) {
        set.seed(rep)
        uwot::umap(toy_dists, n_neighbors = k, min_dist = min_dist,
                   # For reproducibility:
                   a = 1.8956, b = 0.8006, approx_pow = TRUE, init = "spca")
      },
      mc.cores = cores_to_use
    )
  }
)

eps_range_full <- seq(0.01, 40, by = 0.01)
opt_eps_rep <-
  lapply(
    l_embs_toy_rep,
    function(embs) lapply(
      embs,
      function(emb) {
        sapply(
          eps_range_full,
          function(eps_val) {
            dbs <- dbSCAN(emb, eps = eps_val, minPts = 3)
            all(dbs$cluster == c(1, 1, 1, 2, 2, 2))
          }
        )
      }
    )
  )

```

```

        }
    )
}
)

dt_ranges_k2 <- sapply(
  opt_eps_rep,
  function(eps) range(eps_range_full[eps$k2])
)

dt_ranges_k3 <- sapply(
  opt_eps_rep,
  function(eps) range(eps_range_full[eps$k3])
)

dt_ranges_k6 <- sapply(
  opt_eps_rep,
  function(eps) range(eps_range_full[eps$k6])
)

# dt_ranges_k2
apply(dt_ranges_k2, 1, mean)

## [1] 0.7292 20.7496
dt_ranges_k2[, which.min(dt_ranges_k2[2, ] - dt_ranges_k2[1, ])]

## [1] 0.6 3.7
# dt_ranges_k3
apply(dt_ranges_k3, 1, mean)

## [1] 0.6992 9.5608
dt_ranges_k3[, which.min(dt_ranges_k3[2, ] - dt_ranges_k3[1, ])]

## [1] 0.71 1.65
# dt_ranges_k6
apply(dt_ranges_k6, 1, mean)

## [1] Inf -Inf
dt_ranges_k6[, which.min(dt_ranges_k6[2, ] - dt_ranges_k6[1, ])]

## [1] Inf -Inf

```

Section 4

4.1.1 Nested sphere example

```

# data
sphere_dim <- 3
sphere_n <- 10000

```


```

radii <- c(5, 3, 1)
lbls_sphs <- factor(rep(1:3, each = sphere_n), labels = c("Inner", "Middle", "Outer"))

nested_spheres <- function(n, radii, d = 3) {
  sph_1 <- runif_on_sphere(n, d, r = radii[1])
  sph_2 <- runif_on_sphere(n, d, r = radii[2])
  sph_3 <- runif_on_sphere(n, d, r = radii[3])
  rbind(sph_1, sph_2, sph_3)
}

set.seed(3)
exp_sphs_dat <- nested_spheres(n = sphere_n, radii = radii, d = sphere_dim)

```

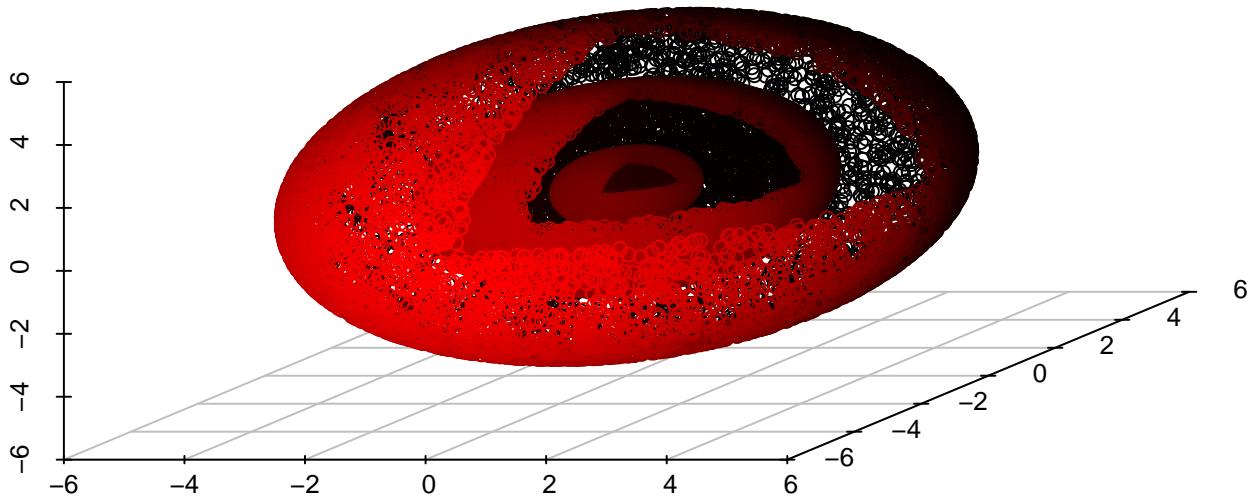

```

# experiments
set.seed(55)
# comp. time ~ 20 min
exp_sphs_emb7 <- umap::umap(exp_sphs_dat, n_neighbors = 7, n_components = 2)
exp_sphs_emb15 <- umap::umap(exp_sphs_dat, n_neighbors = 15, n_components = 2)
emb_sphs <- list(emb7 = exp_sphs_emb7, emb15 = exp_sphs_emb15)
# save(emb_sphs, file = "vignettes/data/emb_sphs.RData")

eps_range_sphs <- seq(0.01, 10, by = 0.01)

# ~ 4.1 h for n = 10000 & eps_range = seq(0.01, 10, by = 0.01)

if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 3
}
exp_sphs_res <- parallel::mclapply(
  list(exp_sphs_dat, exp_sphs_emb7$layout, exp_sphs_emb15$layout),
  function(dat) cluster_res(dat, eps_range = eps_range_sphs, lbls = lbls_sphs),
  mc.cores = cores_to_use
)

dt_sphs_res <- cbind(
  method = ordered(

```

```

rep(c("DBSCAN", "DBSCAN+UMAP-7", "DBSCAN+UMAP-15"), each = length(eps_range_sphs)),
  levels = c("DBSCAN", "DBSCAN+UMAP-7", "DBSCAN+UMAP-15")),
  eps = rep(eps_range_sphs, 3),
  as.data.table(do.call(rbind, exp_sphs_res))
)


# save(dt_sphs_res, file = "vignettes/data/res_sec3_sphs.RData")


```

```

##           used   (Mb) gc trigger   (Mb) max used   (Mb)
## Ncells  2327180 124.3    4066555 217.2  4066555 217.2
## Vcells 19049887 145.4    34762713 265.3  34762696 265.3

```

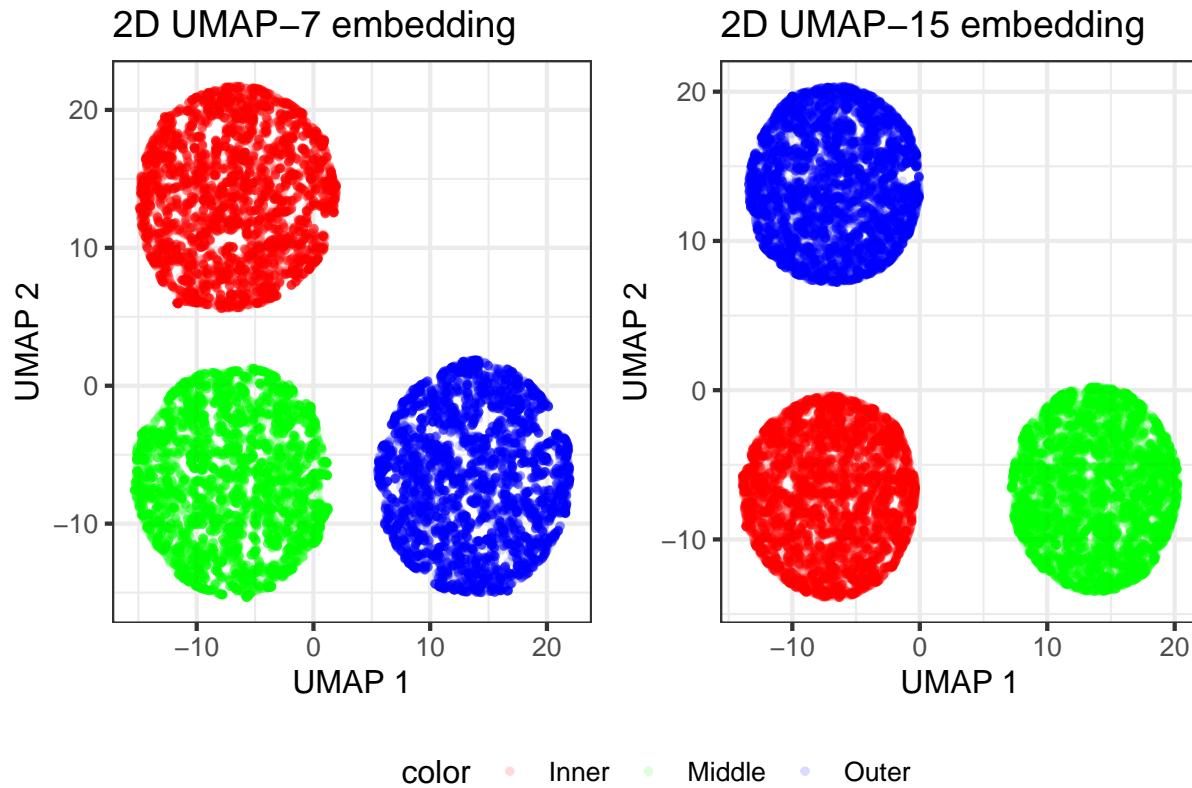

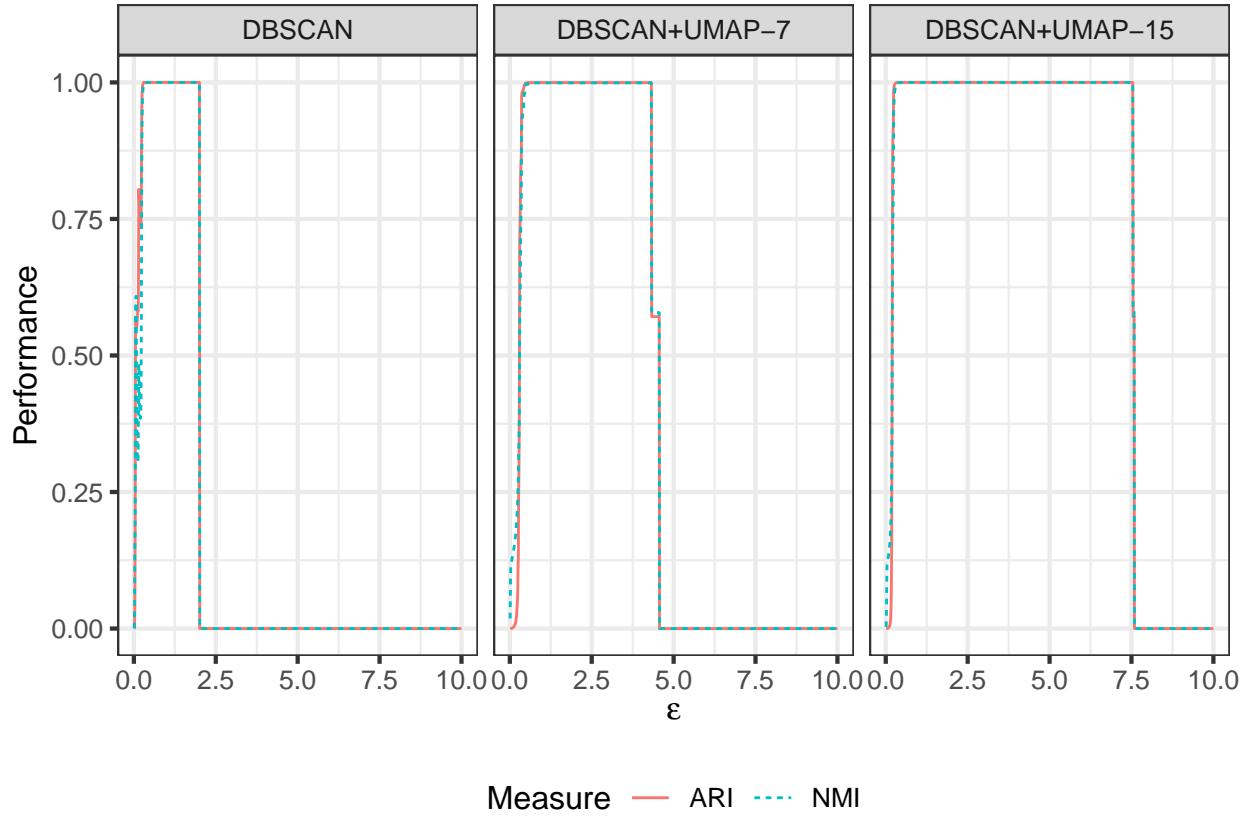

4.1.2 Impossible data

```
# Data

# construction of impossible data
set.seed(5)
sprls <- mlbench.spirals(300, 1.5, 0.03)
sprls$x[, 1] <- sprls$x[, 1] + 4
norm1 <- MASS::mvrnorm(n = 150, mu = c(0, 0), matrix(c(0.5, 0, 0, 0.5), nrow = 2))
norm2 <- MASS::mvrnorm(n = 150, mu = c(0, -6), matrix(c(0.5, -0.4, 0, 0.5), nrow = 2))

circleFun <- function(center = c(0,0), diameter = 1, npoints = 150){
  r = diameter / 2
  tt <- seq(0, 2 * pi, length.out = npoints)
  xx <- center[1] + r * cos(tt)
  yy <- center[2] + r * sin(tt)
  return(data.frame(x = xx, y = yy))
}

circles <- lapply(c(1, 2, 3), function(r) circleFun(c(4, -5), r))
imp_dat <- as.data.frame(rbind(sprls$x, norm1, norm2))
names(imp_dat) <- c("x", "y")
imp_dat <- do.call(rbind, c(list(imp_dat), circles))
imp_lbls <- factor(c(sprls$classes, rep(c(3, 4, 5, 6, 7), each = 150)))
```

```

umap_2d <- umap::umap(imp_dat, n_neighbors = 5, n_components = 2)
umap_3d <- umap::umap(imp_dat, n_neighbors = 5, n_components = 3)

eps_range_imp <- seq(0.01, 15, by = 0.01)


# computation time ~ 1 min
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 3
}

exp_res_imp <- parallel::mclapply(
  list(imp_dat, umap_2d$layout, umap_3d$layout),
  function(dat) cluster_res(dat, eps_range = eps_range_imp, lbls = imp_lbls),
  mc.cores = cores_to_use
)

opt_eps <- sapply(exp_res_imp, function(x) apply(x, 2, which.max))

opt_dbs_clusts <- lapply(opt_eps[, 1], function(x) dbscan(imp_dat, eps = eps_range_imp[x]))
opt_umap_clusts <- mapply(
  function(dat, eps) dbscan(dat, eps = eps_range_imp[eps]),
  eps = opt_eps[, 2:3],
  dat = list(umap_2d$layout, umap_3d$layout)
)

```

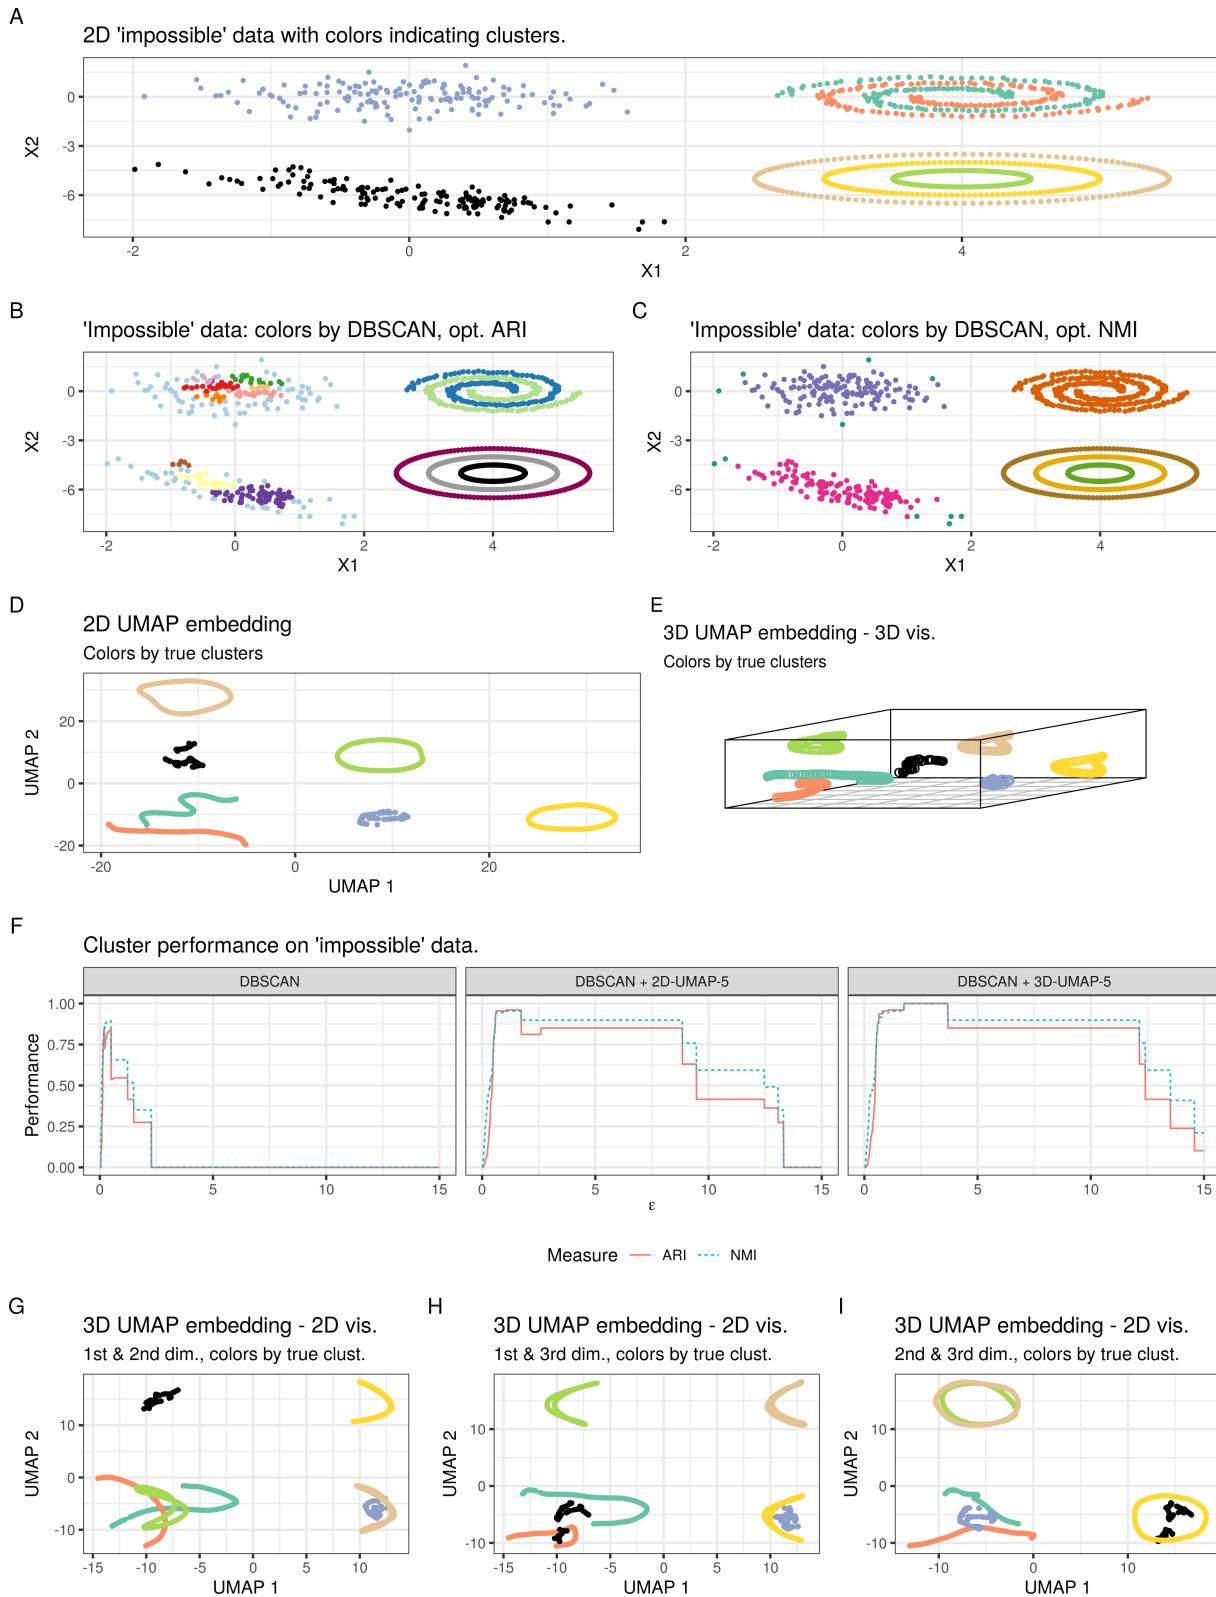

4.2 Outlier and noise points

```
# data setup

p <- 2
n <- 500
means <- list(c(0, 2), c(4, 2))
sig <- diag(rep(0.1, p * p), p, p)


# outlier

set.seed(2)
exp_outs_dat <- do.call(
  rbind,
  lapply(means, function(mu) mvrnorm(n = n, mu = mu, Sigma = sig)))
)
exp_outs_emb <- umap::umap(exp_outs_dat, n_neighbors = 15, random_state = 2)

outs <- exp_outs_dat[, 2] < 1 | (exp_outs_dat[, 2] > 2.75 & exp_outs_dat[, 1] < 0)
lbls_outs <- rep(1:2, each = n)
lbls_outs[outs] <- 3
lbls_outs <- factor(lbls_outs, levels = c(1, 2, 3, 4),
                      labels = c("Cluster1", "Cluster2", "Outlier", "Noise"))

# noise

set.seed(4015)
noise <- cbind(runif(100, -1, 5), runif(100, 1, 3))
exp_noisy_dat <- rbind(exp_outs_dat, noise)
lbls_noise <- c(lbls_outs, factor(rep("Noise", 100)))
exp_noise_emb <- umap::umap(exp_noisy_dat, n_neighbors = 15, random_state = 2)
```

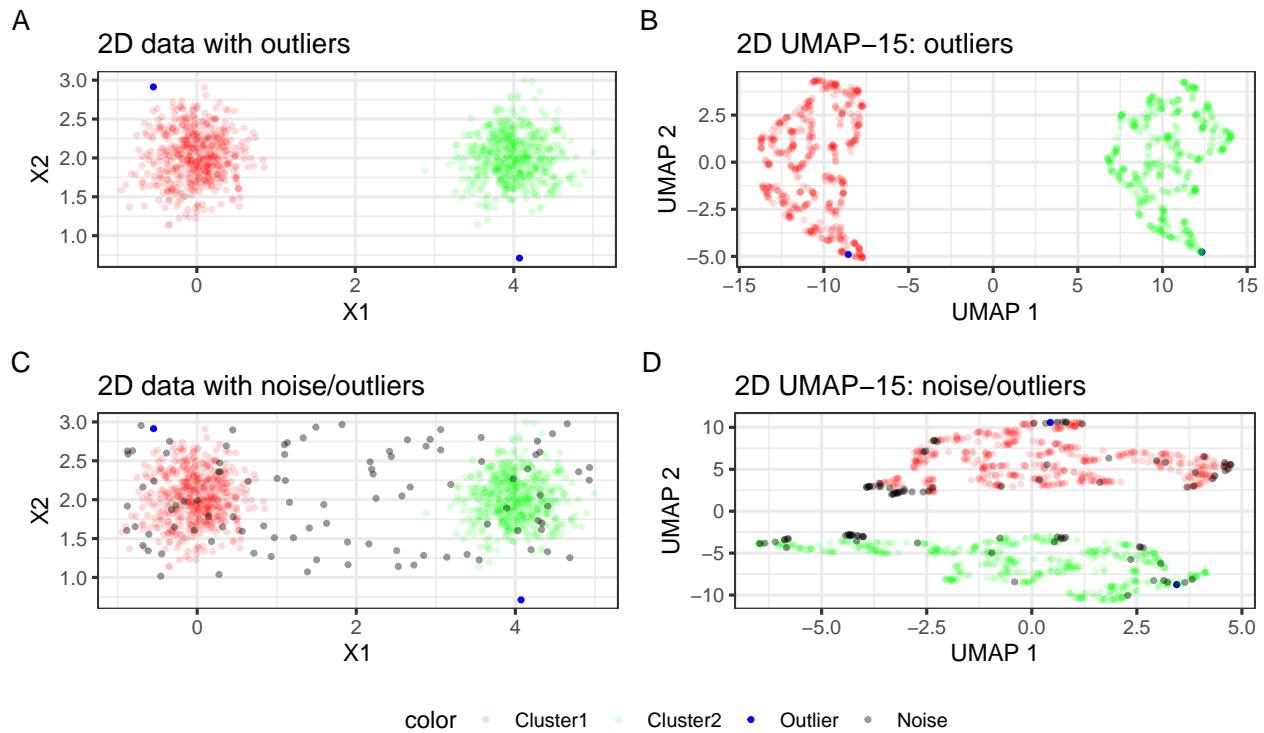

4.3 Connected components

```
# data setup

p <- 2
n <- 500
means <- list(
  c(0, 2),
  c(2, 2)
)

# cc: bridged

sig_bridge <- diag(rep(0.1, p * p), p, p)

set.seed(2)
clusters <- do.call(
  rbind,
  lapply(means, function(mu) mvrnorm(n = n, mu = mu, Sigma = sig_bridge))
)
bridge <- cbind(runif(10, 0.85, 1.15), runif(10, 1.85, 2.15))
exp_bridge_dat <- rbind(clusters, bridge)

exp_bridge_embs <- lapply(
  c(k15 = 15, k505 = 505),
  function(k) umap::umap(exp_bridge_dat, n_neighbors = k, random_state = 331)
)

lbls_bridge <- factor(
```

```

c(rep(1:2, each = n), rep(3, 10)),
  labels = c("Cluster1", "Cluster2", "Bridge")
)


# cc: overlap

sig_overlap <- diag(rep(1, p * p), p, p)
set.seed(2)
exp_overlap_dat <- do.call(
  rbind,
  lapply(means, function(mu) mvrnorm(n = n, mu = mu, Sigma = sig_overlap))
)

exp_overlap_embs <- lapply(
  c(k15 = 15, k505 = 505),
  function(k) umap::umap(exp_overlap_dat, n_neighbors = k, random_state = 332)
)

lbls_overlap <- factor(c(rep(1:2, each = n)), labels = c("Cluster1", "Cluster2"))

```

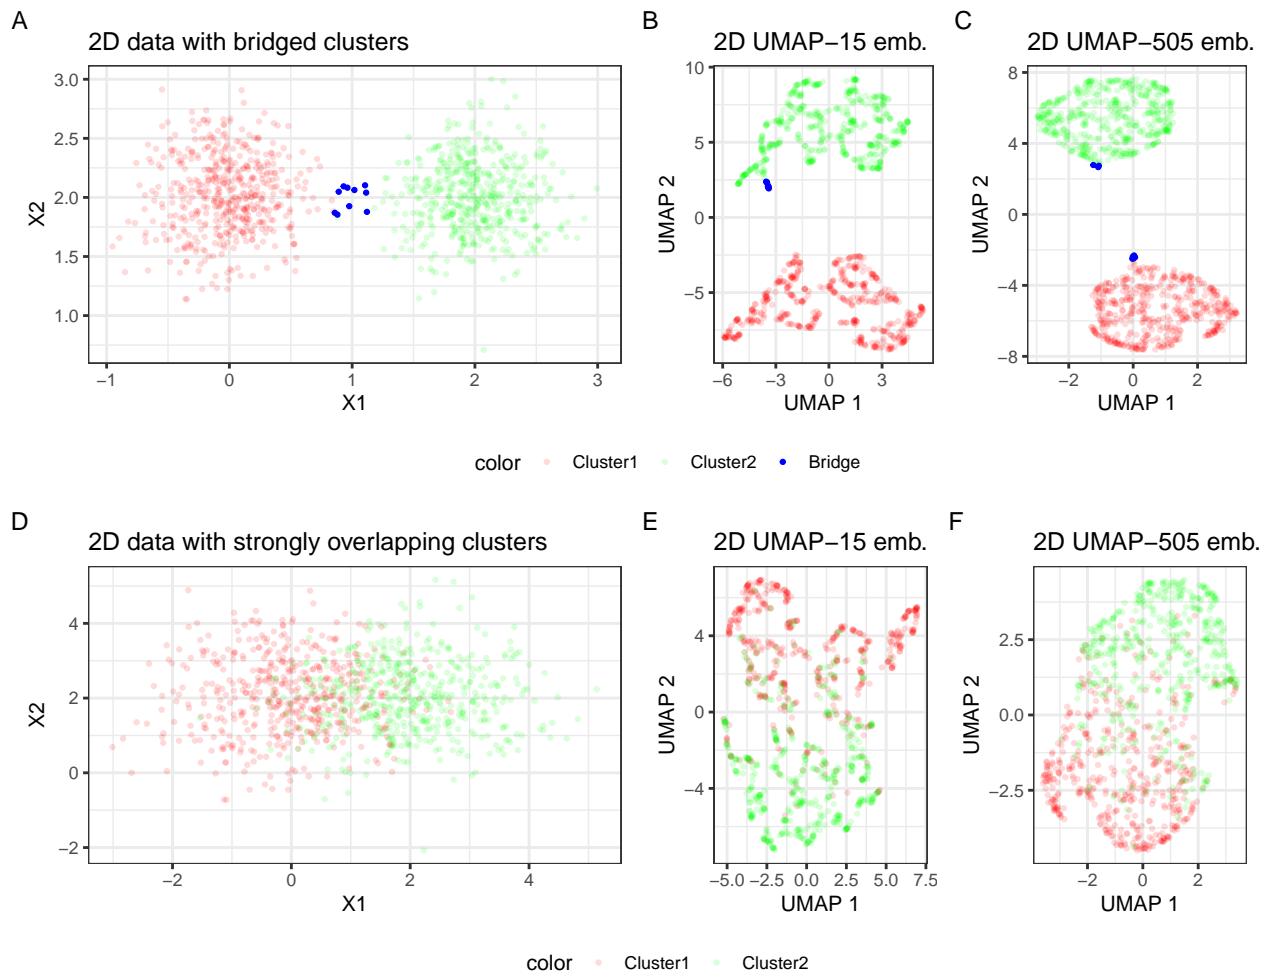

4.4 FCPS data

```
## settings

# UMAP
k <- 10
rand_state <- 10

# DBSCAN
eps_range_fcps <- seq(0.01, 20, by = 0.01)

## data

datasets <- c("Hepta", "Lsun", "Tetra", "Chainlink", "Atom",
             "EngyTime", "Target", "TwoDiamonds", "WingNut", "GolfBall")

exp_fcps_dats <- sapply(
  datasets,
  function(dat) {
    d <- read.table(paste0("data/FCPS/01FCPSdata/", dat, ".txt"))
    d <- d[, -1] # remove useless index column
    names(d) <- paste0("X", seq_len(ncol(d)))
    d
  }
)

lbls_fcps <- sapply(
  datasets,
  function(dat) {
    lbls <- read.table(paste0("data/FCPS/01FCPSdata/", dat, "_lbls.txt"))
    as.factor(lbls$V2)
  }
)

## embeddings

exp_fcps_embs <- lapply(
  exp_fcps_dats,
  function(dat) umap::umap(dat, n_neighbors = k, random_state = rand_state)
)

## clustering

# comp time: ~ 20 m
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 5
}
```

```

exp_fcps_res <- parallel::mcmapply(
  function(dat, lbls) cluster_res(
    dat = dat,
    eps_range = eps_range_fcps,
    lbls = lbls_fcps[[lbls]]
  ),
  dat = c(exp_fcps_dats, lapply(exp_fcps_embs, function(emb) emb$layout)),
  lbls = rep(datsets, 2),
  SIMPLIFY = FALSE,
  mc.cores = cores_to_use
)

## results

dt_fcps_res <- cbind(
  method = factor(rep(c("DBSCAN", "DBSCAN+UMAP-10"),
    each = length(names(exp_fcps_dats)) * length(eps_range_fcps))),
  data = rep(names(exp_fcps_res), each = length(eps_range_fcps)),
  eps = rep(eps_range_fcps, length(names(exp_fcps_res))),
  as.data.table(do.call(rbind, exp_fcps_res))
)

# save(dt_fcps_res, file = "vignettes/data/res_sec3_fcps.RData")

load("data/results/res_sec3_fcps.RData")

eps_threshold <- 0

dt_fcps_res[, .(maxARI = round(max(ARI), 2),
  maxNMI = round(max(NMI), 2)),
  by = c("data", "method")]

##          data      method maxARI maxNMI
## 1:      Hepta     DBSCAN   1.00   1.00
## 2:      Lsun     DBSCAN   1.00   1.00
## 3:      Tetra     DBSCAN   0.91   0.85
## 4: Chainlink     DBSCAN   1.00   1.00
## 5:      Atom     DBSCAN   1.00   1.00
## 6: EngyTime     DBSCAN   0.36   0.23
## 7:      Target    DBSCAN   1.00   0.97
## 8: TwoDiamonds   DBSCAN   0.95   0.85
## 9:      WingNut   DBSCAN   1.00   1.00
## 10:     GolfBall   DBSCAN   1.00   NaN
## 11:      Hepta DBSCAN+UMAP-10  1.00   1.00
## 12:      Lsun  DBSCAN+UMAP-10  1.00   1.00
## 13:      Tetra DBSCAN+UMAP-10  0.99   0.99
## 14: Chainlink DBSCAN+UMAP-10  1.00   1.00
## 15:      Atom  DBSCAN+UMAP-10  1.00   1.00
## 16: EngyTime DBSCAN+UMAP-10  0.29   0.26
## 17:      Target DBSCAN+UMAP-10  0.97   0.88
## 18: TwoDiamonds DBSCAN+UMAP-10  0.99   0.99
## 19:      WingNut DBSCAN+UMAP-10  1.00   1.00
## 20:     GolfBall DBSCAN+UMAP-10  1.00   NaN

```

```

dt_fcps_res[, .(eps_range_gr = range(eps[ARI > eps_threshold])),
             by = c("data", "method")]

##          data      method eps_range_gr
## 1:      Hepta    DBSCAN     0.04
## 2:      Hepta    DBSCAN     2.31
## 3:      Lsun     DBSCAN     0.09
## 4:      Lsun     DBSCAN     0.71
## 5:      Tetra    DBSCAN     0.24
## 6:      Tetra    DBSCAN     0.49
## 7: Chainlink    DBSCAN     0.03
## 8: Chainlink    DBSCAN     0.81
## 9:      Atom    DBSCAN     0.76
## 10:     Atom    DBSCAN    20.00
## 11: EngyTime   DBSCAN     0.03
## 12: EngyTime   DBSCAN     0.94
## 13:     Target   DBSCAN     0.04
## 14:     Target   DBSCAN     2.28
## 15: TwoDiamonds DBSCAN     0.04
## 16: TwoDiamonds DBSCAN     0.12
## 17:     WingNut DBSCAN     0.05
## 18:     WingNut DBSCAN     0.29
## 19:     GolfBall DBSCAN     0.01
## 20:     GolfBall DBSCAN    20.00
## 21:      Hepta DBSCAN+UMAP-10    0.08
## 22:      Hepta DBSCAN+UMAP-10 18.96
## 23:      Lsun   DBSCAN+UMAP-10    0.06
## 24:      Lsun   DBSCAN+UMAP-10 14.44
## 25:      Tetra  DBSCAN+UMAP-10    0.06
## 26:      Tetra  DBSCAN+UMAP-10  7.34
## 27: Chainlink  DBSCAN+UMAP-10    0.02
## 28: Chainlink  DBSCAN+UMAP-10  7.29
## 29:      Atom  DBSCAN+UMAP-10    0.03
## 30:      Atom  DBSCAN+UMAP-10 12.81
## 31: EngyTime  DBSCAN+UMAP-10    0.01
## 32: EngyTime  DBSCAN+UMAP-10    0.90
## 33:     Target DBSCAN+UMAP-10    0.03
## 34:     Target DBSCAN+UMAP-10 10.56
## 35: TwoDiamonds DBSCAN+UMAP-10    0.03
## 36: TwoDiamonds DBSCAN+UMAP-10    4.73
## 37:     WingNut DBSCAN+UMAP-10    0.03
## 38:     WingNut DBSCAN+UMAP-10    8.11
## 39:     GolfBall DBSCAN+UMAP-10    0.01
## 40:     GolfBall DBSCAN+UMAP-10 20.00
##          data      method eps_range_gr

```

Section 5

Real data experiments

```

load("data/datasets/coil20.RData")
wine <- read.csv("data/datasets/wine.csv")
pen <- read.csv("data/datasets/pendigits_csv.csv")
mnist_tr <- read.csv("data/datasets/mnist_train.csv")
mnist_te <- read.csv("data/datasets/mnist_test.csv")
mnist <- rbind(mnist_tr, mnist_te)
load_mnist() # Fashion mnist
fmnist_x <- rbind(train$x, test$x)
fmnist_lbls <- as.factor(c(train$y, test$y))

fmnist_lbls_5 <- c(train$y, test$y)
fmnist_lbls_5[fmnist_lbls %in% c(0, 3)] <- 1
fmnist_lbls_5[fmnist_lbls == 1] <- 2
fmnist_lbls_5[fmnist_lbls %in% c(2, 4, 6)] <- 3
fmnist_lbls_5[fmnist_lbls == 8] <- 4
fmnist_lbls_5[fmnist_lbls %in% c(5, 7, 9)] <- 5
fmnist_lbls_5 <- as.factor(fmnist_lbls_5)

l_dats <- list(
  iris = list(
    dat_X = apply(iris[, -5], 2, scale, center = FALSE), # features on different scales
    dat_lbls = factor(iris[, 5], labels = 1:3),
    eps_range = seq(0.01, 100, by = 0.01),
    dat_name = "Iris"
  ),
  wine = list(
    dat_X = apply(as.matrix(wine[, -1]), 2, scale), # features on much different scales and units!
    dat_lbls = wine$Wine,
    eps_range = seq(0.01, 100, by = 0.01),
    dat_name = "Wine"
  ),
  coil = list(
    dat_X = coil20[, -ncol(coil20)],
    dat_lbls = as.numeric(coil20$Label),
    eps_range = seq(0.01, 30, by = 0.01),
    dat_nam = "COIL"
  ),
  pendigits = list(
    dat_X = as.matrix(pen[, -17]),
    dat_lbls = pen$class,
    eps_range = seq(0.01, 75, by = 0.01),
    dat_name = "pendigits"
  ),
  mnist = list(
    dat_X = mnist[, -1],
    dat_lbls = as.factor(mnist$label),
    eps_range = seq(0.01, 3, by = 0.01),
    dat_name = "MNIST"
  ),
  fmnist = list(
    dat_X = fmnist_x,
    dat_lbls = fmnist_lbls,
    dat_lbls5 = fmnist_lbls_5,

```

```

    eps_range = seq(0.01, 3, by = 0.01),
    dat_name = "FMNIST"
)
)

# save(l_dats, file = "vignettes/data/sec4_real_dats.RData")

```

5.1 DBSCAN directly applied to the data

```

load("data/sec4_real_dats.RData")

dat_selection <- c("iris", "wine", "coil", "pendigits", "mnist")
# Note: Computations time >> 24 h for all settings (depending on system)
# Only using the small datasets Iris, Wine, COIL: comp. time ~ 5 min
# dat_selection <- c("iris", "wine", "coil")

# FMNIST is excluded here and processed individually due to two label sets
# to reduce computation time
l_fmnist <- l_dats["fmnist"]
l_dats <- l_dats[dat_selection]

# coil has few observations but many features, precomputing distances saves some time
coil_X <- l_dats$coil$dat_X
l_dats$coil$dat_X <- dist(l_dats$coil$dat_X)

nic_names <- c("iris" = "Iris", "wine" = "Wine", "coil" = "COIL",
              "pendigits" = "Pendigits", "mnist" = "MNIST", "fmnist" = "FMNIST")

# clustering
# computation time: several hours (depending on system >> 24 h possible)
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 6
}

clust_res_real_dir <- parallel::mcmapply(
  function(dat) cluster_res(
    dat = dat$dat_X,
    eps_range = dat$eps_range,
    lbls = dat$dat_lbls
  ),
  dat = l_dats,
  SIMPLIFY = FALSE,
  mc.cores = cores_to_use
)

dt_res_real_d <- cbind(
  Data = unlist(
    lapply(
      names(clust_res_real_dir),

```

```

        function(nam) rep(nam, nrow(clust_res_real_dir[[nam]])))
),
Method = "DBSCAN",
eps = unlist(
  lapply(
    l_dats,
    function(dat) dat$eps_range)
),
as.data.table(do.call(rbind, clust_res_real_dir))
)

dt_res_real_d$Data <- factor(
  dt_res_real_d$Data,
  labels = nic_names[levels(factor(dt_res_real_d$Data))]
)

# FMNIST
# computation time ~ 3h
clust_res_fmnist_dir <- sapply(
  l_fmnist$fmnist$eps_range,
  function(eps) dbscan::dbscan(l_fmnist$fmnist$dat_X, eps = eps)$cluster # minPts = 5 (default)
)

dt_res_fmnist_d <- lapply(
  l_fmnist$fmnist[2:3], # label sets: 10 and 5
  function(lbls) t(apply(clust_res_fmnist_dir, 2, function(res) performance(res, lbls)))
)

dt_res_fmnist_dir <- cbind(
  Data = factor(rep(c("FMNIST-10", "FMNIST-5"), each = length(l_fmnist$fmnist$eps_range))),
  Method = "DBSCAN",
  eps = rep(l_fmnist$fmnist$eps_range, 2),
  as.data.table(do.call(rbind, dt_res_fmnist_d))
)

dt_res_real_dir <- rbind(dt_res_real_d, dt_res_fmnist_dir)
dt_res_real_dir[, NMI := round(dt_res_real_dir$NMI, 3)]
# save(dt_res_real_dir, file = "vignettes/data/res_real_dir.RData")

```

5.2 DBSCAN applied to UMAP embeddings

```

load("data/sec4_real_dats.RData")

dat_selection <- c("iris", "wine", "coil", "pendigits", "mnist")

# Note: Computations time >> 24 h for all settings (depending on system)
# Only using the small datasets Iris, Wine, COIL: comp. time ~ 5 min
dat_selection <- c("iris", "wine", "coil")

# FMNIST is excluded here and processed individually due to two label sets
# to reduce computation time

```

```

l_fmnist <- l_dats["fmnist"]
l_dats <- l_dats[dat_selection]

# DBSCAN on UMAP embeddings for different k
k <- c(5, 10, 15)
d <- 3
# random state for reproducibility
rand_state <- 256445188

emb_combs <-
  cbind.data.frame(
    dat = rep(names(l_dats), each = length(k)),
    k = rep(k, length(l_dats)),
    rs = rand_state
  )

# EMBEDDING
# comp time ~ 0.5 h
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 5
}

exp_real_embs <- mcmapply(
  function(dat, k, rs) umap::umap(
    as.matrix(l_dats[[dat]]$dat_X),
    n_neighbors = k,
    n_components = d,
    random_state = rs),
  dat = emb_combs$dat,
  k = emb_combs$k,
  rs = emb_combs$rs,
  SIMPLIFY = FALSE,
  mc.cores = cores_to_use
)
names(exp_real_embs) <- paste0(names(exp_real_embs), "_k", c(5, 10, 15))

exp_combs <-
  cbind.data.frame(
    setting = paste(emb_combs$dat, emb_combs$k, sep = "_"),
    dat = rep(names(l_dats), each = length(k))
  )

exp_layout <- lapply(exp_real_embs, function(emb) emb$layout)
names(exp_layout) <- exp_combs$setting

# CLUSTERING
# comp time several hours (depending on system >> 24 h possible)
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {

```

```

cores_to_use <- 3
}

exp_real_res <- parallel::mcmapply(
  function(set, dat) cluster_res(
    dat = exp_layout[[set]],
    eps_range = l_dats[[dat]]$eps_range,
    lbls = l_dats[[dat]]$dat_lbls
  ),
  set = exp_combs$setting,
  dat = exp_combs$dat,
  SIMPLIFY = FALSE,
  mc.cores = cores_to_use
)

eps_range_length <- sapply(l_dats, function(dat) length(dat$eps_range))

dt_res_real_emb <- cbind(
  Data = rep(dat_selection, length(k) * eps_range_length),
  Method = "UMAP+DBSCAN",
  eps = unname(unlist(
    sapply(l_dats[dat_selection],
      function(dat) rep(dat$eps_range, length(k)), simplify = FALSE))),
  as.data.table(do.call(rbind, exp_real_res)),
  k = rep(rep(k, length(dat_selection)), rep(eps_range_length, each = length(k)))
)

nic_names <- c("iris" = "Iris", "wine" = "Wine", "coil" = "COIL",
  "pendigits" = "Pendigits", "mnist" = "MNIST", "fmnist" = "FMNIST")

dt_res_real_emb$Data <- factor(
  dt_res_real_emb$Data,
  labels = nic_names[levels(factor(dt_res_real_emb$Data))])
)

# FMNIST

# embeddings
# comp time ~ 0.5 h
if (Sys.info() [["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 3
}

exp_fm_embs <- mclapply(
  c(5, 10, 15),
  function(k) umap::umap(
    as.matrix(l_fmnist$fmnist$dat_X),
    n_neighbors = k,
    n_components = 3,
    random_state = 256445188),
)

```

```

    mc.cores = cores_to_use
}

# clustering
# ~ comp time ~ 3 h
if (Sys.info()["sysname"] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 3
}

exp_fmnist_res <- parallel::mclapply(
  exp_fm_embs,
  function(dat) {
    clusts <- lapply(
      l_fmnist$fmnist$eps_range,
      function(eps) dbSCAN(as.matrix(dat$layout), eps = eps)$cluster # minPts = 5 (default)
    )

    res_lbls5 <- vapply(
      clusts,
      function(clust) performance(clust, l_fmnist$fmnist$dat_lbls5),
      FUN.VALUE = numeric(2)
    )
    res_lbls10 <- vapply(
      clusts,
      function(clust) performance(clust, l_fmnist$fmnist$dat_lbls),
      FUN.VALUE = numeric(2)
    )

    rbind(res_lbls5, res_lbls10)
  },
  mc.cores = cores_to_use
)

names(exp_fmnist_res) <- k
dt_res_fm_emb <- lapply(
  exp_fmnist_res,
  function(res) {
    t_res <- t(res)
    dt_res <- as.data.table(t_res)
    dt_res
  }
)
dt_res_fm_emb <- rbindlist(dt_res_fm_emb, use.names = TRUE, idcol = TRUE)
dt_res_fm_emb <- rbind(dt_res_fm_emb[, c(1:3)], dt_res_fm_emb[, c(1, 4:5)])
dt_res_fm_emb[, "://" = rep(c("FMNIST-5", "FMNIST-10"), each = 900),
             Method = "UMAP+DBSCAN",
             eps = rep(l_fmnist$fmnist$eps_range, 6),
             k = .id)]
dt_res_fm_emb <- dt_res_fm_emb[, .id := NULL][, c(3:6, 1:2)]

```

```

# combine results
dt_res_real_emb <- rbind(dt_res_real_emb, dt_res_fm_emb)


# save(dt_res_real_emb, file = "vignettes/data/res_real_embs.RData")

dt_res_real_full <- rbind(dt_res_real_dir, dt_res_real_emb)

# save(dt_res_real_full, file = "vignettes/data/results/res_real_full.RData")

##          Data DBSCAN_NA_ARI DBSCAN_NA_NMI UMAP+DBSCAN_5_ARI UMAP+DBSCAN_5_NMI
## 1:      Iris     0.75        0.67       0.70        0.75
## 2:     Wine     0.44        0.52       0.81        0.77
## 3: Pendigits   0.58        0.70       0.80        0.82
## 4:    COIL     0.66        0.85       0.82        0.93
## 5:   MNIST     0.00        0.00       0.69        0.70
## 6: FMNIST-10   0.00        0.00       0.41        0.59
## 7: FMNIST-5    0.00        0.00       0.60        0.62
##          UMAP+DBSCAN_10_ARI UMAP+DBSCAN_10_NMI UMAP+DBSCAN_15_ARI UMAP+DBSCAN_15_NMI
## 1:           0.89        0.86       0.89        0.86
## 2:           0.81        0.78       0.80        0.79
## 3:           0.86        0.85       0.83        0.85
## 4:           0.75        0.91       0.70        0.88
## 5:           0.90        0.85       0.87        0.85
## 6:           0.40        0.54       0.38        0.54
## 7:           0.75        0.71       0.63        0.63

```

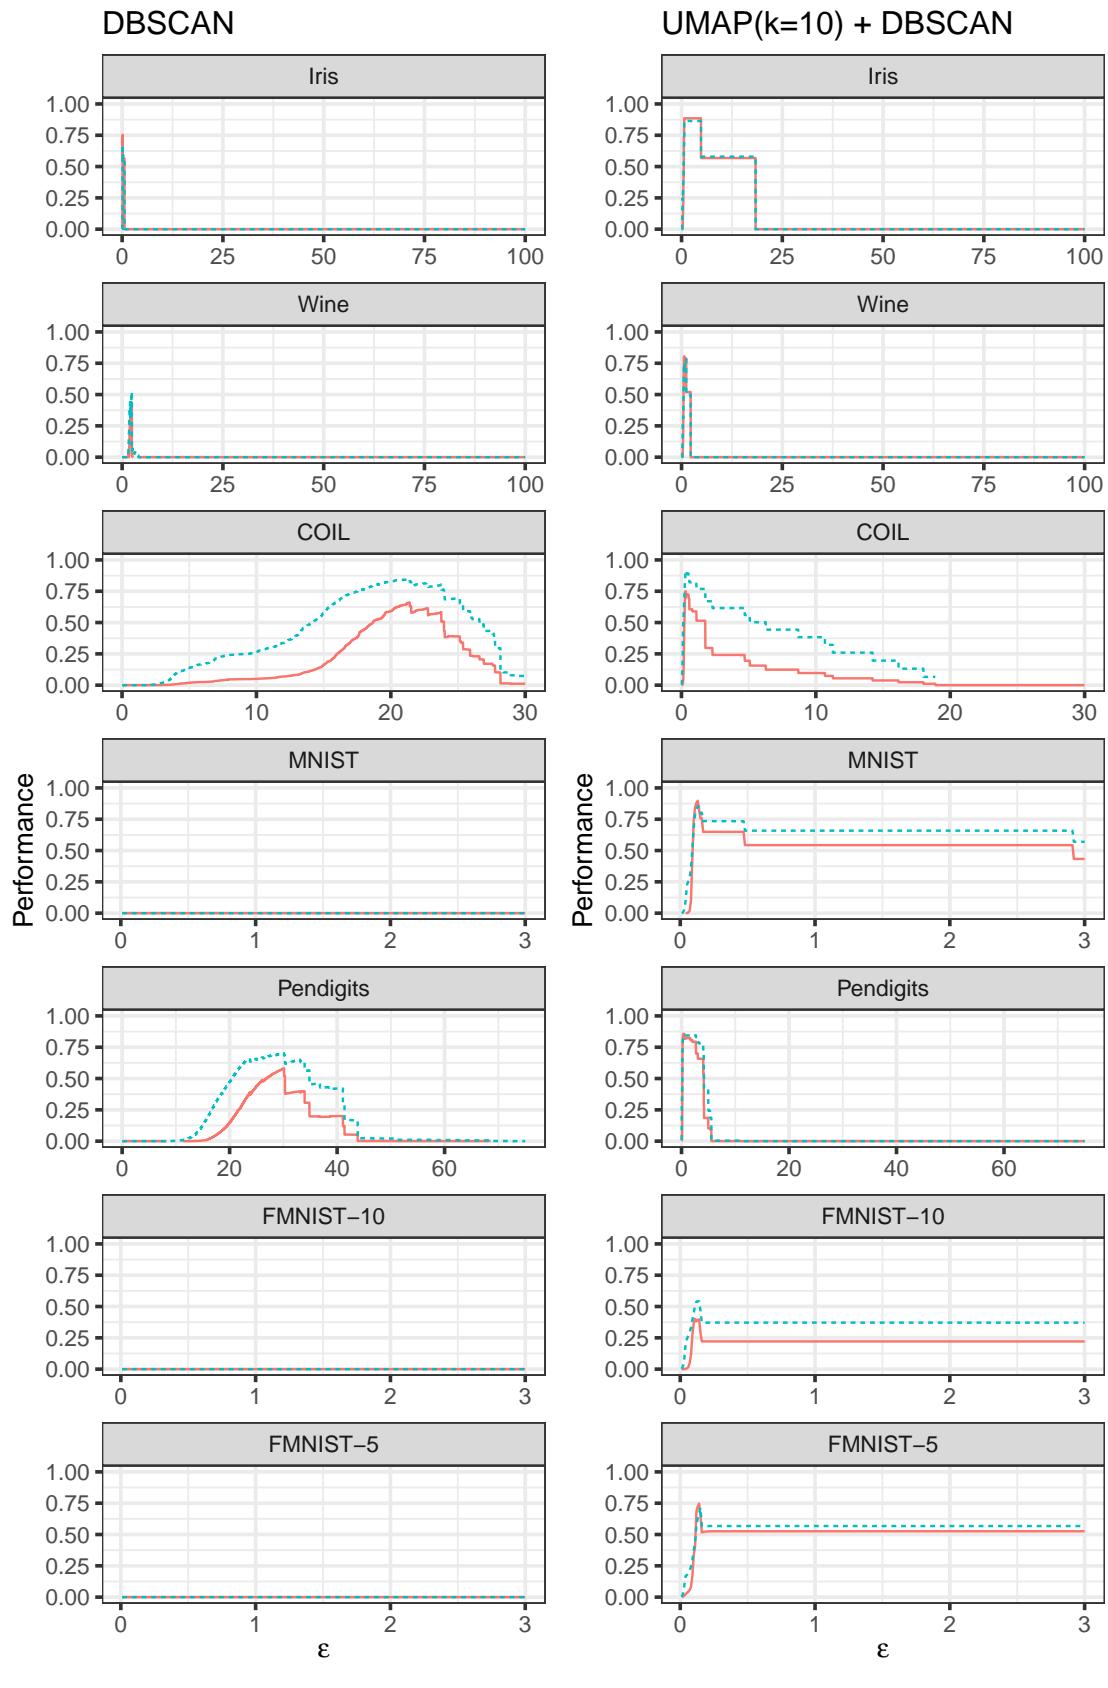

5.3 Tuning

```
l_dat <- list(
  "iris" = iris[, -5], # exclude species column
  "coil" = coil20[, -ncol(coil20)],
  "wine" = apply(as.matrix(wine[, -1]), 2, scale), # features on much different scales and units!
  "pen" = as.matrix(pen[, -17])
)

# EXPERIMENTS

# tune n_neighbors (k) parameter in UMAP and epsilon in DBSCAN
n_neighbors_range <- seq(5, 50, by = 5)
eps_range <- seq(0.1, 50, length.out = 100)

l_params <- list(n_neighbors_range, eps_range)

## All data

## computation time: ~ 3 h (on two cores)
# with
# - n_neighbors_range <- seq(5, 50, by = 5)
# - eps_range <- seq(0.1, 25, length.out = 50)

if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 2
}


l_silhouette_e50 <-
  parallel::mclapply(
    l_dat,
    function(dat) s_scores(dat = dat, params = l_params),
    mc.cores = 2
  )

names(l_silhouette_e50) <- c("Iris", "Wine", "Pendigits", "COIL")

# Optimal parameter configuration: Commented out to minimise space requirements
# lapply(l_silhouette_e50, function(x) x[scores %in% x[, max(scores)], by = k][order(V1)]$V1])

umap_opt <- umap(
  l_dat$pen,
  n_neighbors = 20,
  n_components = 3,
  random_state = 556665134
)

dbSCAN(umap_opt$layout, eps = 41.431313)
```

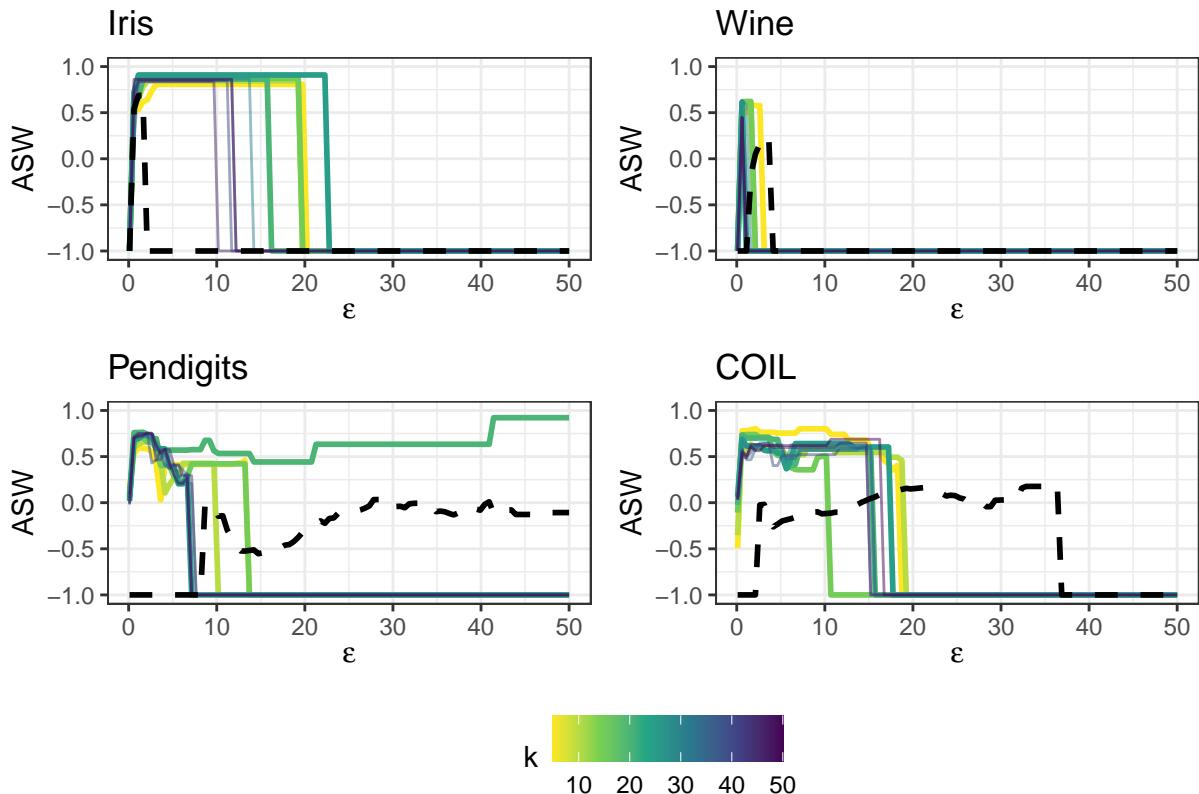


```

## DBSCAN clustering for 10992 objects.
## Parameters: eps = 41.431313, minPts = 5
## Using euclidean distances and borderpoints = TRUE
## The clustering contains 2 cluster(s) and 0 noise points.
##
##      1      2
## 10968    24
##
## Available fields: cluster, eps, minPts, dist, borderPoints

```

Appendix A

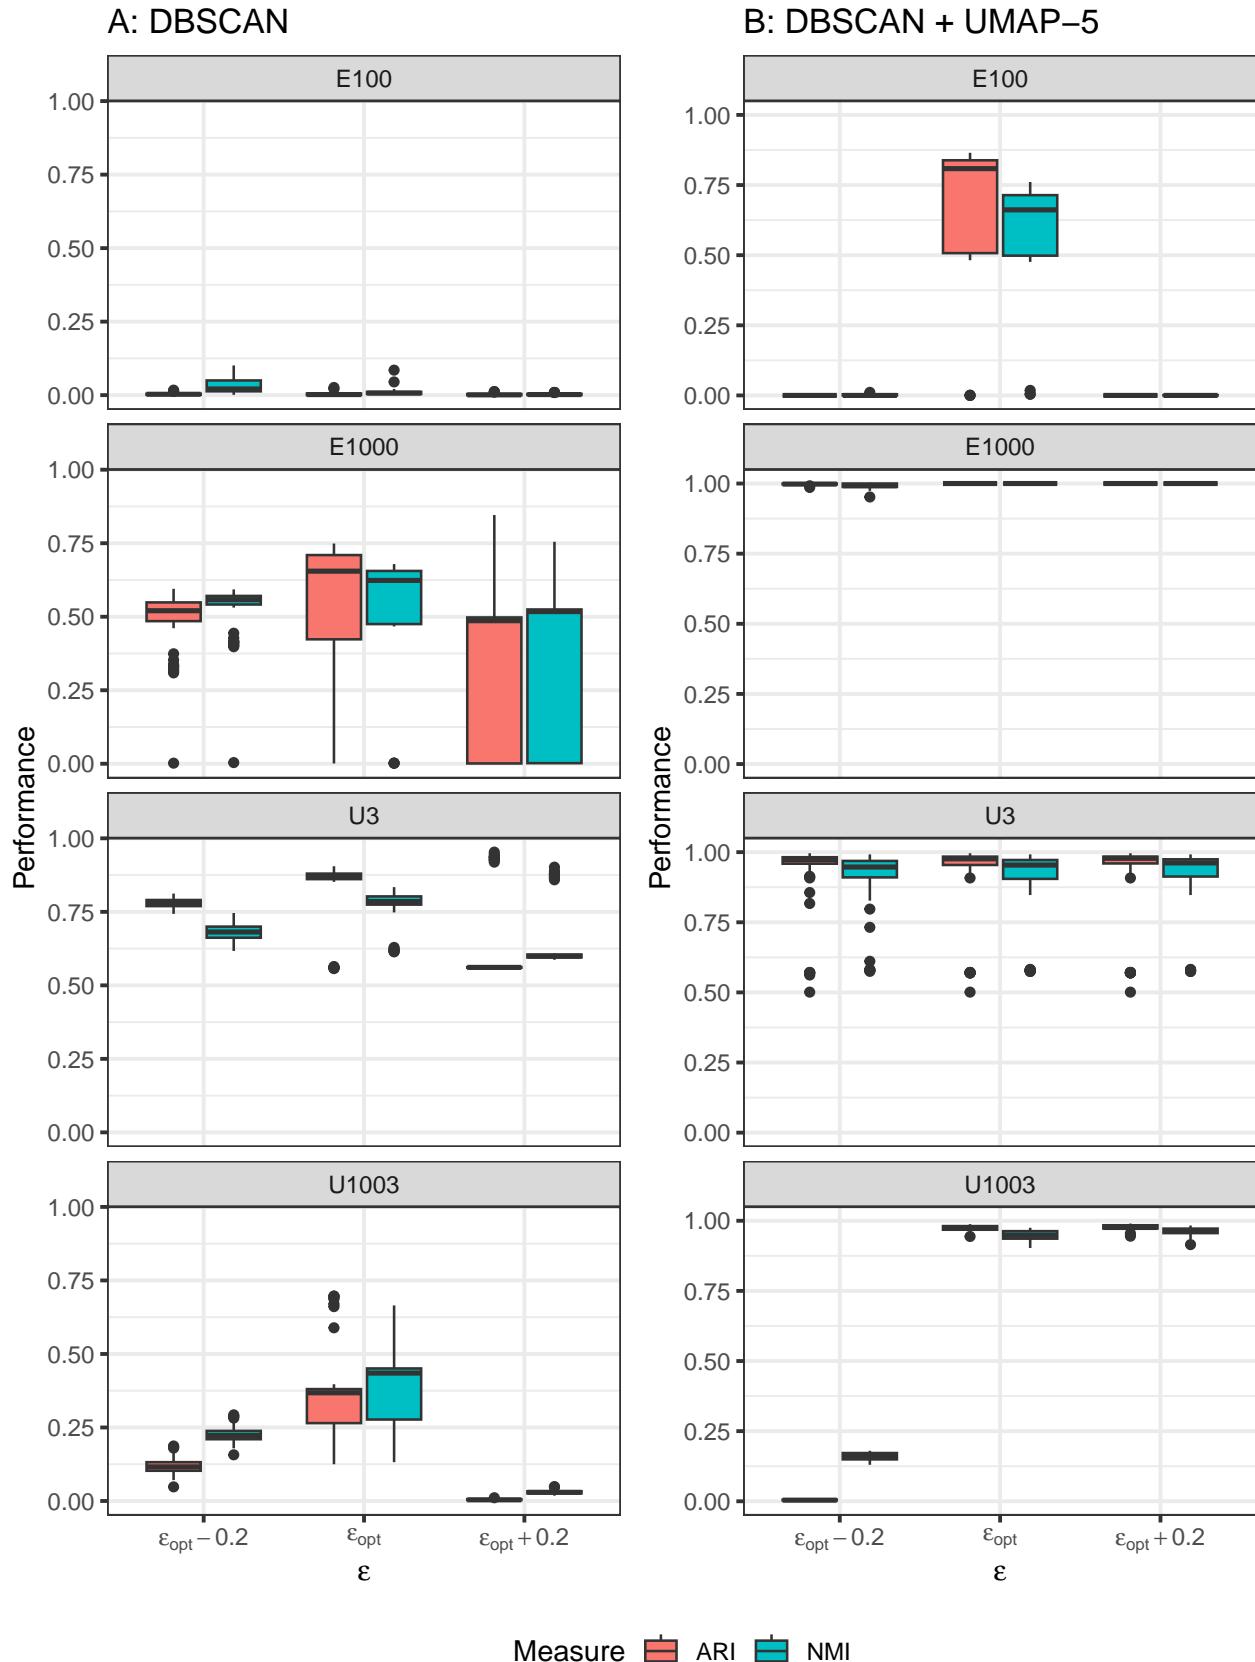

Appendix B

B1 Synthetic datasets E_{100} , E_{1000} , U_3 & U_{1003}

```
# embed each of the 4 settings 25 times to assess effect of SGD in constructing embedding
# layout on cluster results
reps <- 25
set.seed(110)
rand_states_rep <- sample(1:10000000, length(exp_settings) * reps)

rep_combs <- cbind.data.frame(
  rand_state = rand_states_rep,
  setting = rep(names(exp_sec2_dists), each = reps)
)

# ~ 1 min
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 4
}

exp_sec2_emb_rep_dists <-
parallel::mcMap(
  function(set, rand) {
    emb <- umap::umap(
      as.matrix(exp_sec2_dists[[set]]),
      random_state = rand,
      n_neighbors = k,
      n_components = d,
      input = "dist")
    emb_dists <- dist(emb$layout)
    emb_dists
  },
  set = rep_combs$setting,
  rand = rep_combs$rand_state,
  mc.cores = cores_to_use
)


eps_range_rep <- seq(0.01, 15, by = 0.01)

# ~ 8 h with eps_range_rep = seq(0.01, 15, by = 0.01)
if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 5
}

exp_sec2_rep_res <- parallel::mclapply(
  exp_sec2_emb_rep_dists,
  function(dat) cluster_res(dat, eps_range = eps_range_rep, lbls = lbls),
  mc.cores = cores_to_use
)
```

```
dt_sec2_rep_res <- cbind(
  rep = rep(seq_len(reps), each = length(eps_range_rep) * length(exp_settings)),
  setting = rep(rep_combs$setting, each = length(eps_range_rep)),
  eps = rep(eps_range_rep, length(exp_sec2_rep_res)),
  as.data.table(do.call(rbind, exp_sec2_rep_res))
)

# save(dt_sec2_rep_res, file = "vignettes/data/res_sec2_rep.RData")
```

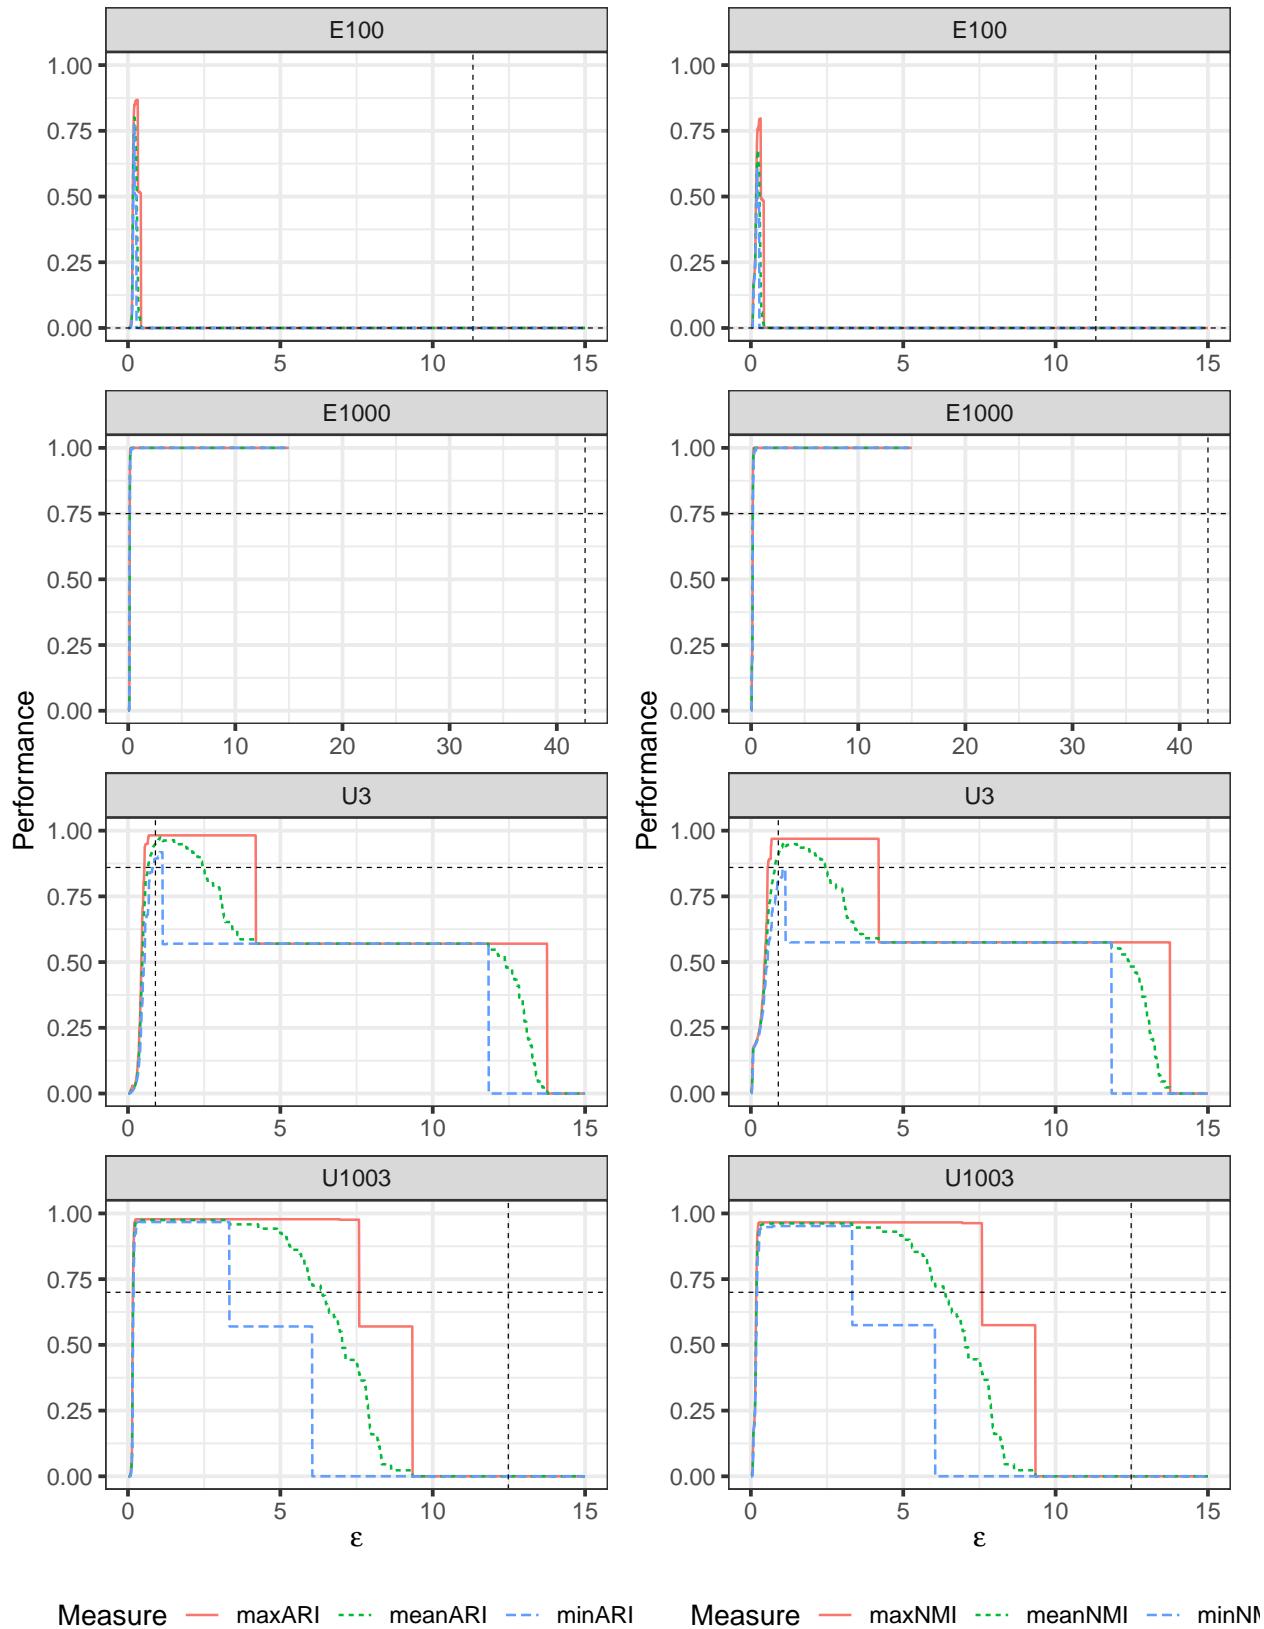

B1 Real data

```
load("data/sec4_real_dats.RData")

## Setup
reps <- 25
dat <- c("iris", "wine", "coil")
l_dats <- l_dats[dat]

# computation time ~ 5 min
for (i in seq_along(l_dats)) {
  l_dats[[i]]$dat_X <- as.matrix(dist(l_dats[[i]]$dat_X))
}

## UMAP
k <- c(5, 10, 15)
rand_state <- 412745030 + 100000 * (1:(reps * length(dat) * length(k)))
d <- 3

## DBSCAN
eps_range <- seq(0.01, 25, by = 0.01)

# Embeddings
emb_combs <- expand.grid(seq_len(reps), k, dat) # rep(k, each = reps)
colnames(emb_combs) <- c("reps", "k", "dat")
emb_combs <- cbind(emb_combs,
                     rand_state = rand_state)

if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 5
}

# computation time ~ 5 min
l_embs <- parallel::mcmapply(
  function(dat, k, rs) umap::umap(
    l_dats[[dat]]$dat_X,
    n_neighbors = k,
    n_components = d,
    random_state = rs,
    input = "dist"
  )$layout,
  dat = emb_combs$dat,
  k = emb_combs$k,
  rs = rand_state,
  SIMPLIFY = FALSE,
  mc.cores = cores_to_use
)

# Clusterings
clust_combs <- expand.grid(eps_range, seq_along(l_embs))
```

```

colnames(clust_combs) <- c("eps_val", "embedding_iter")

# computation time ~ 1h
m_res <- parallel::mclapply(
  seq_len(nrow(clust_combs)),
  function(iter, ...) {
    eps_val <- clust_combs$eps_val[iter]

    emb_iter <- clust_combs$embedding_iter[iter]
    emb_layout <- l_embs[[emb_iter]]


    dat <- emb_combs$dat[[emb_iter]]
    dat_lbls <- l_dats[[dat]]$dat_lbls

    clustering <- dbscan(emb_layout, eps = eps_val)
    perfm <- performance(clustering$cluster, dat_lbls)
  },
  mc.cores = cores_to_use
)


dt_res_real_rep <- cbind(
  data = rep(emb_combs$dat, each = length(eps_range)),
  k = rep(emb_combs$k, each = length(eps_range)),
  rep = rep(emb_combs$reps, each = length(eps_range)),
  eps = clust_combs$eps_val,
  as.data.table(do.call(rbind, m_res))
)
# save(dt_res_real_rep, file = "vignettes/data/res_sec4_rep.RData")

```

A

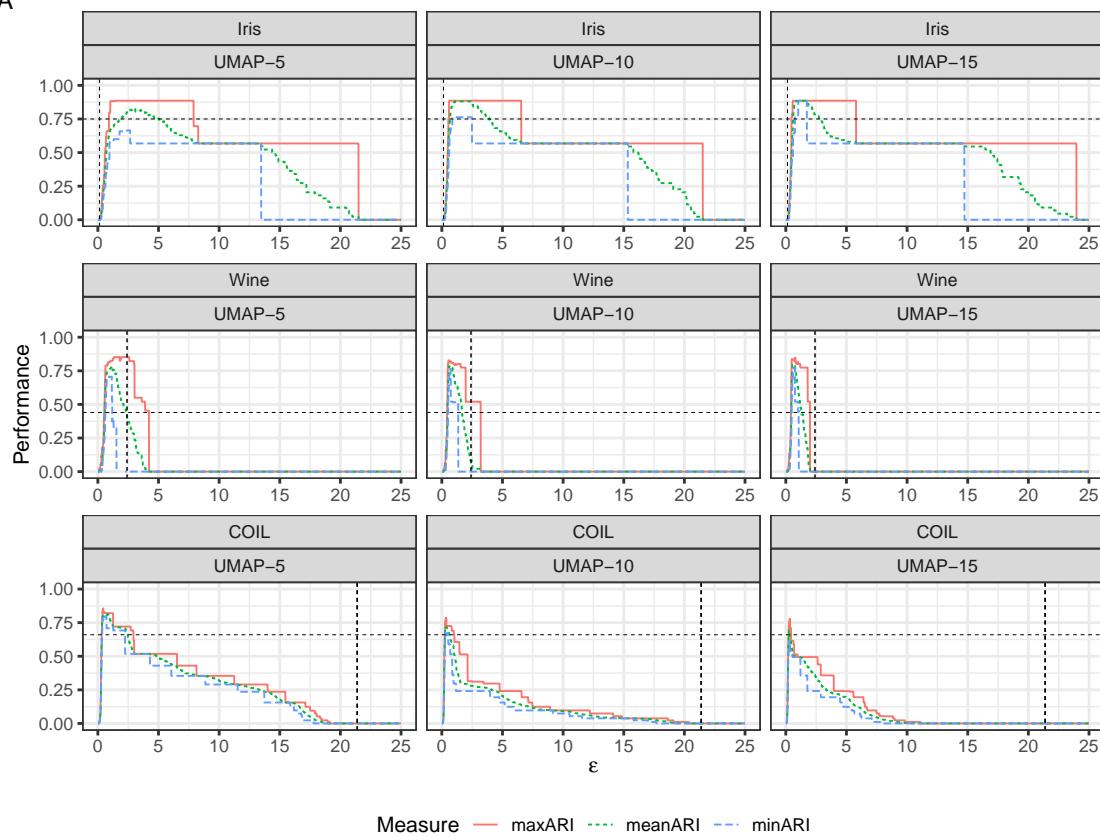

B

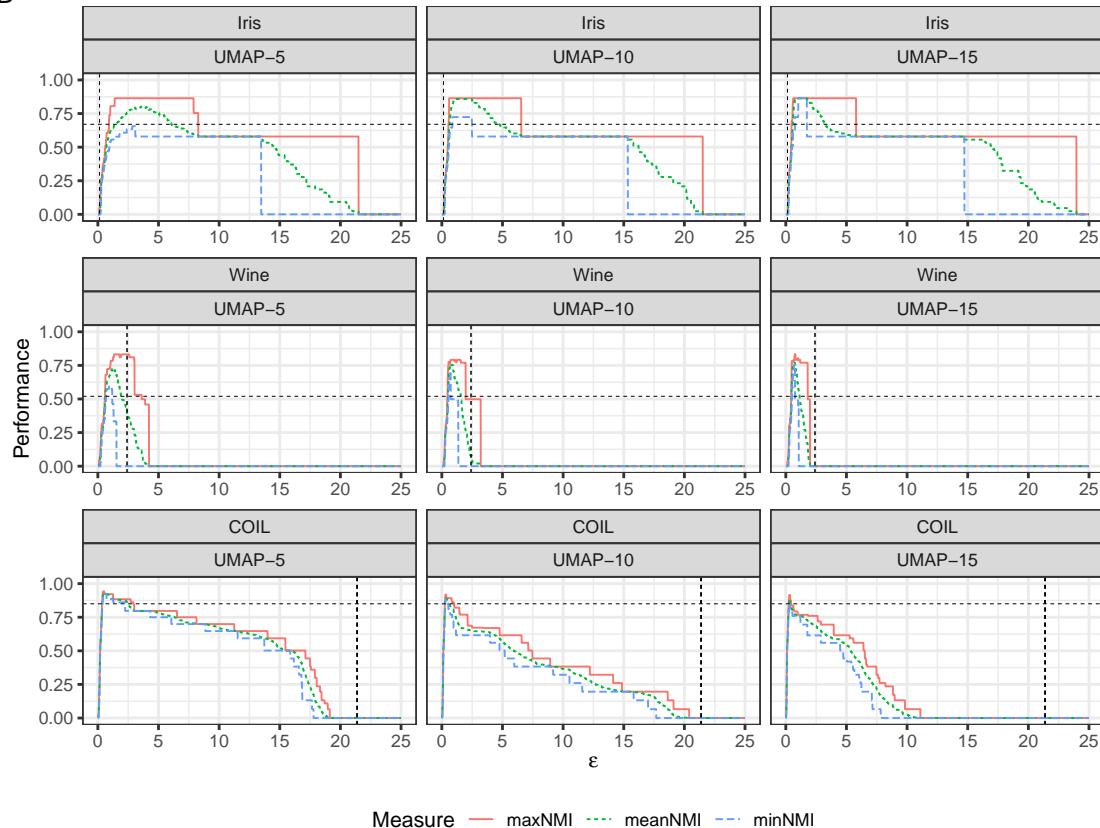

Appendix C

```
load("data/sec4_real_dats.RData")

## Setup
dat_selection <- c("iris", "wine", "coil", "pendigits")
l_dats <- l_dats[dat_selection]

# due the transformation  $d_{ij} = 1 - v_{ij}$  in  $[0, 1]$ , no eps values larger than 1 make sense.
# Since pendigits has many obs., reducing the eps range considerably reduces computation time.
# As the other datasets have lower number of obs., this is not as important.
l_dats$pendigits$eps_range <- seq(0.01, 1, by = 0.01)

min_dist <- 0.1 # note: not used in graph constr.
k <- c(5, 10, 15)

emb_combs <- expand.grid(k, dat_selection)
names(emb_combs) <- c("k", "data")

if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 3
}

# fuzzy graphs for different values of k (only fgraph --> n_epochs = 0)
l_embs_fgr <- parallel::mcmapply(
  function(dat, k) uwot::umap(
    l_dats[[dat]]$dat_X,
    n_neighbors = k,
    ret_extra = "fgraph",
    n_epochs = 0,
    min_dist = min_dist),
  dat = emb_combs$data,
  k = emb_combs$k,
  SIMPLIFY = FALSE,
  mc.cores = cores_to_use
)

# turn similarities into dissimilarities via  $1 - v_{ij}$ 
l_emb_fgr_dis <- lapply(
  l_embs_fgr,
  function(emb) {
    temp <- as.matrix(1 - round(emb$fgraph, 5))
    diag(temp) <- 0
    as.dist(temp)
  }
)

exp_combs <-
  cbind.data.frame(
    setting = paste(emb_combs$dat, emb_combs$k, sep = "_"),
    dat = rep(names(l_dats), each = length(k))
```

```

    )
names(l_emb_fgr_dis) <- exp_combs$setting

if (Sys.info()[["sysname"]] == "Windows") {
  cores_to_use <- 1
} else {
  cores_to_use <- 3
}

# computation time ~ 45 min
exp_real_fgr_res <- parallel::mcmapply(
  function(set, dat) cluster_res(
    dat = l_emb_fgr_dis[[set]],
    eps_range = l_dats[[dat]]$eps_range,
    lbls = l_dats[[dat]]$dat_lbls
  ),
  set = exp_combs$setting,
  dat = exp_combs$dat,
  SIMPLIFY = FALSE,
  mc.cores = cores_to_use
)

eps_range_length <- sapply(l_dats[dat_selection], function(dat) length(dat$eps_range))

dt_res_real_fgraph <- cbind(
  data = unlist(lapply(
    dat_selection,
    function(dat) rep(dat, length(k) * length(l_dats[[dat]]$eps_range)))
  ),
  k = rep(rep(k, length(dat_selection)), rep(eps_range_length, length(k))),
  eps = unname(unlist(
    lapply(l_dats[dat_selection],
          function(dat) rep(dat$eps_range, length(k)))),
    as.data.table(do.call(rbind, exp_real_fgr_res))
  )

# save(dt_res_real_fgraph, file = "vignettes/data/res_app_fgraph.RData")

##      Measure      V1
## 1:      ARI 0.8856970
## 2:      NMI 0.8639757
##      Measure      V1
## 1:      ARI 0.875
## 2:      NMI 0.839
##
##
## Iris
##
## fgraph+embedding
##
## Optimal values:
## 0.89 0.86
## Optimal eps-range:

```

```

##  0.67 4.82
##  0.67 4.82
##
## fgraph only
##
## Optimal values:
## 0.88 0.84
## Optimal eps-range:
##  0.6 0.61
##  0.6 0.61    Measure      V1
## 1:      ARI 0.8052042
## 2:      NMI 0.7807804
##     Measure   V1
## 1:      ARI 0.697
## 2:      NMI 0.612
##
##
## Wine
##
## fgraph+embedding
##
## Optimal values:
## 0.81 0.78
## Optimal eps-range:
##  0.64 0.69
##  1.11 1.16
##
## fgraph only
##
## Optimal values:
## 0.7 0.61
## Optimal eps-range:
##  0.5 0.5
##  0.52 0.52
##
##
## COIL
##
## fgraph+embedding
##
## Optimal eps-range (ARI/NMI > 0.6):
## 0.25 0.8
## 0.18 4.7
##
## fgraph only
##
## Optimal eps-range (ARI/NMI > 0.6):
## 0.52 0.68
## 0.45 0.79
##
## Pendigits
##
## fgraph+embedding


```

```

##
## Optimal eps-range (ARI/NMI > 0.6):
## 0.17 4.04
## 0.16 4.13
##
## fgraph only
##
## Optimal eps-range (ARI/NMI > 0.6):
## Inf -Inf
## 0.48 0.56

##      data UMAP-5_ARI UMAP-5_NMI UMAP-10_ARI UMAP-10_NMI UMAP-15_ARI
## 1:    Iris     0.84     0.80     0.88     0.84     0.89
## 2:    Wine     0.72     0.64     0.70     0.61     0.66
## 3:    COIL     0.59     0.82     0.84     0.91     0.84
## 4: Pendigits  0.64     0.70     0.60     0.77     0.56
##      UMAP-15_NMI
## 1:      0.86
## 2:      0.56
## 3:      0.90
## 4:      0.76

```

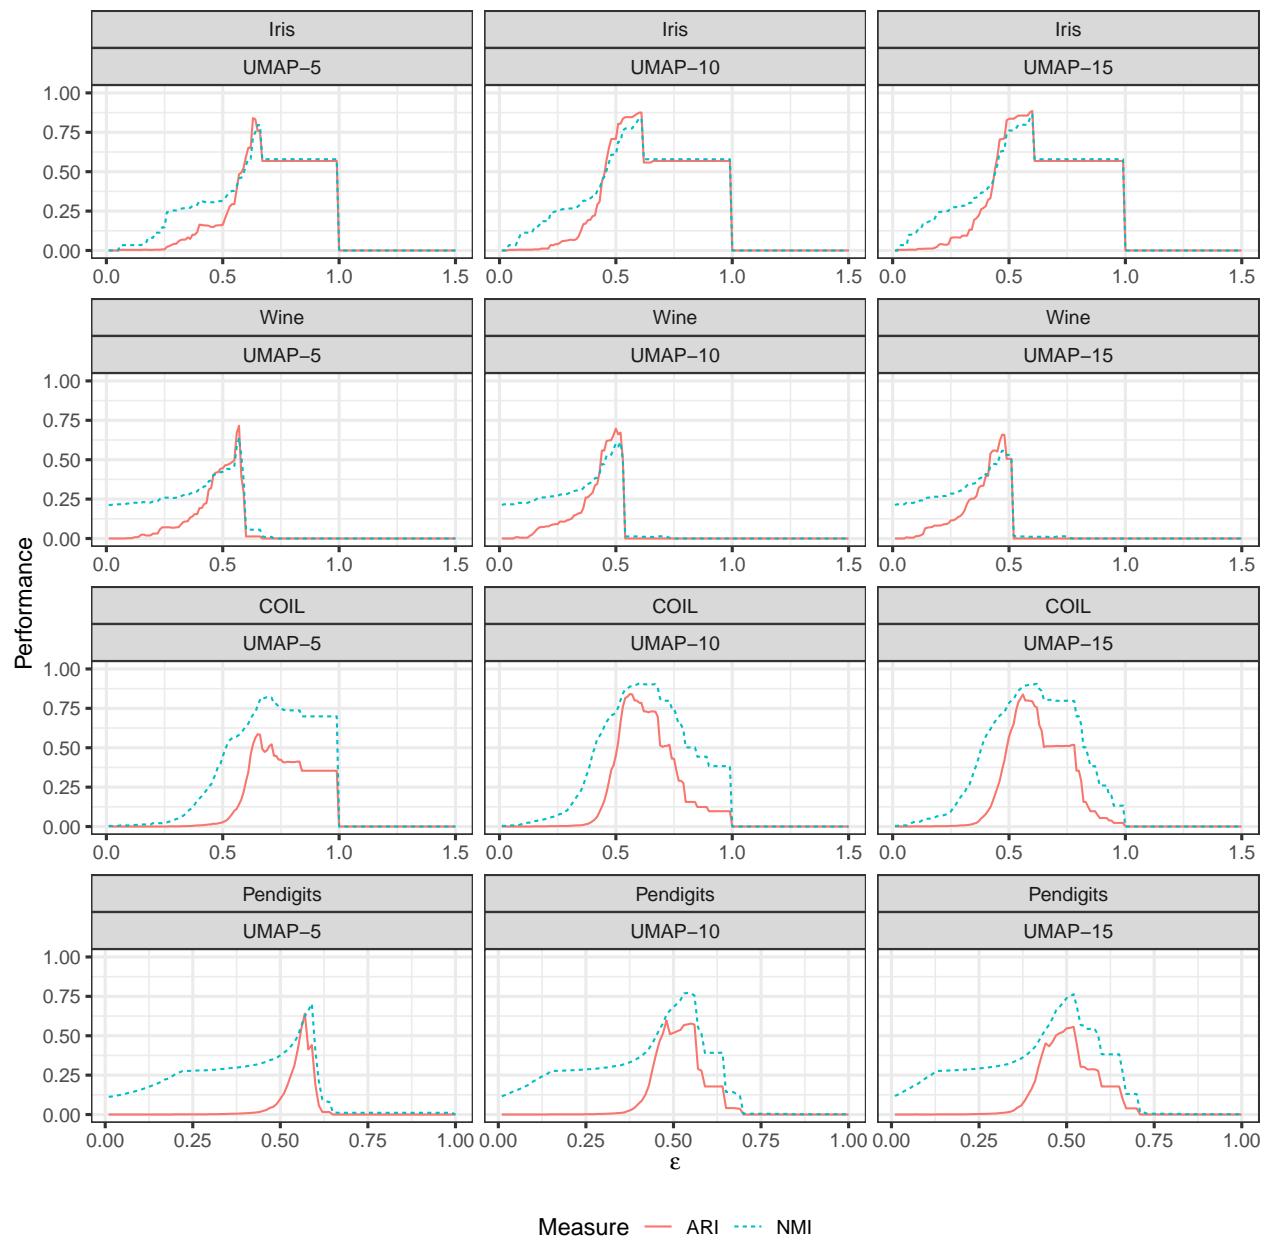

Appendix D

