



Enhancing insights into spending through aggregation with automated document clustering of a large-scale multilingual corpus

Bachelor Thesis

Part of the Examination for the
Bachelor of Science (B.Sc.)
of

International Business Administration and Information Technology
at the University of Business and Society Ludwigshafen

by

Lisa Rebecca Mirjam Schmidt
Sternstraße 93
67063 Ludwigshafen am Rhein

Date of submission: 01. Februar 2018

Company Supervisor: Dr. Karthik Muthuswamy

Academic Supervisor: Prof. Dr. Joachim Melcher

Contents

Abkürzungsverzeichnis	III
List of Figures	IV
1 Programm- bzw. Quellcode	1
1.1 Quellcode	1
1.2 Pseudocode	4
2 Introduction	5
2.1 Motivation	5
2.2 Current situation	5
2.3 Research Questions	6
2.4 Outline	6
3 Objectives and Criteria	7
3.1 Detailed Task Description	7
3.2 Criteria set by SAP SE	7
3.3 Research Model	7
4 Fundamentals	9
4.1 Glossary of Terms	9
4.2 Corporate Environment	9
4.3 Machine Learning	10
4.4 SAP AI Core	12
5 Discussion of Alternatives	13
5.1 Dataset selection	13
5.2 Business Understanding	14
5.3 Data Understanding	14
5.4 Data preparation	15
5.5 Modelling	20
5.6 Evaluation	22
5.7 Deployment	22
6 Theoretical Implementation	23
6.1 Dataset selection	23
6.2 Data Retrieval	23
6.3 Business Understanding	23
6.4 Data Understanding	23

6.5	Data preparation	24
6.6	Modelling	24
6.7	Evaluation	24
6.8	Deployment	24
7	Practical Implementation	25
7.1	Dataset selection	25
7.2	Data preparation	25
7.3	Modelling	27
7.4	Evaluation	27
7.5	Deployment	27
8	Evaluation of the result	28
8.1	Visualization	28
8.2	Measures	28
9	Conclusion and Outlook	29
9.1	Conclusion	29
9.2	Outlook	29
	Literaturverzeichnis	I

Abkürzungsverzeichnis

AI	Artificial Intelligence
AI BUS	SAP AI Business Services
NLP	Natural Language Processing
CRISP-DM	Cross Industry Standard Process for Data Mining
CoE	Center of Excellence
BoW	Bag of Words
TF-IDF	term frequency - inverse document frequency
CBOW	Continuous Bag of Words

List of Figures

3.1	Adjusted CRISP-DM Model	8
5.1	Continuous Bag of Words architecture with sliding window of size $C = 5$. .	19
5.2	Skipgram architecture with sliding window of size $C = 5$	20
5.3	Observations for training with skipgram architecture	21

Listings

1 Introduction

1.1 Motivation

An invoice is a document recording the main information regarding a sales transaction. Usually, an invoice contains the unit cost, a timestamp and the payment terms. Other information, such as shipping terms, shipping adress or payment conditions may also be included.

Apart from their use for tax records, tracking the inventory and legal protection, invoices are essential for a company's external and internal financial reporting (controlling). They are the main source of information for controlling [12], as they record the complete financial history of cash flow [13]. In general, interal financial reporting aims to provide information about the health of a company and supply means for improvement for a company's financials. In turn, this requires an in-depth analysis of spending.

According to [10], more than 4 out of 5 financial departments are "overwhelmed by the high numbers of invoices they are expected to process". Already overwhelmed departments of course struggle with providing information on savings potential. A solution for processing large amounts of invoice data with minimal human interference is desirable. With analysis results, financial advisors have a factual base for recommendations.

1.2 Current situation

An essential part of economic counselling is the assessment of allocated spending for different segments of a company. Spending of a firm usually is written down in invoice documents, which have to be grouped for segments to analyze their costs. While the global market is estimated to comprise 550 billion invoices annually, 90% are exchanged paper-based [9]. With modern technology, these paper-based or digital documents can be transformed into a structured or semi-structured format. According to expert estimates, unstructured data makes up for more than 80% of enterprise data [11]. This data is

not leverageable with traditional data analysis tools, but its value must be harvested for companies to utilize their full potential. A large share of unstructured data found in companies is textual data.

1.3 Research Questions

Which methods exist for clustering large-scale multilingual corpora? Which combinations of feature-selection methods and clustering methods return the most valuable information?

1.4 Outline

This should be written at the end since it's very prone to changes.

2 Objectives and Criteria

2.1 Detailed Task Description

The goal of the thesis is to add value to real business documents by aggregating expenses into clusters of similar expenses. The supplied document dataset consists of 150.000 invoices. The invoices contain different information, for example the vendor, billing amount or a description of the goods. Valuable information for companies would be insight into the different categories of expenses and the corresponding cost. With traditional data analysis methods, the company's controlling departments cannot identify which expenses are similar in nature (for example logistics costs).

The task is to perform a full data analysis on the supplied dataset. The dataset is to be prepared for processing with established methods. An evaluation for different means of feature extraction, machine learning, model evaluation and visualization should be performed. With the evaluation a complete flow for the data processing should be presented. The result should be an added value to the dataset in the form of aggregated expenses.

2.2 Criteria set by SAP SE

none?

2.3 Research Model

To solve the task described in chapter 1.2, this paper employs the Cross Industry Standard Process for Data Mining (CRISP-DM) [4]. This model puts forward a structure for conducting data mining projects. CRISP-DM was developed in 1996 by three companies, which are now the partners of the CRISP-DM consortium: NCR, DaimlerChrysler AG and SPSS Inc.

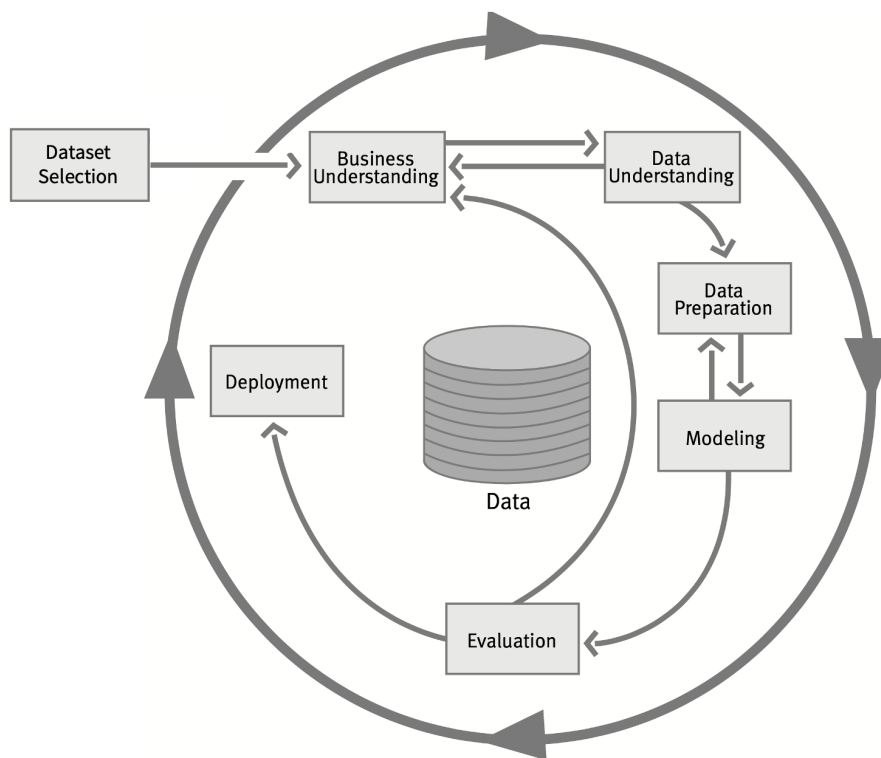


Figure 2.1: Adjusted CRISP-DM Model

Classically, the reference model consists of six phases: Business Understanding, Data Understanding, Data Preparation, Modeling, Evaluation, and Deployment. For this thesis the model was adapted to reflect all tasks encompassed. The phase "Dataset Selection" was added, resulting in a total of seven phases.

Fundamentally, the CRISP-DM model is of circular nature, reflecting the fact that data science projects underly the premise of continuous improvement. After the deployment of one solution, monitoring can give insights which allow for deeper business understanding, triggering the start of a new circuit of the model.

- what does the model describe?
- what are the steps?
- why do I use this model?
- Which alterations were made?

3 Fundamentals

3.1 Glossary of Terms

- SAP SE
- SAP Leonardo MLF
- SAP AI Core
- SAP AI Launchpad
- AI Foundation

3.2 Corporate Environment

3.2.1 Historical

SAP was founded in 1972 by five ex-IBM employees. The original company name was "Systemanalyse Programmentwicklung", which can be translated to "System analysis and program development". In 1976, a second company, the SAP GmbH was founded, where the acronym SAP denoted "Systems, Applications and Products for data processing" [6]. The SAP GmbH is the company, which is today known as SAP SE.

Data processing being part of the company's name shows the importance of this field to SAP since the beginning of the company history. In 2017 SAP entered the AI business with the SAP Leonardo Machine Learning Foundation [5], and challenged the market for hyped products in machine learning, blockchain, big data and design thinking. The name Leonardo refers to Leonardo Da Vinci, who is renowned for his interdisciplinary innovations [2]. SAP has the goal of driving the digital innovation strategies of customers with the help of SAP Leonardo.

With changes in the underlying hyperscalers for Leonardo, and evolving requirements of customers and partners, SAP adjusted their AI strategy. Two new products were introduced: SAP AI Core and SAP AI Launchpad. Both products are united under the collective name of AI Foundation [5]. With the general availability of AI Foundation in late 2021, SAP Leonardo is officially sunsetted.

- What comes in the future?
- how much does SAP earn with AI?

3.2.2 Organizational

SAP SE has an executive board consisting of seven members, each attributed to one area. The Artificial Intelligence (AI) division falls into the responsibility of Jürgen Müller, Chief Technology Officer and leader of the board area for technology and innovation [8]. Members of the organizational unit for AI are divided in different teams concerned with development, product success, operations and specific AI-services. Development Teams are organized into Centers of Excellence (CoEs), in which special expertise for designated areas is united. SAP has a team of researchers around the world concerned with state-of-the-art topics, including few-shot learning, sentiment analysis, privacy and fairness [1]. The research teams regularly publish articles on their advancements.

3.2.3 Technological

<https://www.sap.com/products/artificial-intelligence.html>

3.3 Machine Learning

Already Alan Turing understood that for laymen a learning machine can be perceived as a paradox. How can a machine learn, if a human has to define its behavior beforehand? There are three major subfields in the discipline of artificial intelligence that fundamentally explain how a computer can learn how to behave despite predefined behavior.

3.3.1 Supervised Learning

A supervised learning algorithm learns its decision with the help of a data set (input) that also contains the correct decision (output) as information. It is trained with only a part of the entire data set, so that the model can be tested in a later step with the help of unknown data. This way, a statement can be made about the accuracy of the model.

3.3.2 Unsupervised Learning

Unsupervised learning is complementary to supervised learning. All algorithms that fall into the category of unsupervised learning are trained with data that does not contain the correct output (label) as information. Here, the categorization is not constrained by the given data, but decided on by the algorithm.

3.3.3 Reinforcement Learning

The third way in which an algorithm can make better decisions as it gains experience is called reinforcement learning. Reinforcement learning is about letting algorithms solve very complex tasks. The special feature is that there is no defined solution path, but the algorithm is rewarded for goal-oriented behavior and punished for wrong decisions. The definition of goal-oriented behavior has to be put into place by the engineers setting up the training of the model. Real-world tasks are extremely complex, so not all possible solution paths can be calculated and compared to find the optimal path. Parking a car is a routine task for a human after a few hours of driving, but a computer sees only an infinite set of possibilities for turning angles. This problem can be solved by reinforcement learning. The algorithm is rewarded for each parking attempt where the car ends up seeing in the parking space. For the remaining attempts, the algorithm is penalized. Over many thousands of attempts, the reinforcement learning model is trained in this way.

The three major ways of learning even with previously defined behavior can now be implemented by specific models. For example, there are several ways to create and train a model using Unsupervised Learning.

3.3.4 Clustering Algorithms

multinomial, one bad example for a clustering would be the closest 5 docs to each one (this is multilabel)

3.3.5 Natural Language Processing

Natural Language Processing (NLP) is often attributed to the computer science, but after closer examination, NLP is a discipline comprised of linguistics, computer science, artificial intelligence and mathematics [7].

3.4 SAP AI Core

3.4.1 Docker

4 Discussion of Alternatives

For each step in the CRISP-DM process, a multitude of different approaches can be employed. In this chapter, the alternatives are presented and evaluated on the basis of established criteria.

4.1 Dataset selection

The dataset is the fundament of a data-science project. The quality, size and closeness to reality decide the degree to which the findings can be helpful for solving real problems. In this section, a classification for data-science projects is introduced.

	Problem-First	Data-First
Underlying Question	How can a problem be solved?	Which problems can be solved with the solution?
Role of the dataset	Different datasets can be considered for one problem statement.	The dataset is the core of the project, with a new dataset, a new project begins.
Requirements for the dataset	Require a ground truth or established methods for evaluating the goal achievement.	Compared to problem-first projects, larger datasets are required because there is no prior assumption of patterns.
Fixed component	Problem statement	Dataset

The problem-first project type is characterized by a predefined problem statement or research goal. The underlying question is, how a specific or a set of problems can be solved. For the selection of the dataset, this requires that goal achievement can be measured with existing ground truth. In some cases, also other methods such as expert judgements can be sufficient. In a problem-first project, different datasets can and should be considered.

The complementary project type is the data-first project, which describes most data-mining projects. This type is characterized by a more explorative approach, and the goal to find problems and patterns. Here, the dataset is at the core of the project and the fixed aspect of a project. In turn, this means swapping the dataset is the start of a new project.

With the project type as a decisive factor for the dataset explained, the other evaluation criteria for the dataset is described. In the corporate environment two fundamental sources for data exist.

	Internal	External
Source	Internal or customer data, bought or generated	Publicly available, generated or supplied by companies
Relevance	Business-relevant	Anonymized, processed
Value	Relevant to one business	Of general relevance
Availability	Authorization processes in place, no central registries	Ubiquitously available

Firstly, data can be sourced from inside the company. This can include customer data or data generated from observation and monitoring processes inside the company. Data is either directly or very closely related to the company's business. Depending on the solution, it can be of use to customers or it can be utilized inside the company. Internally sourced data is almost exclusively rated confidential, limiting even intra-company access to it. Authorization processes and more than often not existing registries for data may hinder project progress.

Secondly, data can be sourced outside the company. A vast number of online registries for data exist, both with paid and free of charge service offerings. Data sources include real-life data and data generated for educational purposes. Because of its publication, the data is stripped from all parts which could expose confidential information such as corporate secrets. Additionally, data is anonymized and processed to limit the usefulness to potential competitors.

It can be stated, that both sources are suited for different goals.

4.2 Business Understanding

In [4], different methods for business understanding are mentioned. Firstly, a - why did i decide for clustering?

4.3 Data Understanding

- different data exploration tools can be used for the data understanding.

4.4 Data preparation

- transforming json documents into dataframe rows
- removing stopwords from several languages
- removing numbers and interpunction
- tokenization

4.4.1 Data processing and data wrangling

4.4.2 Data cleaning

4.4.3 Feature Extraction and Feature Engineering

The majority of popular ML algorithms require the input of scalar, vector or matrix data. A form of ML models, which work with textual input will be discussed later in this section. But since many algorithms were not designed to work with textual data, a transformation is required before already existing algorithms can be applied. Several methods for representing text as mathematical object will be discussed in the following.

One-hot encoding

Bag of Words Model

Following three documents will be considered to explain the workings of the Bag of Words (BoW) model:

document	content
1	car repair
2	flight ticket processing and ticket reservation
3	parking ticket

A corpus is transformed into the BoW representation in two steps.

Firstly, the vocabulary is determined. The vocabulary is a collection of all words occurring in the corpus. Every word is contained exactly once, regardless of the actual number of occurrences. The vector representation of one document is of the same length as the vocabulary. One document being represented by one vector, a corpus of several documents can be represented as a matrix. The resulting matrix has the size $|D| * |V|$, with $|D|$ being the number of documents in the corpus, and $|V|$ being the size of the vocabulary.

Secondly, for each combination of one document d_i and one word v_j in the vocabulary, the occurrences are counted. The times, how often the specific word is contained in the document is noted in the matrix at location ij .

	and	car	flight	parking	processing	repair	reservation	ticket
car repair	0	1	0	0	0	1	0	0
flight ticket processing and ticket reservation	1	0	1	0	1	0	1	2
parking ticket	0	0	0	1	0	0	0	1

The result of vectorization are three vectors:

$$d_1 = [0, 1, 0, 0, 0, 1, 0, 0]$$

$$d_2 = [1, 0, 1, 0, 1, 0, 1, 2]$$

$$d_3 = [0, 0, 0, 1, 0, 0, 0, 1]$$

This vectorization method can be implemented with ease and in a computationally efficient manner. The BoW model allows for a very intuitive understanding of documents, since texts consisting of the same words are considered topically related.

One of the drawbacks of this method is that no consideration is paid to words being repeated in one document. Additionally, no semantic relationship between words or documents can be inferred. Further, it can be stated, that the BoW representation fails to capture the meaning of synonyms. This becomes obvious with an example: document d_1 and d_3 would be considered to belong into the topic of transportation or automobiles. The BoW representation suggests topical proximity between document d_2 and d_3 , through the shared word "ticket". "Ticket" here is used in both the meaning of an entrance pass (d_2) and in the meaning of a note for a traffic offence (d_3).

To conclude, the BoW model is a straightforward text representation method. Still, it fails to capture several aspects of the natural language.

Tf-Idf

The term frequency - inverse document frequency (TF-IDF) model aims to capture more meaning from the corpus by considering the composition of the whole corpus for the calculation of individual document vectors.

TF-IDF makes two assumptions about natural language:

1 Term Frequency A word t_i which occurs very frequently in one document is considered to describe a text very well. The occurrences of one word in one document is denoted as $\#(t_i)$. One additional consideration needs to be made regarding the document length. In a document of length $|d_2| = 6$ and a document of length $|d_3| = 2$, the word t_i occurring once would be considered equally important to each document. Of course, the word should be considered more important to d_3 , since it accounts for a larger share of the text. The measure resulting from both ideas is the term frequency:

$$TF(t_i, d_j) = \frac{\#(t_i)}{|d_j|} = \frac{\text{occurrences of word } t_i \text{ in document } d_j}{\text{length of } d_j}$$

2 Inverse Document Frequency A word t_i which occurs in a large number of documents does not describe one document well. Words occurring in many documents often are articles or pronouns (stopwords) which do not provide value when inspecting the content of a text. The inverse document frequency is a measure accounting for this fact. The inverse document frequency of a word is the proportion between the number of documents in the corpus and the number of documents containing the word. The logarithm is applied, as the importance of a word does not increase proportionally to the number of occurrences.

$$IDF(t_i) = \log \frac{|D|}{\#(d_{t_i})} = \log \frac{\text{number of documents in corpus } D}{\text{number of documents containing word } t_i}$$

Combining both assumptions, the TF-IDF measure is created:

$$TFIDF(t_i, d_j) = TF(t_i, d_j) * TF(t_i, d_j)$$

For the corpus displayed in the previous section the document vectors calculated with the TF-IDF measure are:

$$d_1 = [0 \ 0.707107 \ 0 \ 0 \ 0 \ 0.707107 \ 0 \ 0] \quad (4.1)$$

$$d_2 = [0.39798 \ 0 \ 0.39798 \ 0 \ 0.397980 \ 0.397980.605349] \quad (4.2)$$

$$d_1 = [0 \ 0.707107 \ 0 \ 0 \ 0 \ 0.707107 \ 0 \ 0] \ d_2 = [0.39798 \ 0 \ 0.39798 \ 0 \ 0.397980 \ 0.397980.605349] \ d_3 = [0 \ 0 \ 0 \ 0.707107 \ 0 \ 0 \ 0.707107 \ 0]$$

The TF-IDF measure corrects some of the pitfalls of the BoW model. It certainly is less vulnerable to skewing by stopwords as words are ranked by importance to each document and the all over corpus.

Just as the BoW representation, TF-IDF suffers from high-dimensionality. The vectors contain one element for each word in the vocabulary, resulting in vectors which are inefficient to handle. Also, TF-IDF fails to represent the topical relationship between d_1 and d_3 .

Word Embeddings

Again, the most desirable vector representation consists of dense low-dimensional vectors which are close to each other if the words are considered similar. The lack of "understanding" of related words, and the problem of high-dimensionality is corrected with the third presented option: Word Embeddings.

An embedding is a translation of a word into a high-quality vector. The model does so, as it has been trained on a large set of natural language data. Popular embeddings include word2vec, fasttext and doc2vec. Word2Vec is the original model and will be discussed in the following.

The word2vec model assumes that words appearing in a similar context are also similar to each other. There are two options for the input and output: the word w_i and its context c_i .

document

1	The car repair was expensive.
2	My secretary did the ticket reservation.
3	I got a parking ticket yesterday.

Continuous Bag of Words With the CBOW architecture the word2vec model is trained to predict a word using the context as input. A sliding window of a predefined size is moved along the text.

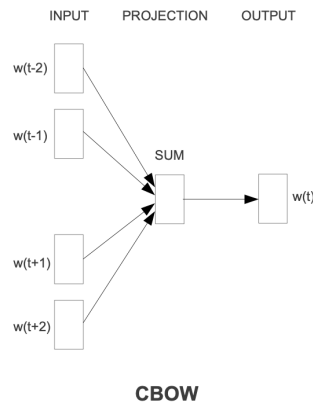


Figure 4.1: Continuous Bag of Words architecture with sliding window of size $C = 5$

Skipgram With the skipgram architecture the word2vec model is trained to predict the context of the input word.

Negative Sampling Word2Vec uses either SKIPGram or CBOW.

Word2vec can utilize two models for selecting observations: either skipgram or CBOW.

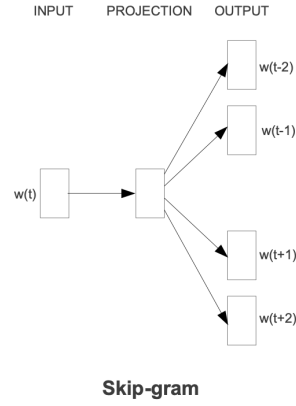


Figure 4.2: Skipgram architecture
with sliding window of size $C = 5$

4.5 Modelling

The objective of this thesis is the grouping of expenses with the methods of NLP. Grouping, or clustering, is the practise of sorting data points into groups in such a way that the similarity inside a group (intra-cluster similarity) is high while the similarity between clusters (inter-cluster similarity) is low. The definition of similarity as well as different clustering algorithms are presented and contrasted in the following sections.

4.5.1 Similarity and distance measures

A distance measure is a quantification of how near objects in space are. Distance measures can be defined for spaces of arbitrary numbers of dimensions.

Euclidean Distance The most intuitive and popular distance measure is the euclidean distance. This measure is applicable for vector spaces F^n with $n \in \mathbb{N}_0$. For low-dimensional applications, this distance works well and shows great results. Euclidean distance can be calculated in a highly efficient manner, even for n dimensions. This suggests, that euclidean distance is particularly suitable for high-dimensional data. Unfortunately, euclidean distance falls victim to the curse of dimensionality. In [3] it is proven that with increasing dimensions, the distance between data points approaches an uniform

input	target
secretary	my
secretary	did
did	secreatary
did	the
the	did
the	ticket
ticket	the
ticket	reservation

Figure 4.3: Observations for training with skipgram architecture

value for all datapoints. This effect could be demonstrated for spaces with as little as ten dimensions. Therefore, it can be said that euclidean distance is not suitable for high-dimensional data. With vectors in NLP ranging from 100 to 800 dimensions, this distance measure is not suitable.

Dot Product

Cosine Distance

4.5.2 K-Means with Euclidean Distance

4.6 Evaluation

4.6.1 Elbow Diagram

4.6.2 average silhouette method

4.6.3 gap statistic

4.6.4 Visualization

PCA

T-SNE

4.7 Deployment


5 Theoretical Implementation

5.1 Dataset selection

5.2 Data Retrieval

5.3 Business Understanding

5.4 Data Understanding

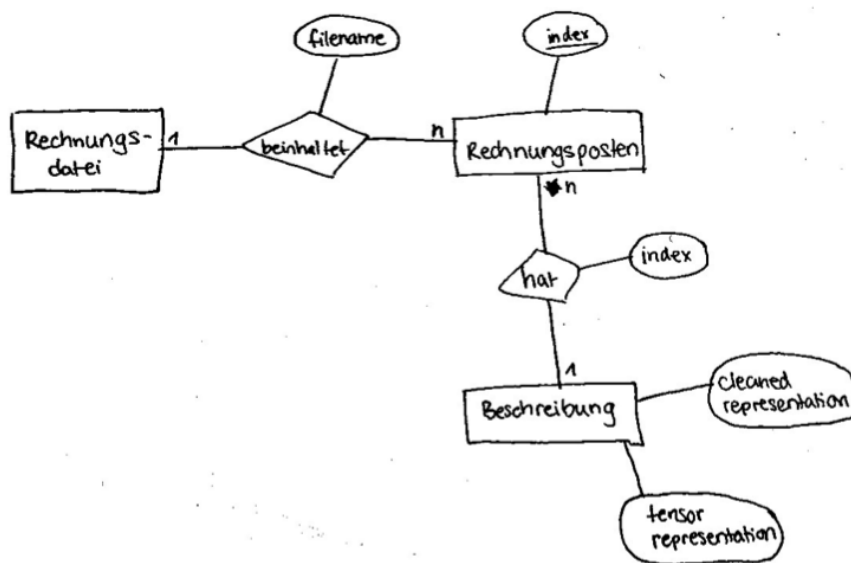

5.5 Data preparation

5.5.1 Data processing and data wrangling

5.5.2 Data cleaning

5.5.3 Feature Extraction and Feature Engineering

5.6 Modelling

5.7 Evaluation

5.7.1 Visualization

5.8 Deployment

6 Practical Implementation

6.1 Dataset selection

6.2 Data preparation

6.2.1 Data processing and data wrangling

```
1 {
2   "$id": "https://example.com/arrays.schema.json",
3   "$schema": "https://json-schema.org/draft/2020-12/schema",
4   "description": "A representation of information extracted ↵
      ↳ from invoices.",
5   "type": "object",
6   "properties": {
7     "annotations": {
8       "type": "array",
9       "items": { "$ref": "#/$defs/annot" }
10    }
11  },
12  "$defs": {
13    "annot": {
14      "type": "object",
15      "required": [ "label", "text" ],
16      "properties": {
17        "label": {
18          "type": "string",
19          "description": "The identifier of the extracted ↵
              ↳ information."
20        },
21        "text": {
22          "type": "string",
```

```
23         "description": "The value of the extracted ↵  
           ↵ information."
```

Listing 6.1: Algorithmus zum Schätzen einer Zahl in Python

6.2.2 Data cleaning

6.2.3 Considerations of Space and Time Complexity


The dataset consists of over 150.000 invoices, and in those invoices, over 350.000 items are listed. With hardware-limitation in place, an optimized approach for storing and processing the data is required. Several considerations for speeding up processing time and reducing storage space can be made. In the following, the observations are explained and approaches for improvement are given.

Duplicates and space complexity

Investigation shows, there are only 79.741 unique descriptions for the listed items. By saving only the unique values, the required space is reduced to less than one fourth compared to before. Additionally, this step is required by most machine learning models, as duplicate input values can skew the outcome. The model is chosen later, so this processing step leaves the model selection more open to different kinds of learning algorithms.

Reconstructing Relationships and time complexity of searching

After the deletion of duplicate descriptions (documents in the corpus), the

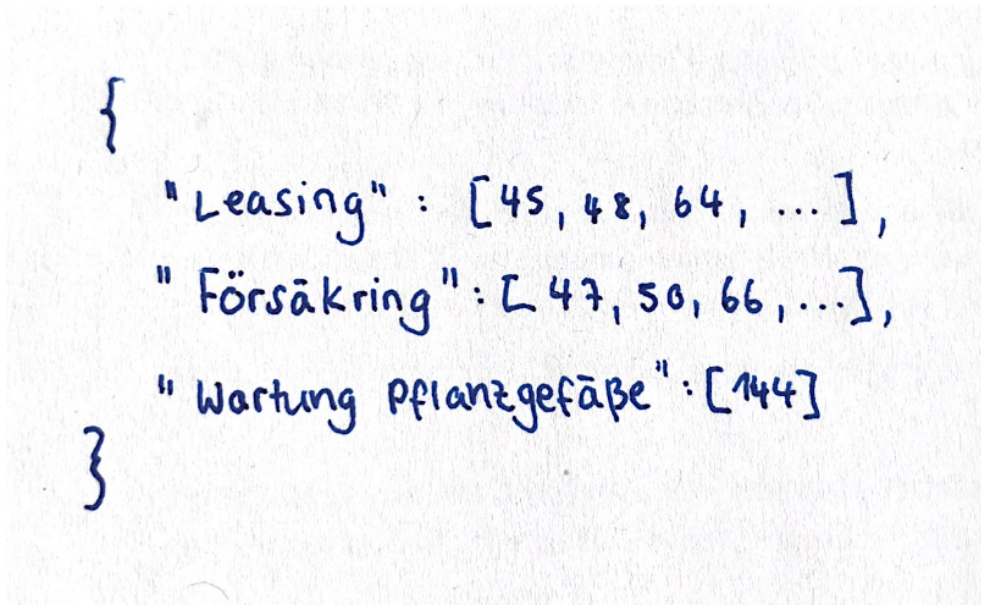

A photograph of a piece of paper with handwritten text in blue ink. The text is structured like a JSON object, with curly braces and key-value pairs. The keys are in quotes and the values are arrays of numbers. The handwriting is slightly cursive and the paper has a textured, off-white appearance.

```
{  
  "Leasing" : [45, 48, 64, ...],  
  "Försäkring" : [47, 50, 66, ...],  
  "Vårdning pflanzgefäße" : [144]  
}
```

6.2.4 Feature Extraction and Feature Engineering

6.3 Modelling

6.4 Evaluation

6.4.1 Visualization

6.5 Deployment

7 Evaluation of the result

7.1 Visualization

7.2 Measures

8 Conclusion and Outlook

8.1 Conclusion

8.2 Outlook

Literaturverzeichnis

- [1] *AI Overview Research*. <https://www.sap.com/products/artificial-intelligence/research.html>.
- [2] Andreas Schmitz. *Was ist SAP Leonardo?* 07/2017.
- [3] Beyer, K. et al. “When Is “Nearest Neighbor” Meaningful?” In: (), p. 19.
- [4] Chapman, P. et al. “CRISP-DM 1.0: Step-by-step Data Mining Guide”. In: 2000.
- [5] Daniel Rutschmann. *The Journey from SAP Leonardo Machine Learning Foundation to SAP AI Core and SAP AI Launchpad*. <https://blogs.sap.com/2021/10/11/the-journey-from-sap-leonardo-machine-learning-foundation-to-sap-ai-core-and-sap-ai-launchpad/>. 10/2021.
- [6] *Geschichte Der SAP*. <https://www.sap.com/germany/about/company/history/1972-1980.html>.
- [7] Gobinda G. Chowdhury. “Natural Language Processing”. In: *Annual Review of Information Science and Technology* 37.1 (01/2003), pp. 51–89.
- [8] *Juergen Mueller Biography*. <https://www.sap.com/about/company/leadership/juergen-mueller.html>. Company Website.
- [9] Koch, B. “The E-Invoicing Journey 2019-2025”. In: (), p. 7.
- [10] SME. *It’s Costing How Much? The Truth about Manual Invoice Processing*. 05/2018.
- [11] *Structured vs Unstructured Data 101: Top Guide*. <https://www.datamation.com/big-data/structured-vs-unstructured-data/>. 05/2021.
- [12] *Understanding Invoices*. <https://www.investopedia.com/terms/i/invoice.asp>.
- [13] *What Is the Purpose of an Invoice? / Invoicing Tips for Small Business*. <https://www.freshbooks.co.uk/do-invoices-work>.