



# WORKSHOP : R SHINY

By: Hiba Ben Aribi

# WORKSHOP




GitHub Repository :

- [https://bit.ly/RShiny\\_Workshop](https://bit.ly/RShiny_Workshop)

Or

- [https://github.com/HibaBenAribi/RShiny\\_Workshop](https://github.com/HibaBenAribi/RShiny_Workshop)

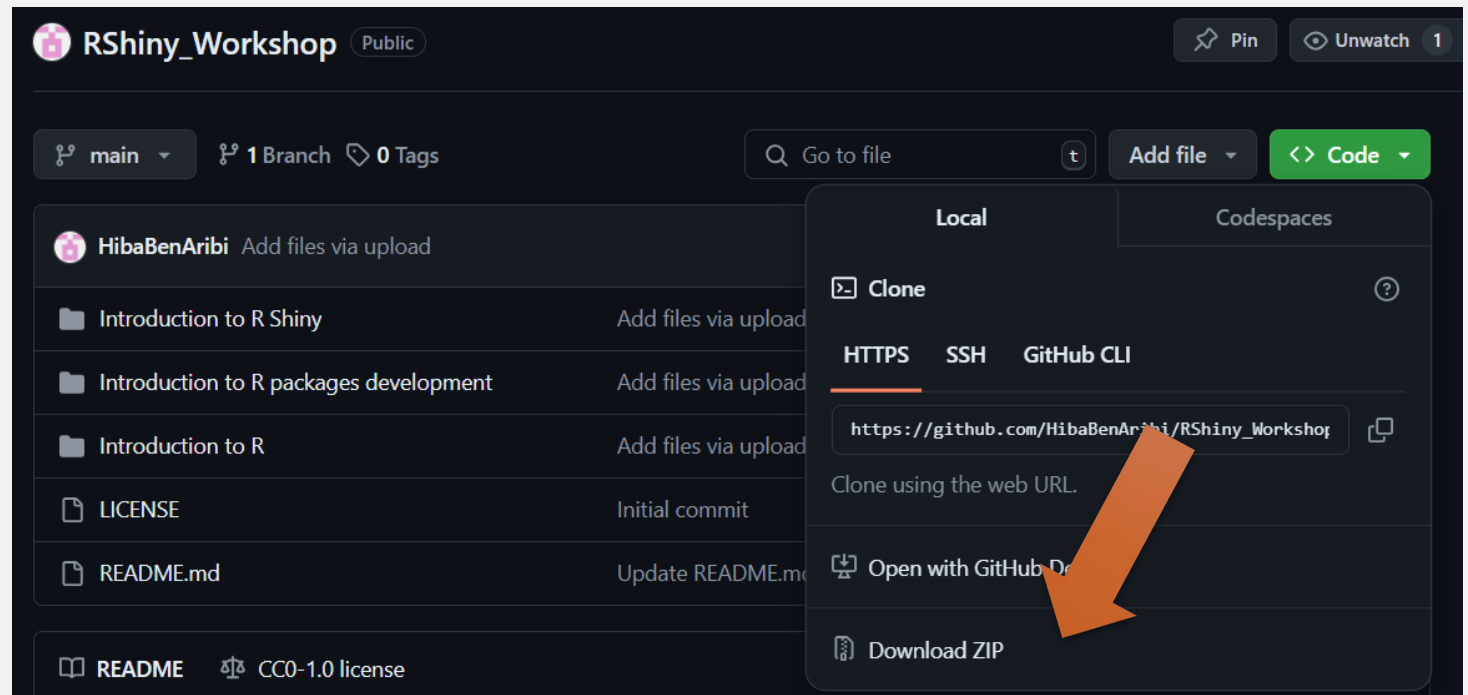



# REQUIREMENTS

Files

main

Go to file

Introduction to R Shiny

Introduction to R packages devel...

Introduction to R

source data

Coding\_with\_R.R

Gene\_expression\_analysis\_with\_...

Gene\_expression\_volcano\_plot\_...

Gene\_ontology\_analysis\_with\_R...

Install R and R Studio.md

LICENSE

README.md

RShiny\_Workshop / Introduction to R / Install R and R Studio.md

HibaBenAribi Add files via upload

Preview Code Blame 25 lines (12 loc) · 868 Bytes Code 55% faster with GitHub Copilot

## Install R and R Studio

Install the latest version of R if your computer does not have it:

1. Go to This Website : <https://posit.co/download/rstudio-desktop/>

posit

PRODUCTS

SOLUTIONS

LEARN & SUPPORT

# 1: Install R

RStudio requires R 3.6.0+. Choose a version of R that matches your computer's operating system.

DOWNLOAD AND INSTALL R



# REQUIREMENTS

Files

main

Go to file

Introduction to R Shiny

Introduction to R packages devel...

Introduction to R

source data

Coding\_with\_R.R

Gene\_expression\_analysis\_with\_...

Gene\_expression\_volcano\_plot\_...

Gene\_ontology\_analysis\_with\_R...

Install R and R Studio.md

LICENSE

README.md

RShiny\_Workshop / Introduction to R / Coding\_with\_R.R

HibaBenAribi Add files via upload


Code

Blame

113 lines (91 loc) · 1.86 KB

Code 55% faster with GitHub Copilot

```
1 # Install a library
2 install.packages("package_name")
3 # Call a library
4 library(package_name)
5 #####
6 # Simple math operations
7 # Addition
8 a <- c(1, 0.1)
9 b <- c(2.33, 4)
10 print(a+b)
11
12 #Subtraction
13 a <- 6
14 b <- 8.4
15 print(a-b)
16
```




# SHINY



Shiny is :


- ✓ An R package
- ✓ Allows the creation of web applications
- ✓ With interactive graphical user interfaces
- ✓ Using R instead of JS

# SHINY

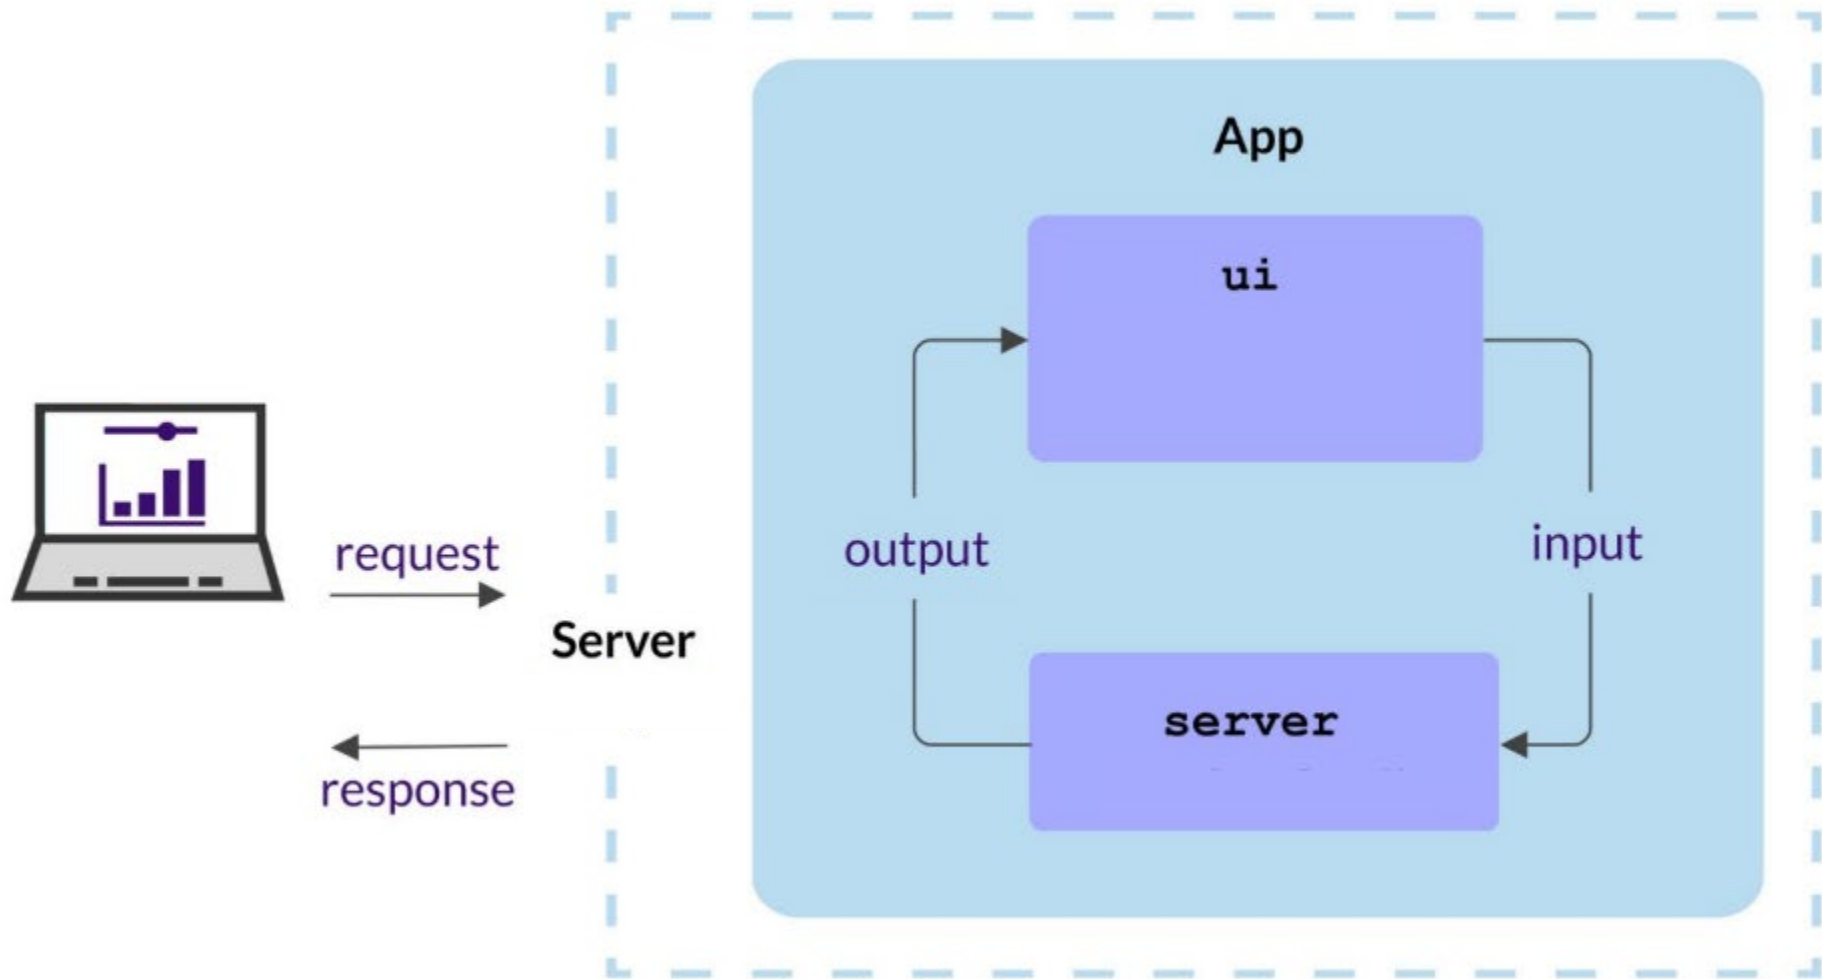

LET'S CREATE A SHINY APP


1. Open R Studio
2. New File
3. Shiny web app

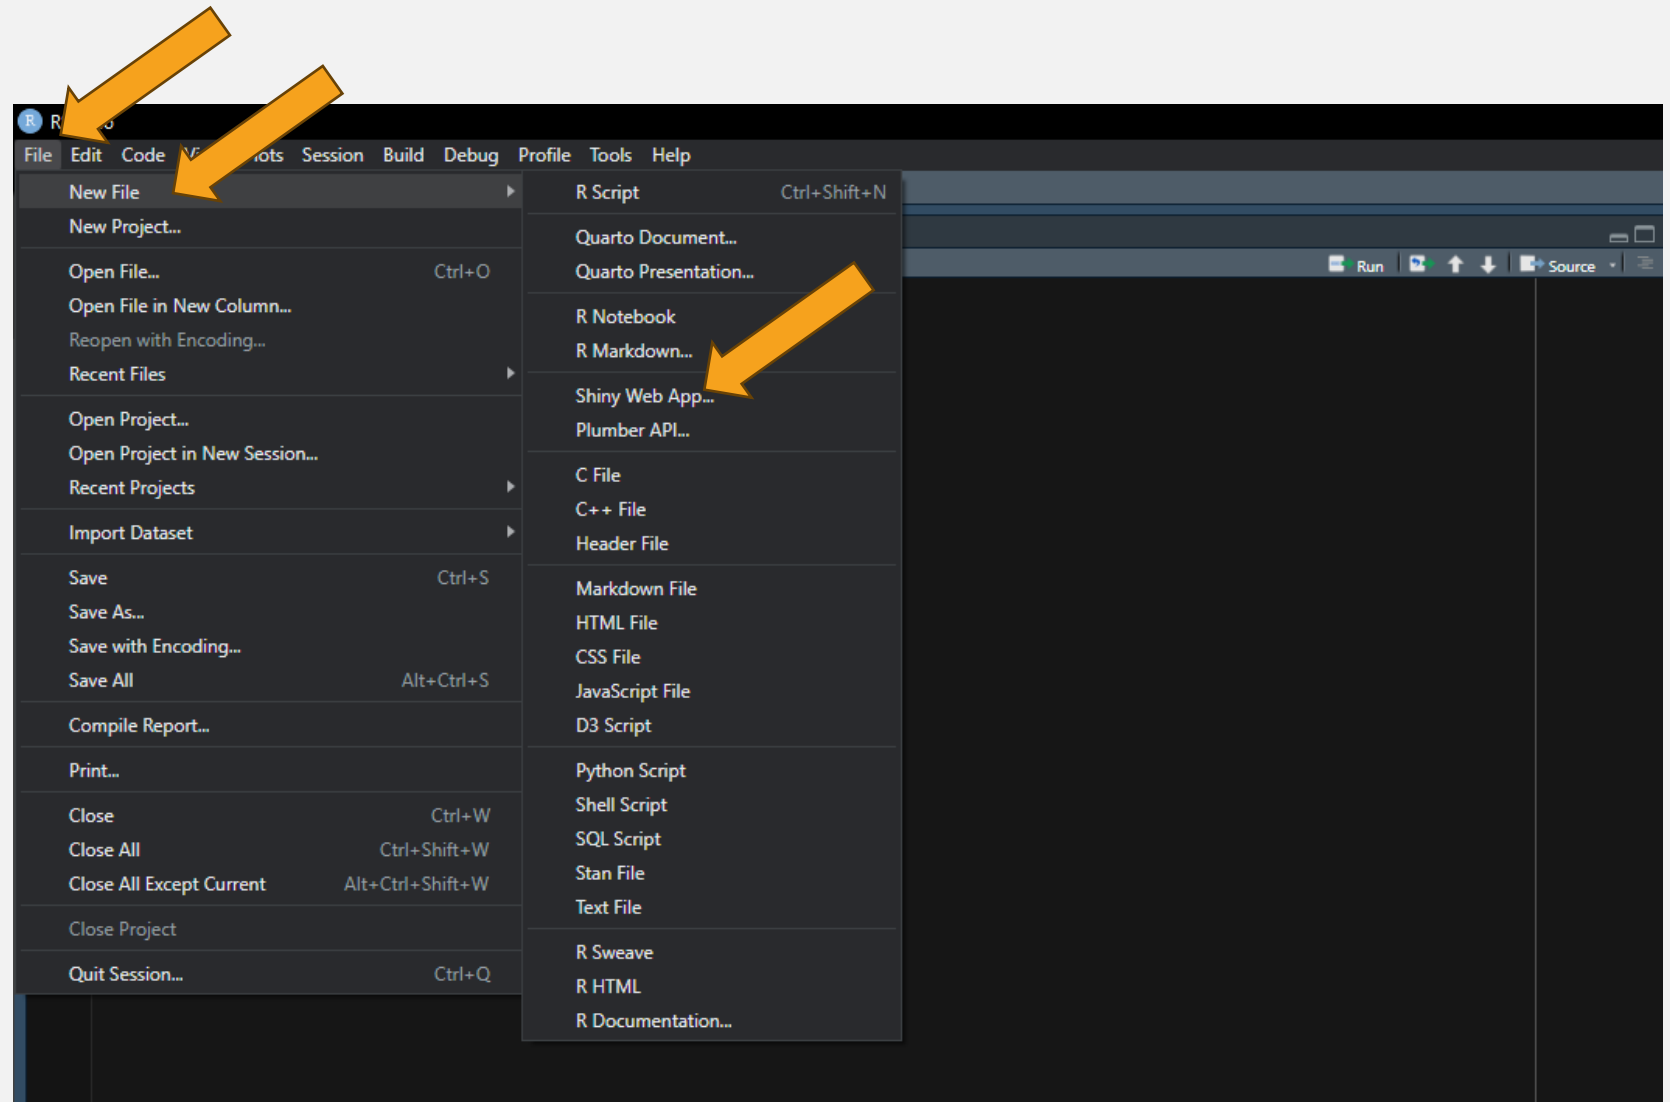



1. Name it
2. Choose single file
3. Define directory
4. Run App

New Shiny Web Application






Application name:

Application type: ☒ Single File (app.R) ☐ Multiple File (ui.R/server.R)

Create within directory:


[? Shiny Web Applications](#)

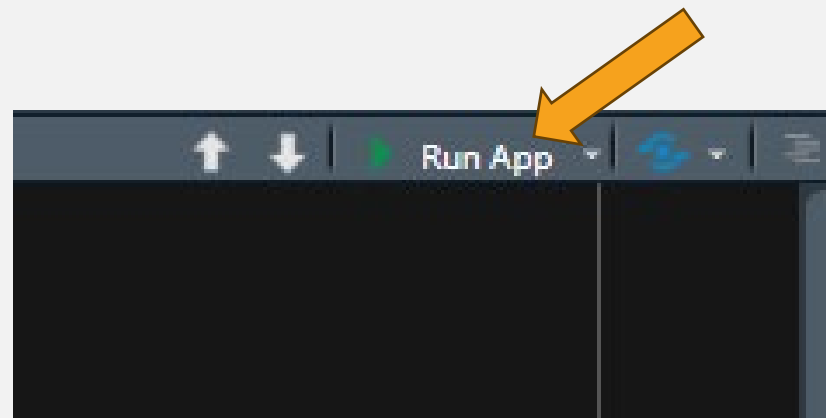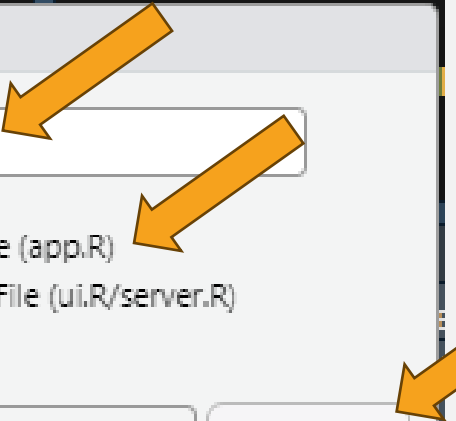

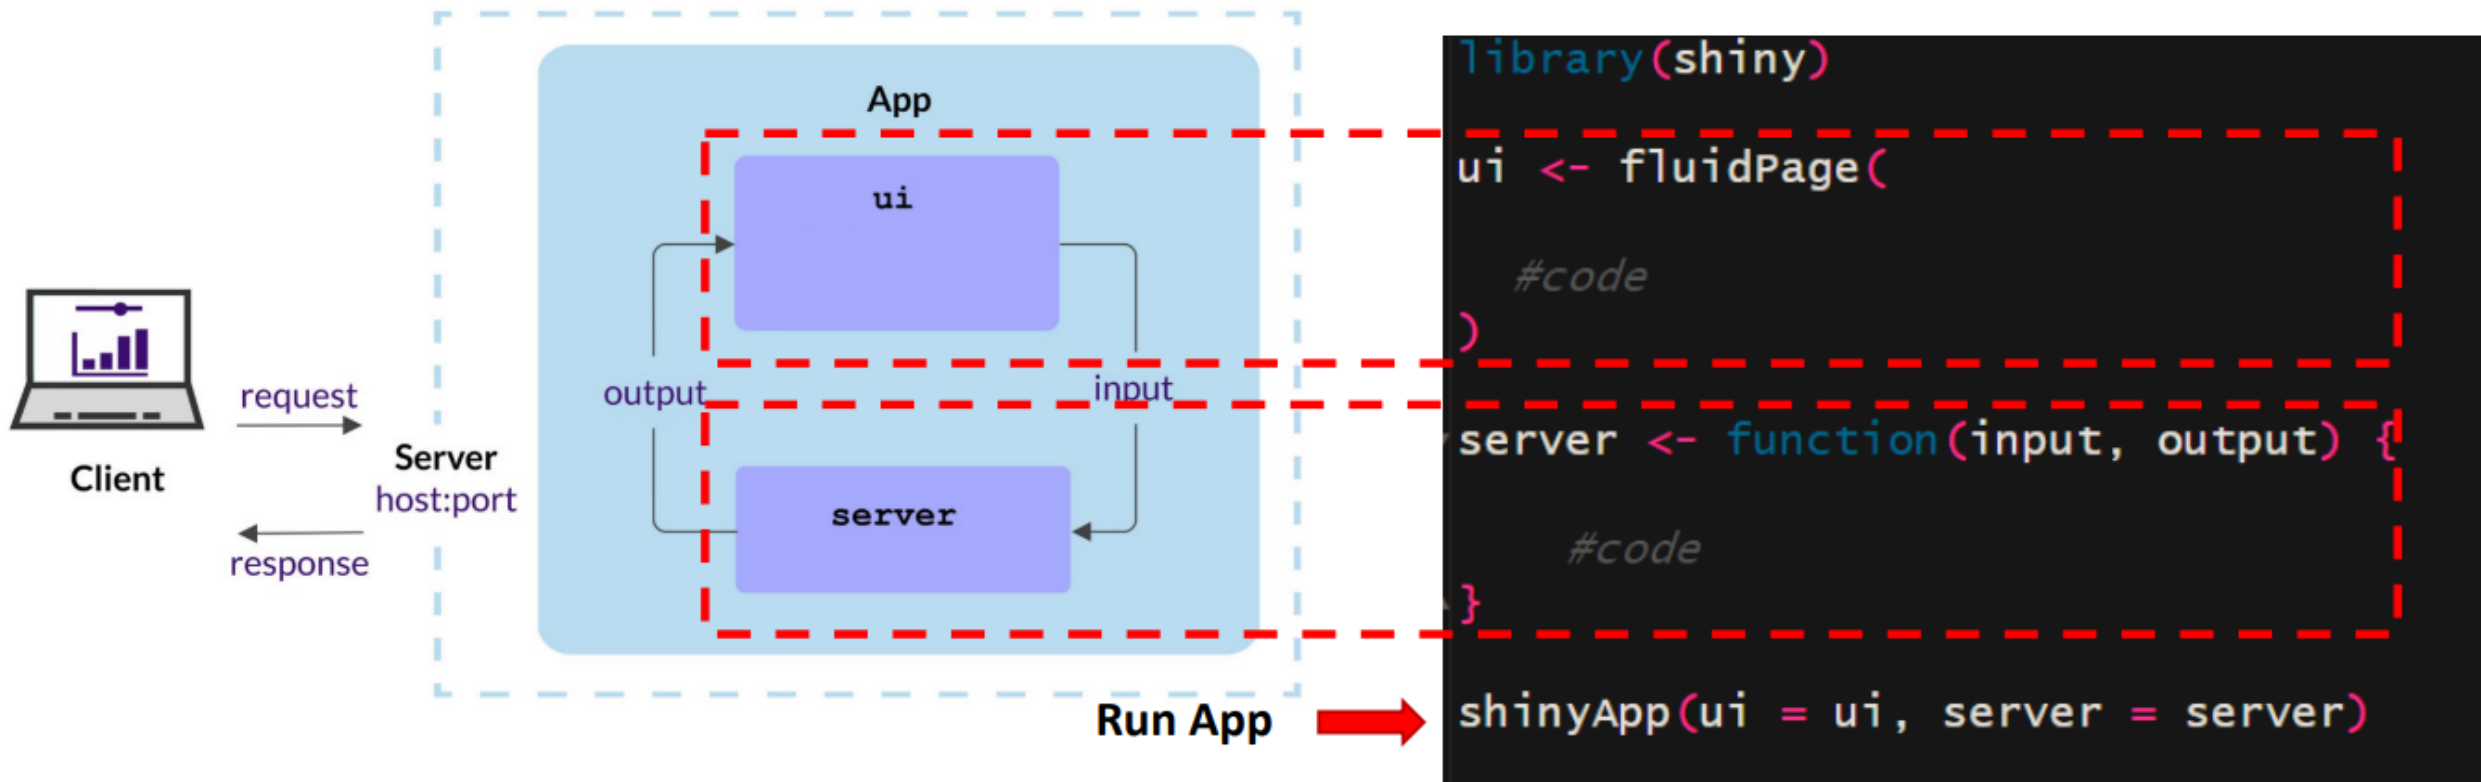

```
library(shiny)

# Define UI
ui <- fluidPage(
  # Application title
  titlePanel("My first shiny application"),
  # Layout
  sidebarLayout(
    #left side
    sidebarPanel(
      h1("left side")
    ),
    #right side
    mainPanel(
      h1("right side")
    )
  )
)
```

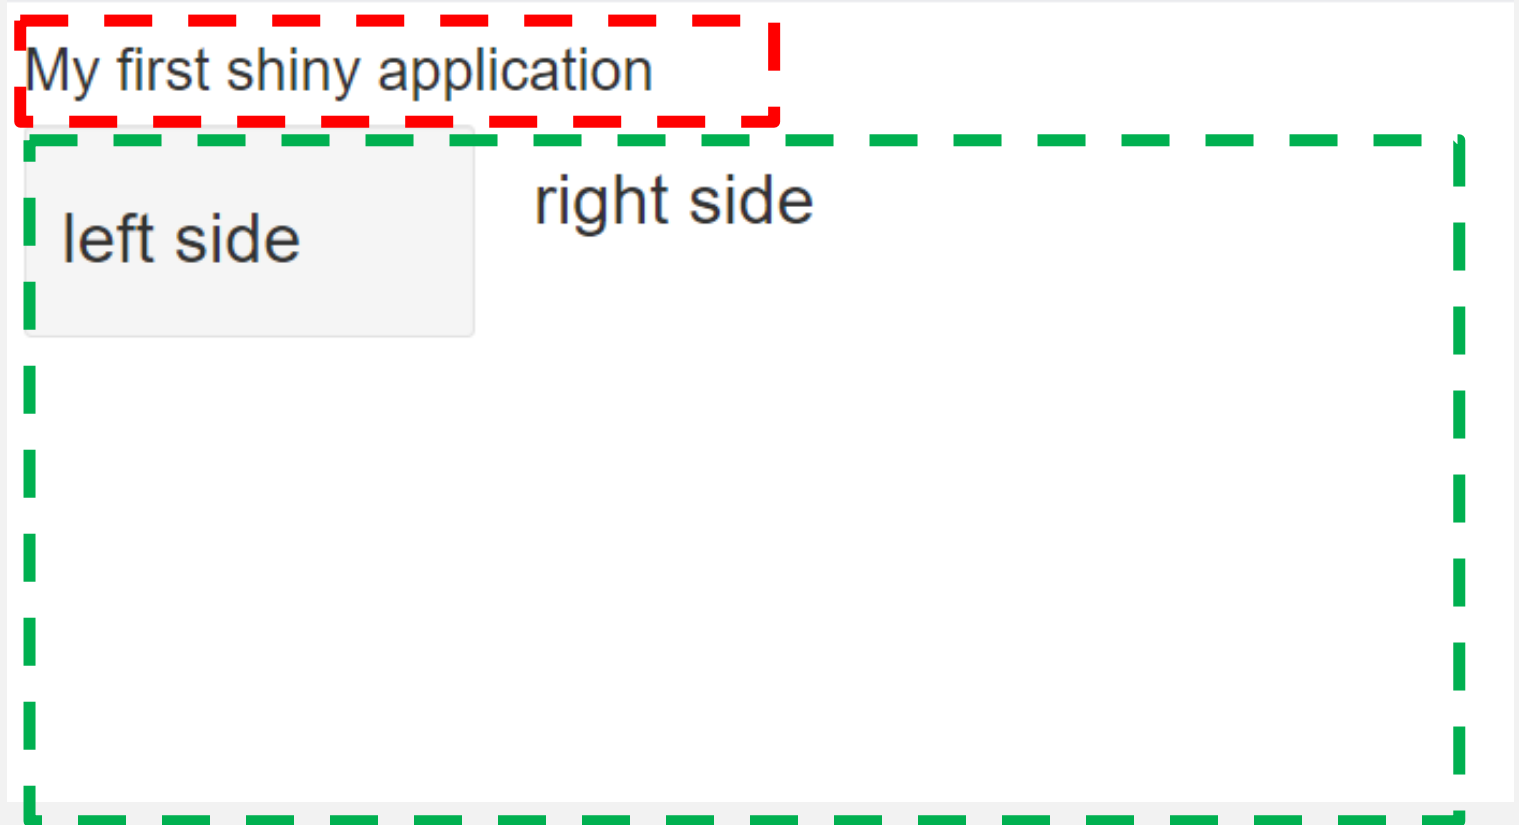

```
library(shiny)

# Define UI
ui <- fluidPage(
  # Application title
  titlePanel("My first shiny application"),
  # Layout
  sidebarLayout(
    #left side
    sidebarPanel(
      h1("left side")
    ),
    #right side
    mainPanel(
      h1("right side")
    )
  )
)
```

## My first shiny application

left side

right side

INTEGRATE OUR CODE

**Files**

main

Go to file

- Introduction to R Shiny
  - source data
    - Code\_gene\_expression\_analysi...
    - code\_gene\_ontology\_analysis.R
    - expression.csv
    - Introduction to R Shiny.md

RShiny\_Workshop / Introduction to R Shiny / source data /



HibaBenAribi Add files via upload

Name	Last commit message
..	
Code_gene_expression_analysis.R	Add files via upload
code_gene_ontology_analysis.R	Add files via upload
expression.csv	Add files via upload

```
1 #  
2 library(readr)  
3 library(dplyr)  
4 library(ggplot2)  
5  
6 # import data  
7 expression <- read.csv("source data/expression.csv")  
8  
9 # define filter parameter  
10 deg_pval <- 0.05 # max p value to define DEGs  
11 deg_logFC <- 2 # min logFC value  
12  
13 # gene expression analysis  
14 expression$diffexpressed <- "Not Significant"  
15 expression$diffexpressed[expression$log2FoldChange > deg_logFC & expression$pvalue < deg_pval] <- "Upregulated genes"  
16 expression$diffexpressed[expression$log2FoldChange < -deg_logFC & expression$pvalue < deg_pval] <- "Downregulated genes"  
17  
18  
19 # Visualize the results as a volcano plot  
20 ggplot(data=expression, aes(x=log2FoldChange, y=-log10(pvalue), col=diffexpressed)) +  
21   geom_point() + theme_minimal() + theme(text = element_text(size = 15))
```


**Call Libraries**

**Inputs**

**df manipulation**

**Create plot**

# INPUTS

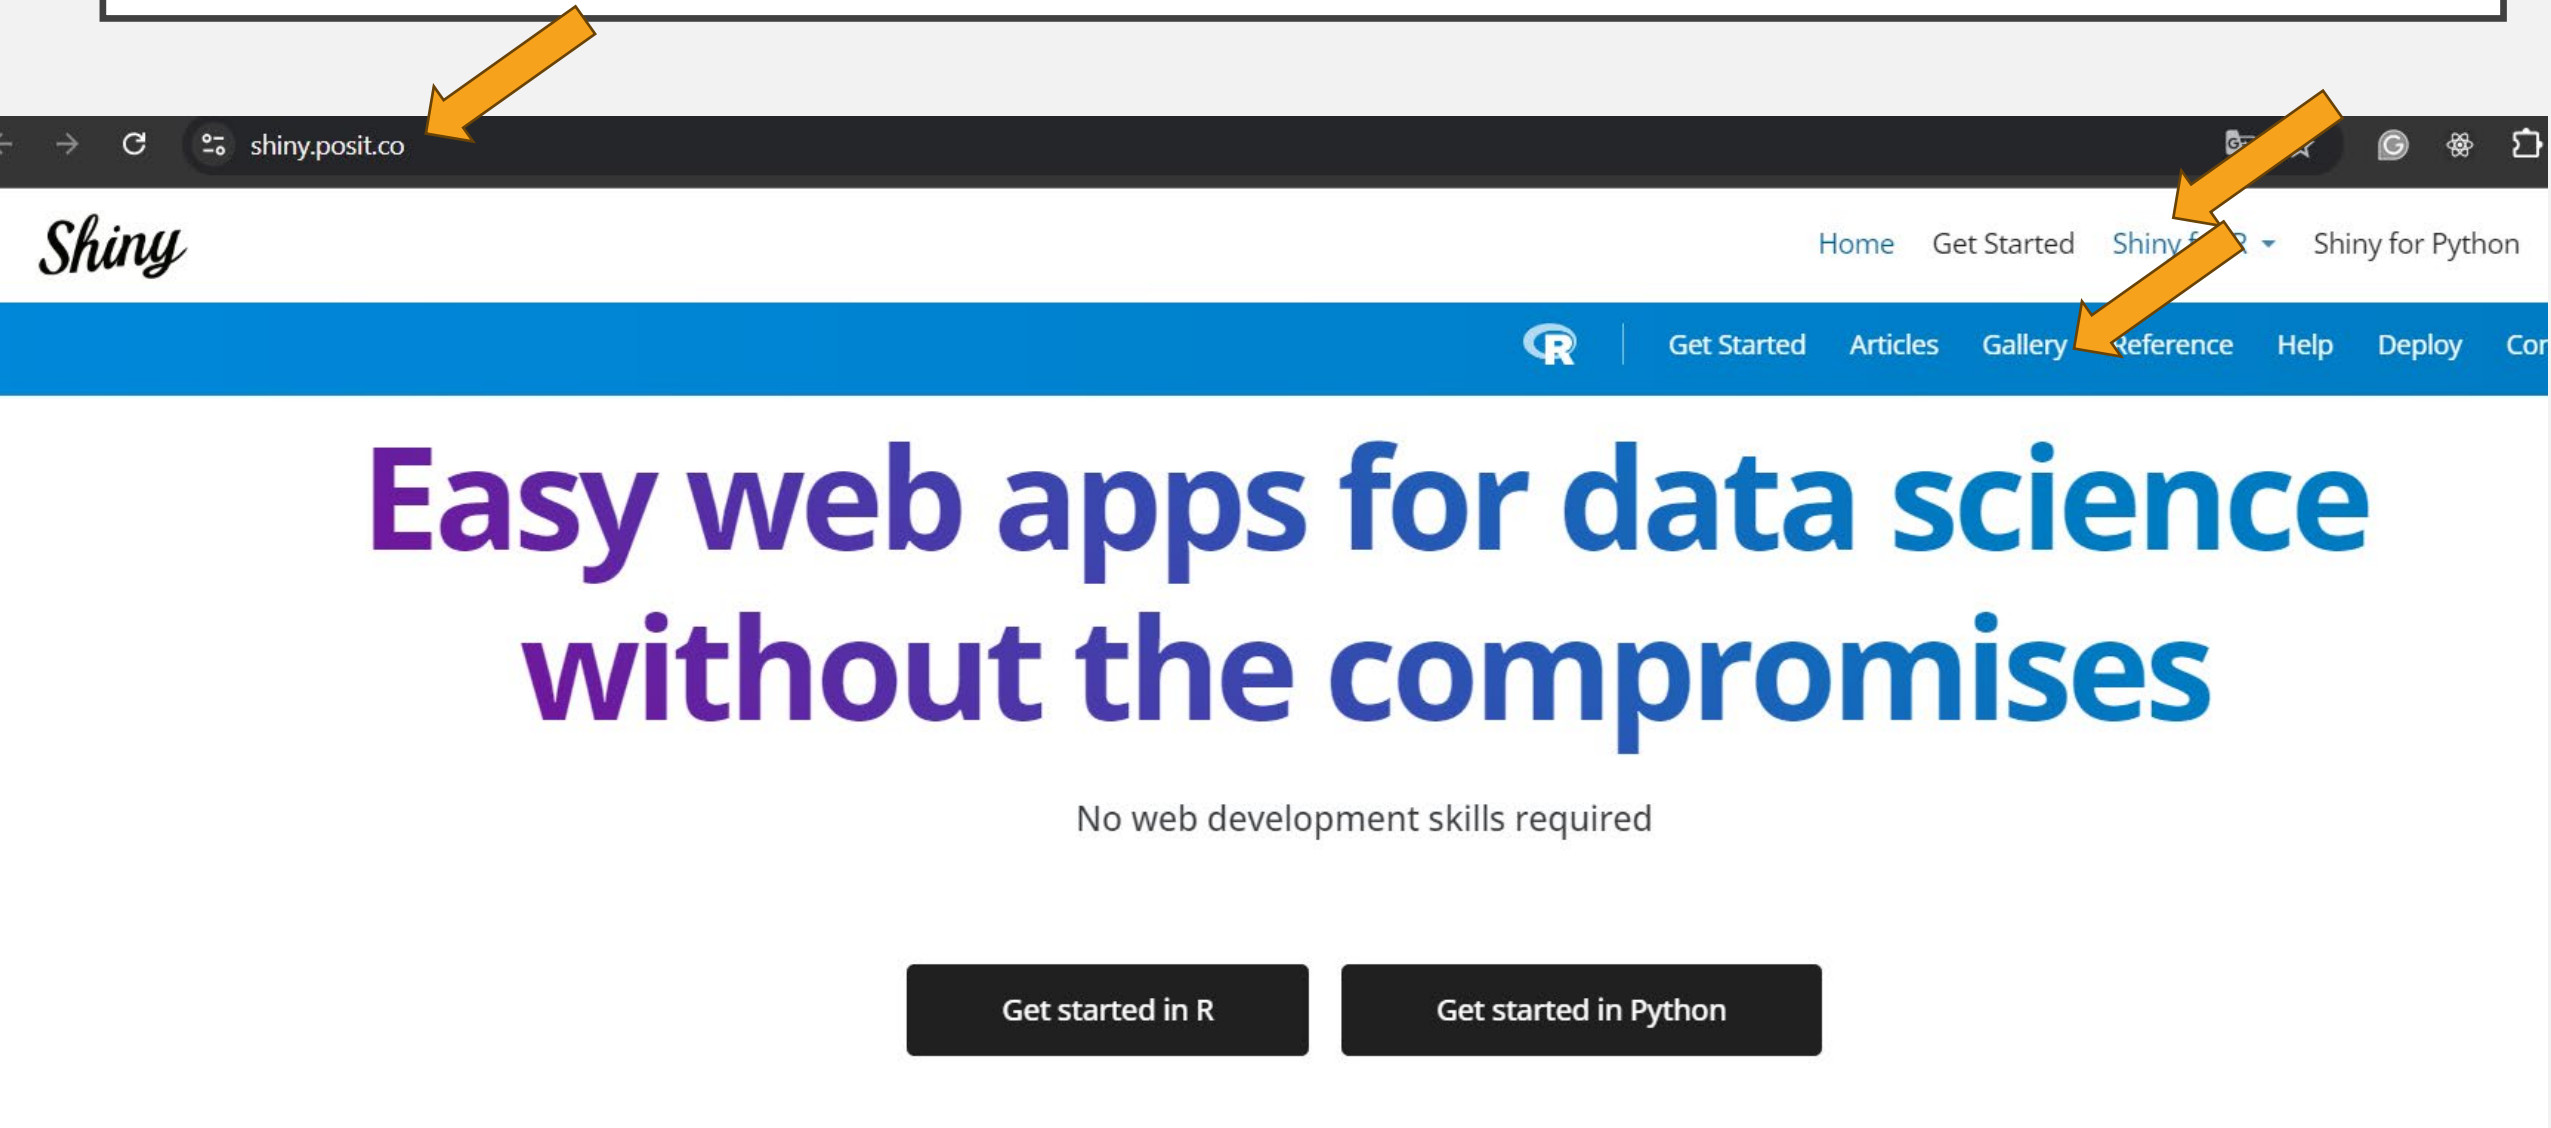

The image is a screenshot of the Shiny website (shiny.posit.co) with several annotations. A large white box labeled "INPUTS" is at the top. An orange arrow points from this box to the browser's address bar. Another orange arrow points from the top right of the page to the "Shiny for R" link in the navigation bar. A third orange arrow points from the "Shiny for R" link to the "Reference" link in the same bar. The website's main content features the Shiny logo, a navigation bar with links like "Home", "Get Started", "Shiny for R", and "Shiny for Python", and a large headline: "Easy web apps for data science without the compromises". Below the headline is the text "No web development skills required" and two buttons: "Get started in R" and "Get started in Python".

shiny.posit.co

Shiny

Home Get Started Shiny for R Shiny for Python

Get Started Articles Gallery Reference Help Deploy Contribute

# Easy web apps for data science without the compromises

No web development skills required

Get started in R Get started in Python



### File input

No file selected

### Text input

### Numeric input

### Date input

### Date range

to

### Select box

Choice 1

### Slider range

0

25

75

100

### Slider

0

50

100

### Action button

### Single checkbox

☒ Choice A

### Checkbox group

☒ Choice 1

☐ Choice 2

☐ Choice 3

### Radio buttons

☒ Choice 1

☐ Choice 2

☐ Choice 3

# FILE INPUT


```
library(DT) # package for table management
```

```
sidebarPanel(  
  fileInput('ID', 'Text...'),  
)
```



**Request File Path in UI**

```
server <- function(input, output) {  
  #import file  
  data<- reactive({  
    inFile <- input$data_file  
    df <- read.csv(inFile$datapath, header = TRUE)  
    return(df)  
  })  
}
```



**Read the file in server**

# NUMERIC INPUTS


## Request File Path in UI

```
sidebarPanel(  
  # Numeric input  
  numericInput("ID", label = h3("Text"), value = Default_value),  
  # slider input  
  sliderInput("ID", label = h3("Text"), min = number, max = number, value = Default_value)  
)
```

Numeric input

1

Slider



```
value <- input$ID
```

Call value in server

## TABLES / PLOTS

### In UI

```
DTOutput('table_name')
```

```
plotOutput("plot_name")
```

### In Server

```
output$table_name <- renderDT({  
  #code  
})
```


```
output$plot_name <- renderPlot({  
  #code  
})
```

# CUSTOMIZE UI

C O L U M N  X 12	ROW X 12

# CUSTOMIZE UI

RShiny\_Workshop / Introduction to R Shiny / Introduction to R Shiny.md



## Resources to Customize the UI

<https://shiny.posit.co/r/getstarted/build-an-app/customizing-ui/theming.html>

<https://shiny.posit.co/r/articles/build/dashboards/>

[https://rstudio.github.io/shinydashboard/get\\_started.html](https://rstudio.github.io/shinydashboard/get_started.html)

<https://daattali.com/shiny/shinycssloaders-demo/>

<https://github.com/daattali/shinycssloaders>

DEPLOYMENT

# SHINY APP DEPLOYMENT

Shiny could be shared as:

- ✓ R code
- ✓ Host it on <https://www.shinyapps.io/>





The screenshot shows the pricing page for shinyapps.io by Posit. The page has a navigation bar with links for Home, Features, Pricing, Support, and a Log In button. Below the navigation bar, there are five pricing tiers displayed in cards. The 'BASIC' tier is highlighted with a blue background. Each card lists the tier name, the monthly price, the annual price in parentheses, and a brief description of the tier's features.


Tier	Monthly Price	Annual Price	Description
FREE	\$0 /month		New to Shiny? Deploy your applications for FREE.
STARTER	\$13 /month	( or \$145/year )	More applications. More active hours!
BASIC	\$49 /month	( or \$550/year )	Take your users to the next level!
STANDARD	\$119 /month	( or \$1,330/year )	Password protection? Authenticate your users!
PROFESSIONAL	\$349 /month	( or \$3,860/year )	Professional has it all! Personalize your domains.

- ✓ Host on private server
- ✓ Implement as a function in an R package



# R PACKAGE DEVELOPMENT

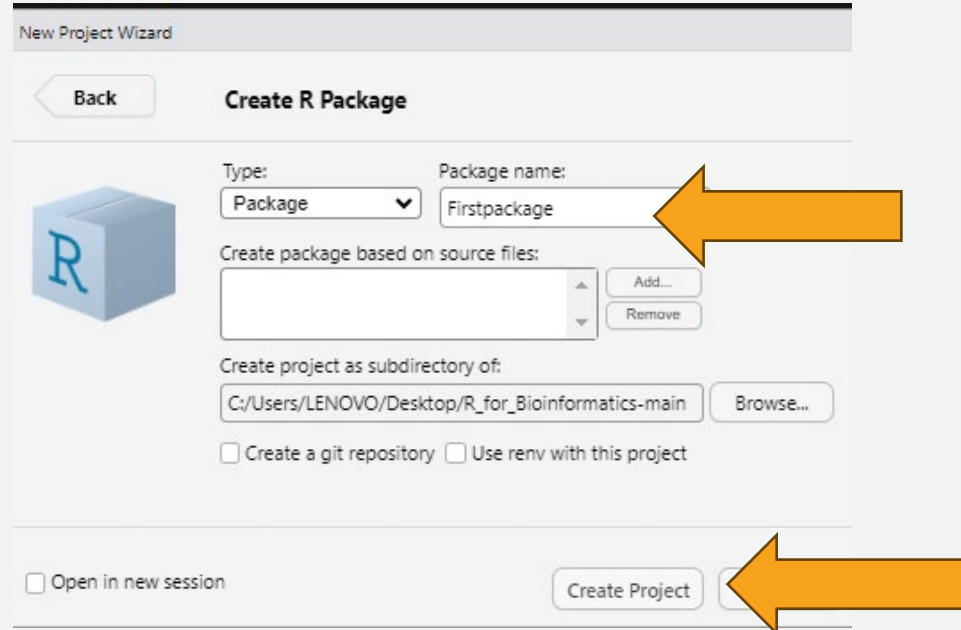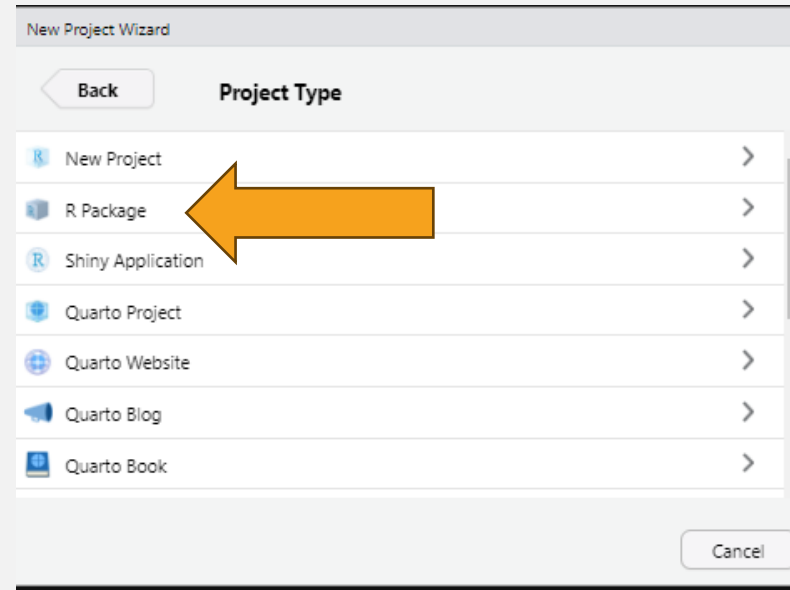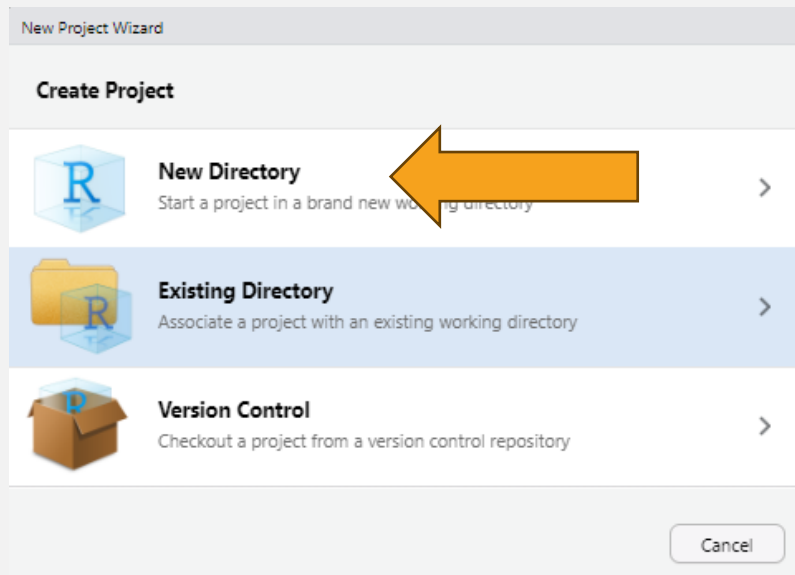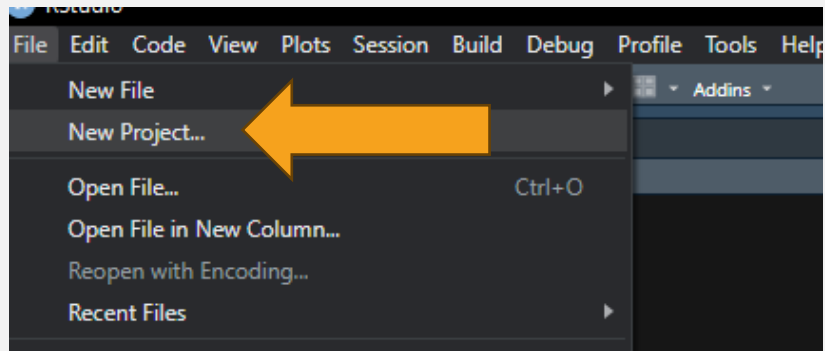

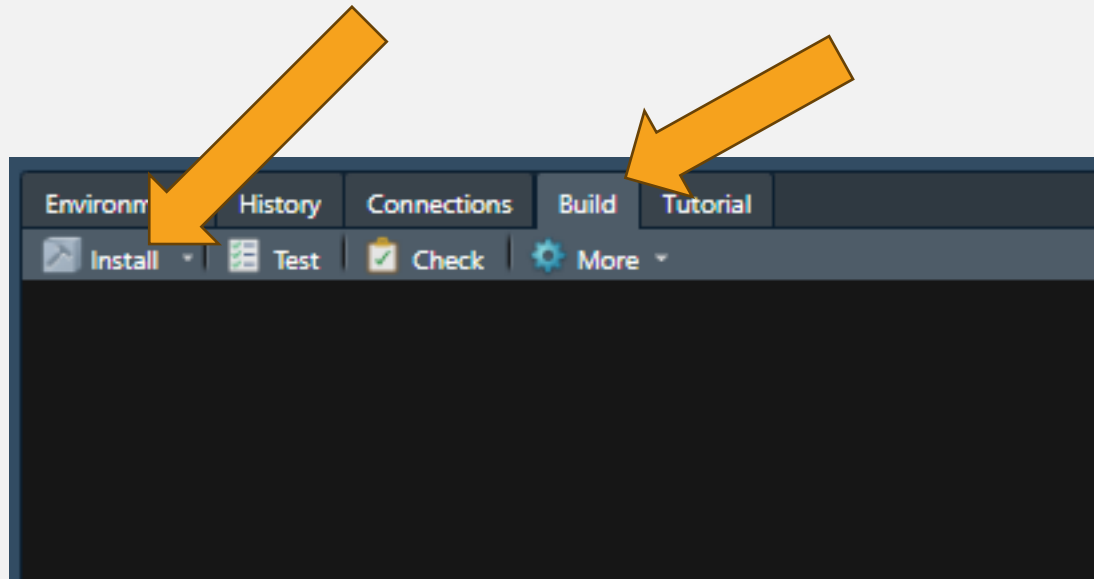

```
> library(Firstpackage)
> hello()
[1] "Hello, world!"
```

## BUILD A FUNCTION


To build a function

- ✓ Create a R file
- ✓ Name it with the function name
- ✓ Write code inside function

```
function_name <- function() {  
  #code  
}
```



- ✓ Build package again



# DOCUMENT FUNCTION

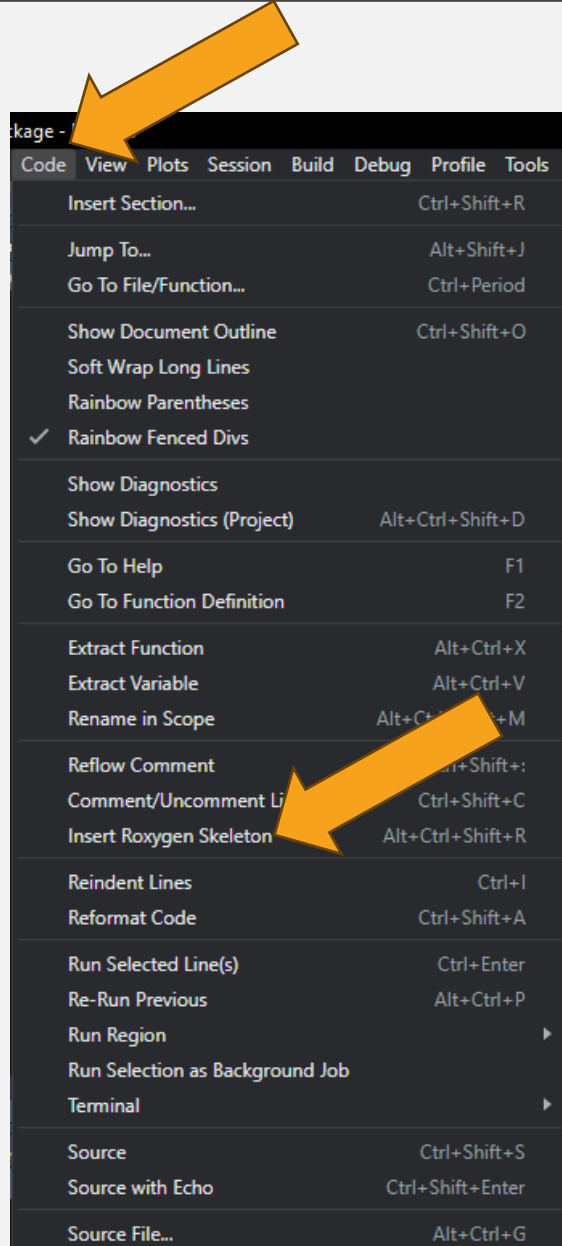

Insert Roxygen  
Skeleton

```
#' Title  
#'  
#' @param path  
#'  
#' @return  
#' @export  
#'  
#' @examples
```

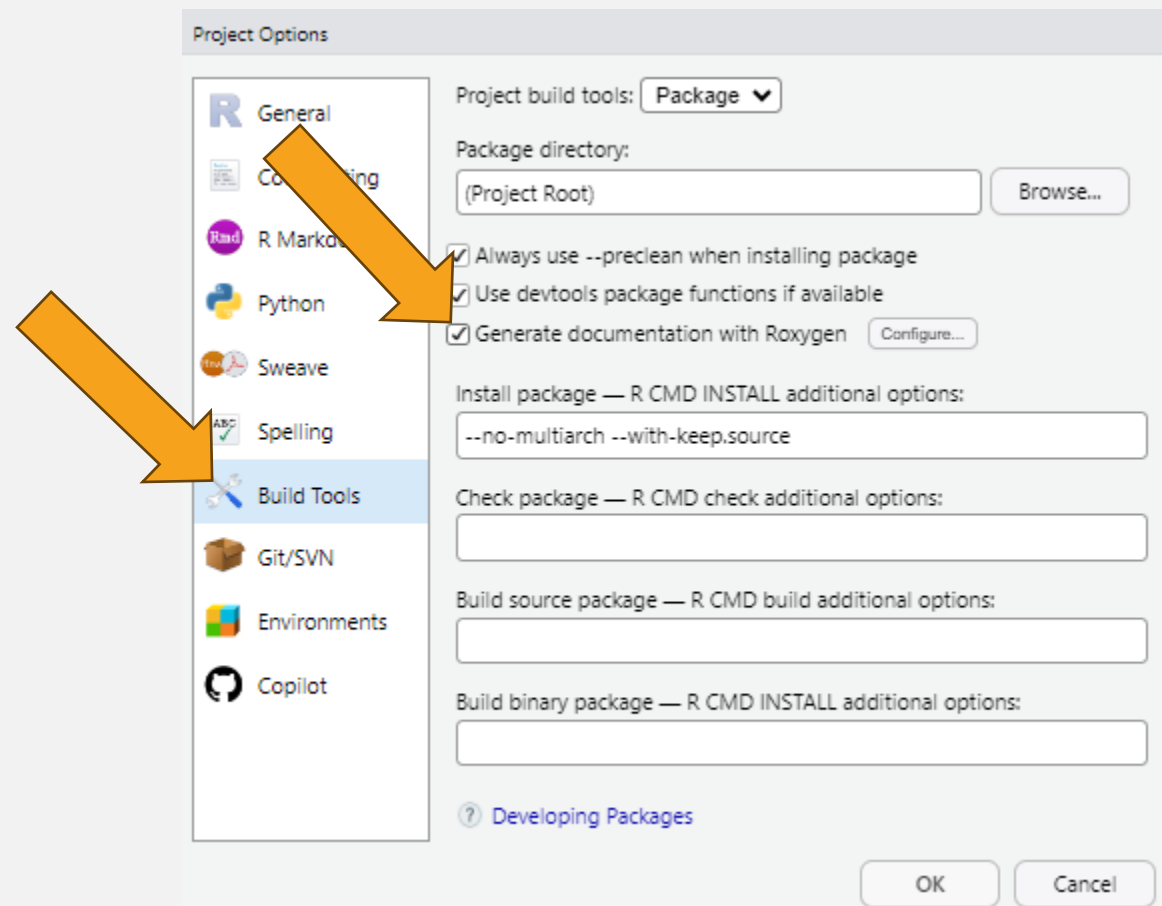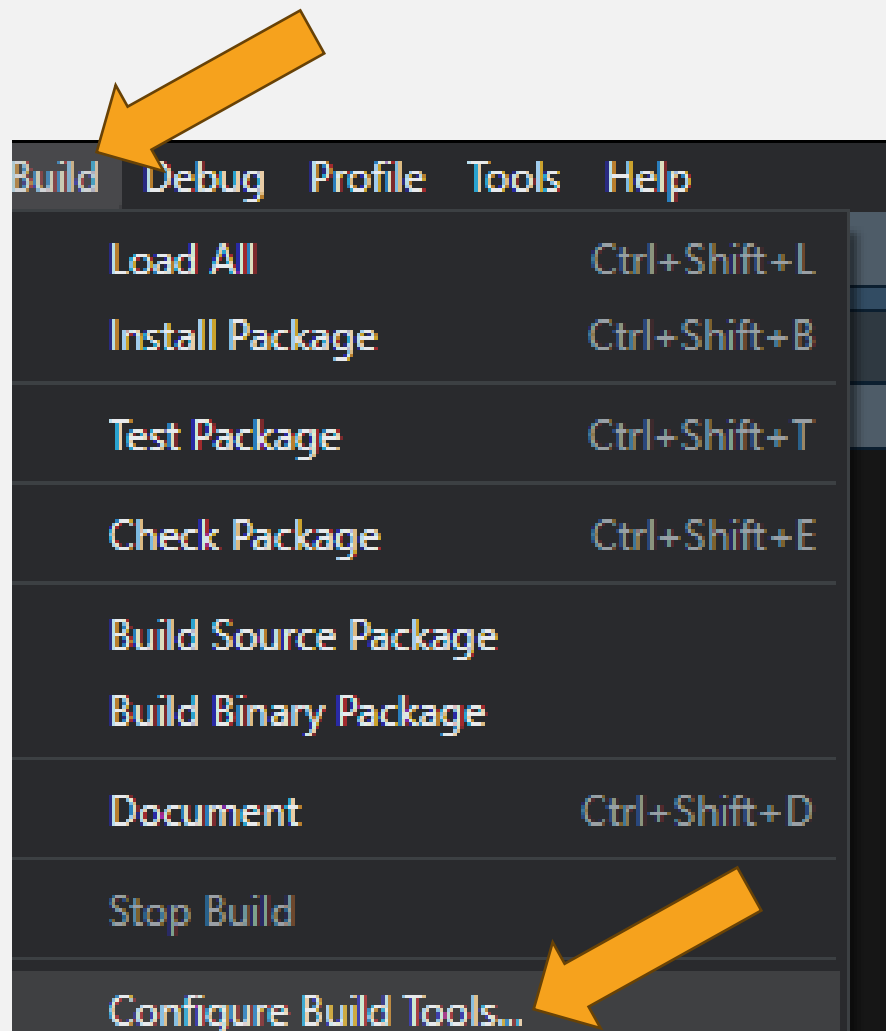

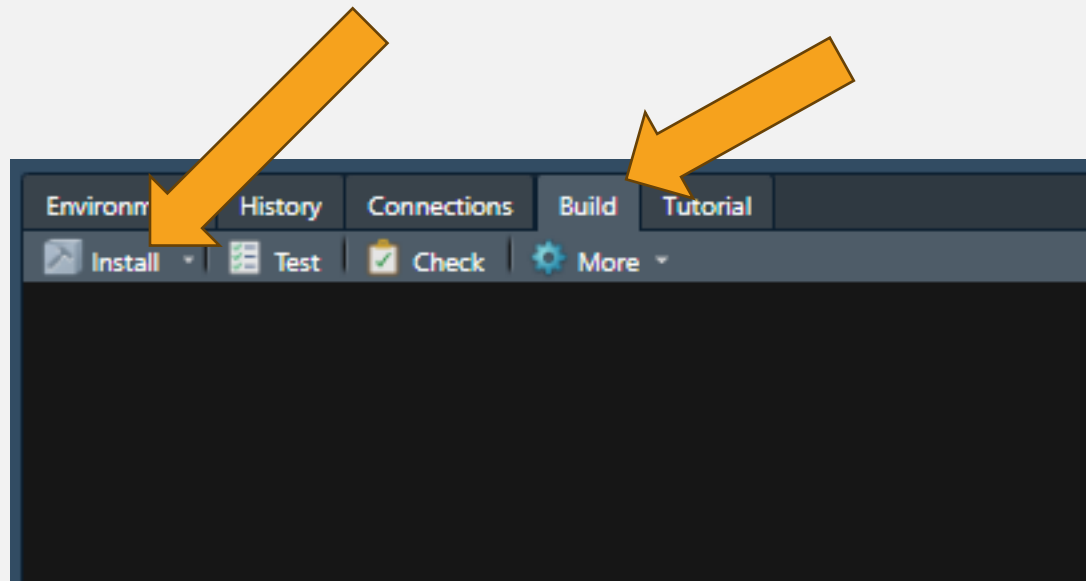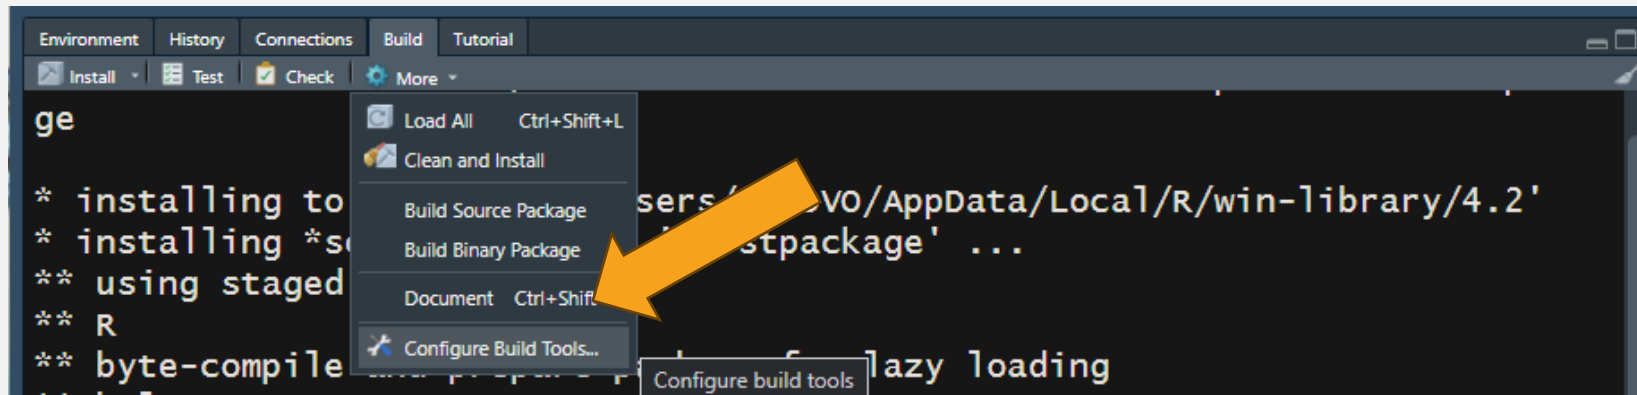

```
> ?hello()  
> |
```

Files Plots Packages Help Viewer Presentation



R: Hello, World! ▾ Find in Topic

hello {Firstpackage}

R Documentation

# Hello, World!

## Description

Prints 'Hello, world!'.

## Usage

```
hello()
```

## Examples

[Run examples](#)

```
hello()
```

---

[Package *Firstpackage* version 0.1.0 [Index](#)]



# INSTALLATION

- ✓ Import the package folder to GitHub
- ✓ You should be able to install it using a similar command

```
install.packages("devtools")
```

```
library(devtools)
```

```
devtools::install_github("omicscodeathon/repository/path")
```

```
library(package_name)
```

THANK YOU FOR YOUR  
ATTENTION !

Contact me via :

Email : [benaribi.hiba@gmail.com](mailto:benaribi.hiba@gmail.com)

Linkedin :

<https://www.linkedin.com/in/hiba-ben-aribi-b29634239/>