



Encoder output $H^{(L)} \in \mathbb{R}^{K \times V \times d}$

colored = real evidence ($m_k^{(n)} = 1$) $\emptyset$ = learned null state ($m_k^{(n)} = 0$)

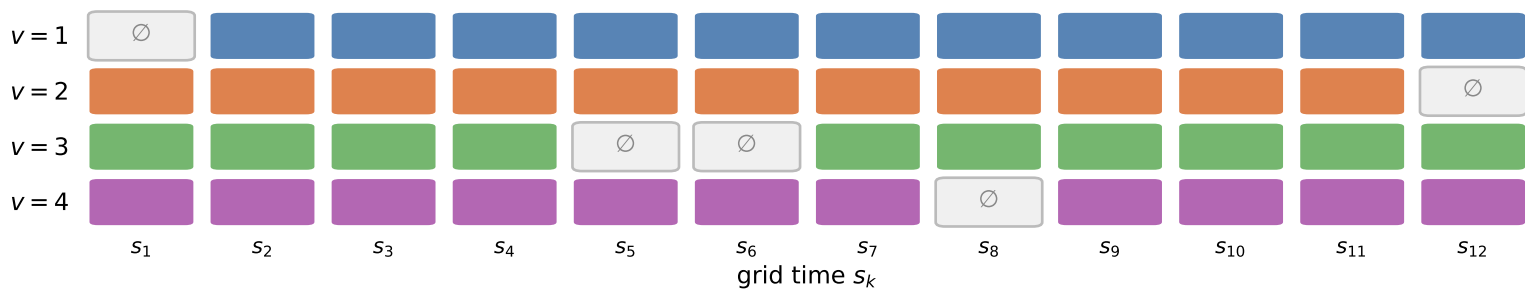

Stage 1 — per-variate temporal gate $\alpha_{k,n}^t = \text{softmax}_k (m_k^{(n)} \cdot \text{MLP}_t(H^{(L)}))$

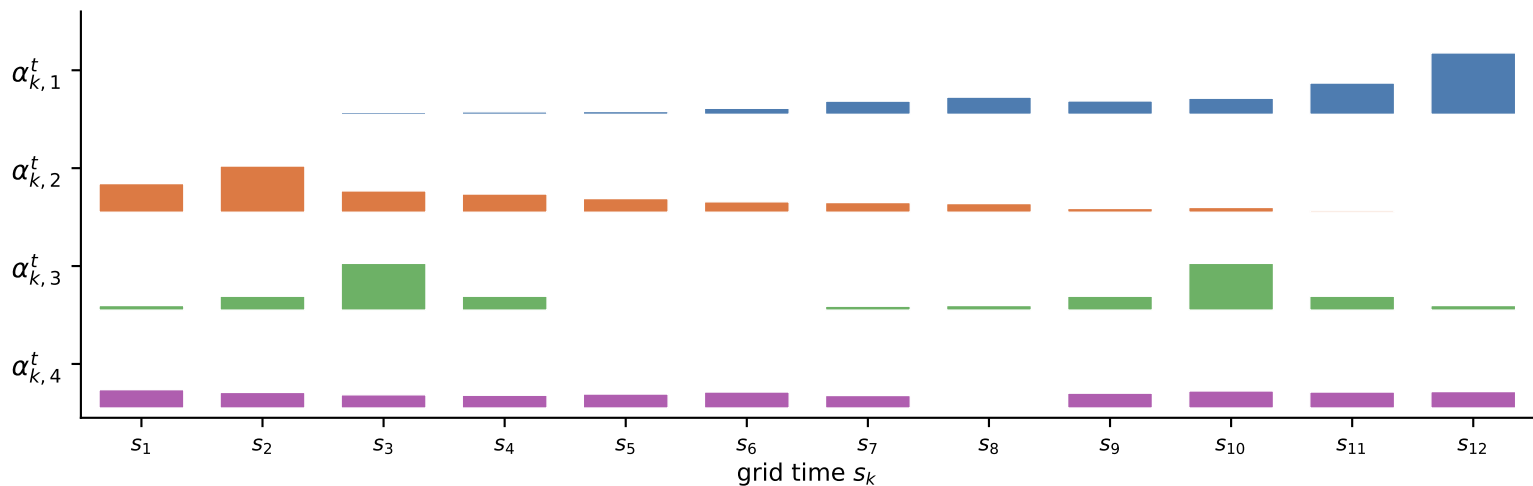

Stage 2 — variate gate $\alpha_n^v = \text{softmax}_n (\text{MLP}_v(H^{(v)}))$, $z = \sum_n \alpha_n^v H_n^{(v)}$

$$\alpha_1^v = 0.52$$

$$\alpha_2^v = 0.12$$

$$\alpha_3^v = 0.35$$

$$\alpha_4^v = 0.02$$

$H_1^{(v)}$

$H_2^{(v)}$

$H_3^{(v)}$

$H_4^{(v)}$

$\sum \rightarrow z \in \mathbb{R}^d$

Classifier
 z

logits $\in \mathbb{R}^C$

