

Code 1:

1. Answer : undefined889101

2.


f FEC: creation → execution
LE {arguments {0: 8, 1: 9, 2: 10, length: 3}}
x: undefined, a: 8, b: 9, c: 10
outer: c

c FEC: creation → execution
LE {arguments {0: 8, 1: 9, 2: 10, length: 3}}
a: 8, b: 9, c: 10
f: undefined, x: undefined
outer: global

Global EC: creation → execution
LE: {a: undefined, b: undefined, c: undefined}
x: 1
outer: null

Code 2:

1. 8125
- 2.

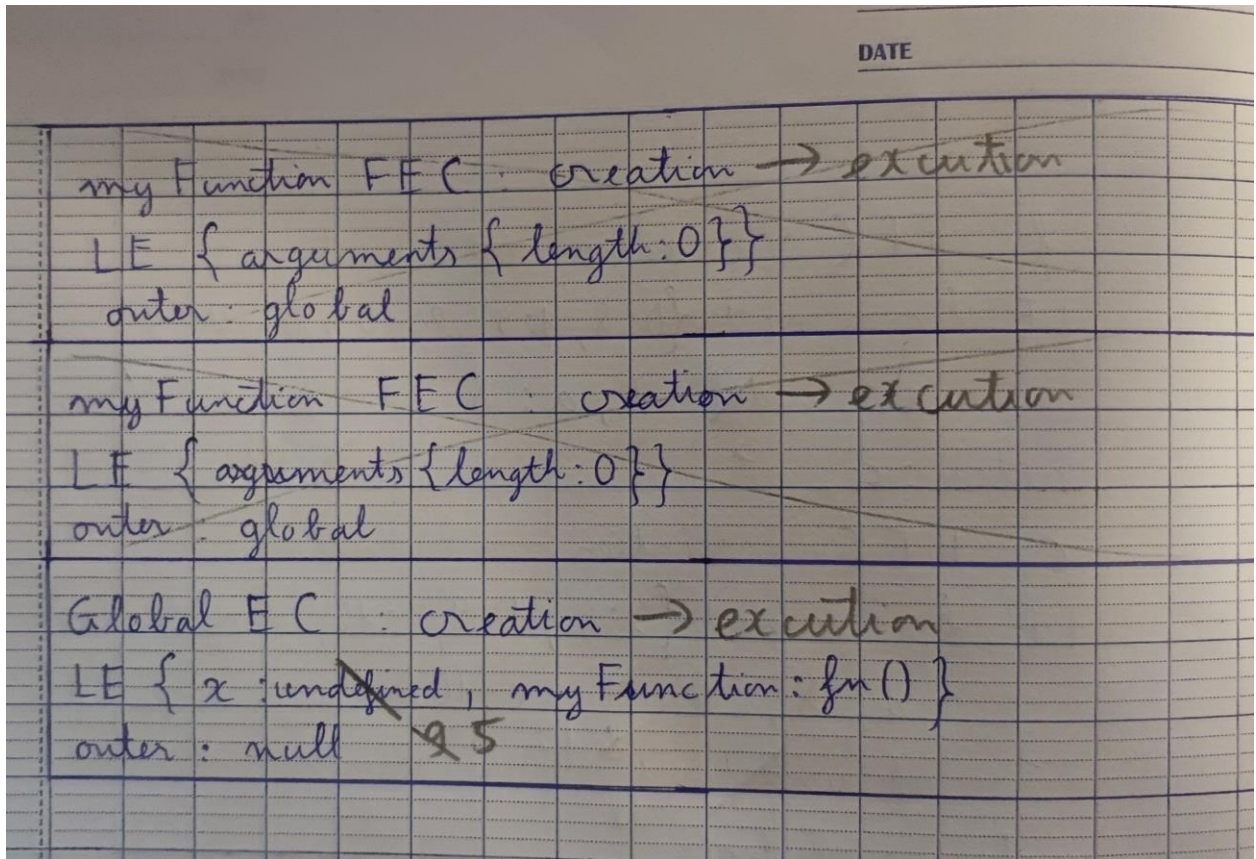

Code 3:

1. Popup with context: 10
- 2.

The image shows handwritten notes on a grid background, divided into two sections by a horizontal line. The top section describes a 'bar' FEC, and the bottom section describes the 'Global EC'.

bar FEC: creation → execution

LE { arguments { length: 0 }, foo: ~~undefined~~ }
10

outer: global

Global EC: creation → execution

LE { foo: ~~undefined~~, bar: fn() }
1

outer: null