Order-XML interface for order transmission at allcop GmbH & Co. KG

Version 3.0

1. General Information 2
2. Order structure 2
   2.1. Order 2
      2.1.1 Order directory 2
      2.1.2 Order-XML 3
      2.1.3 Image files 3
      2.1.4 Document files 3
3. Transmission of orders 3
   3.1. Requirements for the FTP server 4
   3.2. Directory structure of the FTP server 4
   3.3. Transmission process 4
4. Structure of the order-XML 6
   4.1. Node OrderData 7
   Node DealerAdresse 9
   4.2. Node KundenAdresse 10
   4.3. Node LieferAdresse 11
      4.3.1 Special case Packstation 12
   4.4. Knoten PickPoint 14
   4.5. Node Rechnungsdaten 15
   4.6. Node JPGs 17
   4.7. Node PureFotoBook 19
   4.8. Node PickProducts 21
5. Order production status updates 21
   5.1. Directory structure 22
   5.2. Order status file types 22
   5.3. Contents of order status files 23

1. General Information

This document serves as an interface description for the transfer of orders for production at allcop. In particular, it describes the basic structure of an order, as well as the transmission via FTPS and SFTP, standards that the files must satisfy and the structure of the order XML.

In the last part, it is explained, in which manner status messages of the production system are sent and which alternatives are possible.

This document or parts of this document may not be distributed or used for other purposes than for use at allcop without the consent of allcop.

2. Order structure

2.1. Order

Each order consists of an order directory and, depending on the order type, the image files in JPG or PDF format, invoice files in zipped PS format and the order XML. (see fig. 1.)

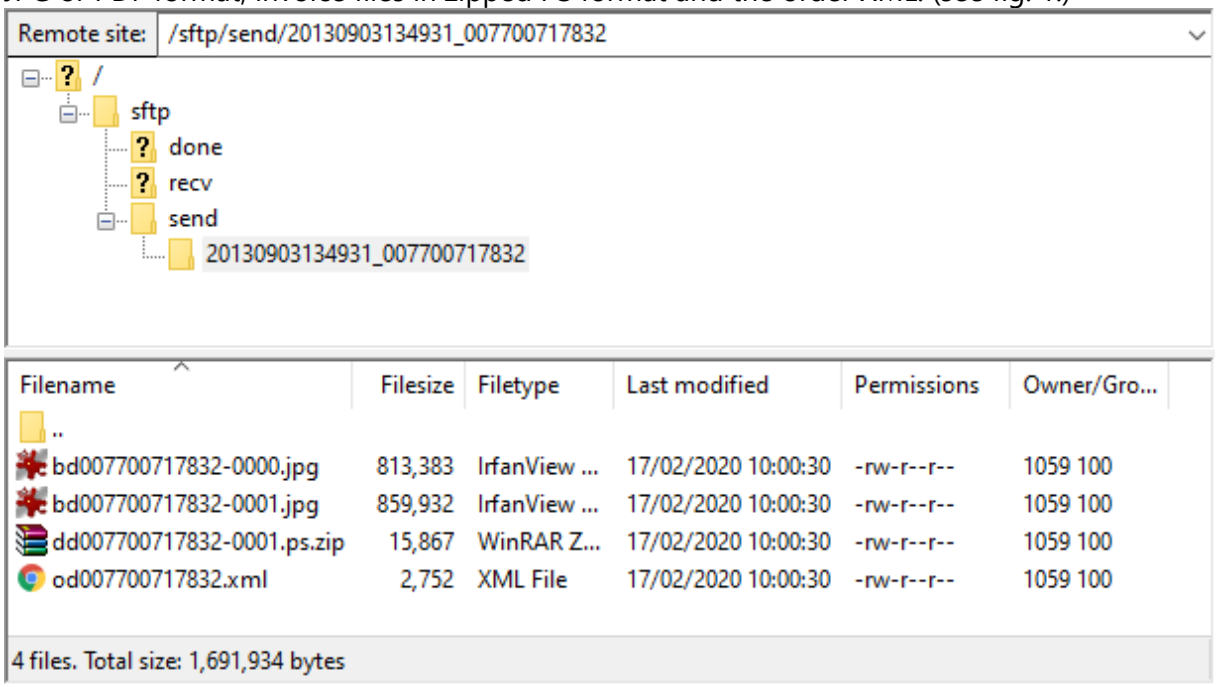

(Fig. 1.: Example order)

2.1.1 Order directory

The name of the order directory is created as follows:

JJJJMMTThhmmss_ppppaaaaaaaa

Characters	Description
JJJJMMTThhmmss	Date-time of order (year-month-day-hour-minute-second)
pppp	4-digit portal id (issued by allcop)
aaaaaaaa	Sequential 8-digit order id with leading 0 (issued by the customer)

2.1.2 Order-XML

The order-XML is in XML format. The structure of the file name is described below.

odppppaaaaaaaa.xml

Characters	Description
pppp	4-digit portal id (issued by allcop)
aaaaaaaa	Sequential 8-digit order id with leading 0 (issued by the customer)

2.1.3 Image files

The file name structure for image files is described as follows.

bdppppaaaaaaaa-nnnn.jpg
bfppppaaaaaaaa-nnnn.pdf
cfppppaaaaaaaa-nnnn.pdf

Characters	Description
pppp	4-digit portal id (issued by allcop)
aaaaaaaa	Sequential 8-digit order id with leading 0 (issued by the customer)
nnnn	Sequential number of the image file with leading 0 (starts at 0)

2.1.4 Document files

Should our production system print invoice/delivery notes or other documents, they must be in PostScript format in zipped format. If ZIP-compression is not possible, the file extension needs to be ps.zip in any case.

A maximum of 2 files are possible.

The file name structure for the document files is described as follows.

ddppppaaaaaaaa-nnnn.ps.zip

Characters	Description
pppp	4-digit portal id (issued by allcop)
aaaaaaaa	Sequential 8-digit order id with leading 0 (issued by the customer)
nnnn	Sequential number of the document file with leading 0 (starts at 0)

3. Transmission of orders

allcop supports the following protocols for the transmission of orders from the customer: FTPS and SFTP.

Since personal customer data is subject to confidentiality, the use of the encrypted protocols FTPS and SFTP is mandatory.

The customer provides an FTP server from which allcop collects the orders by means of download. This way, the lossless transmission of orders can be guaranteed should the

internet connection fail. The same server is used to upload messages relating to the production status of an order.

3.1. Requirements for the FTP server

- Write permission is required in the directories
- There should be no limit to the number of simultaneous connections.

3.2. Directory structure of the FTP server

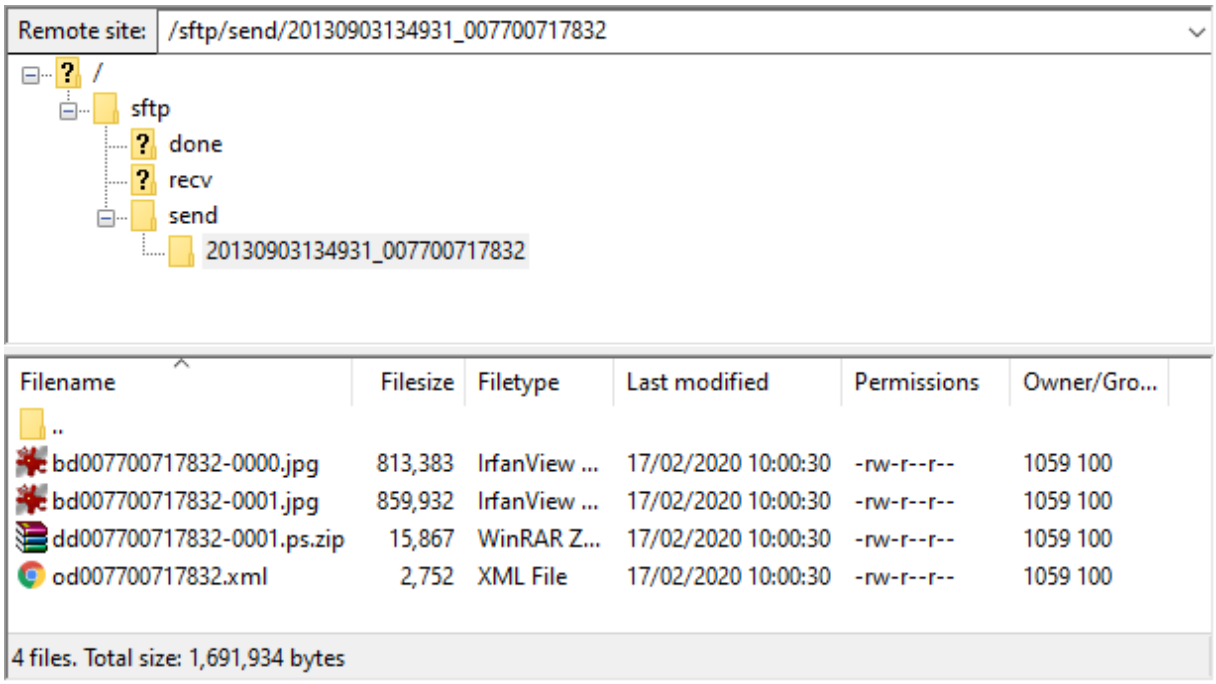

(Abb. 2.: Directory structure)

Starting from a root directory (optionally root (/), or another directory) there must exist 3 folders with write permission. In the example above, (see fig. 2) these are named send, recv, done. The customer can choose any name, but the function of these folders always remains the same.

Directory	Description
send	Directory in which the order directories including contents are provided.
recv	Directory to which the order status updates are uploaded to seperate order directories.
done	Directory to which the order directories are moved after successful download.

3.3. Transmission process

The download of an order by allcop is trigger-driven. This means that an order directory is downloaded only after the order directory is complete and the trigger file is present in the order directory. This trigger file can be the order-XML or an arbitrary 0-byte file. As long as

this file is not present, any order files can be uploaded in any time frame. It is important that once present, a file name cannot be changed afterwards. Each file is registered and a check for integrity is performed after the download.

In case the customer uses temporary file names, it is recommended to upload the order outside the scope of the "send" directory and move it to the "send" directory after completion with a "move" command (See fig. 3). This process is atomic.

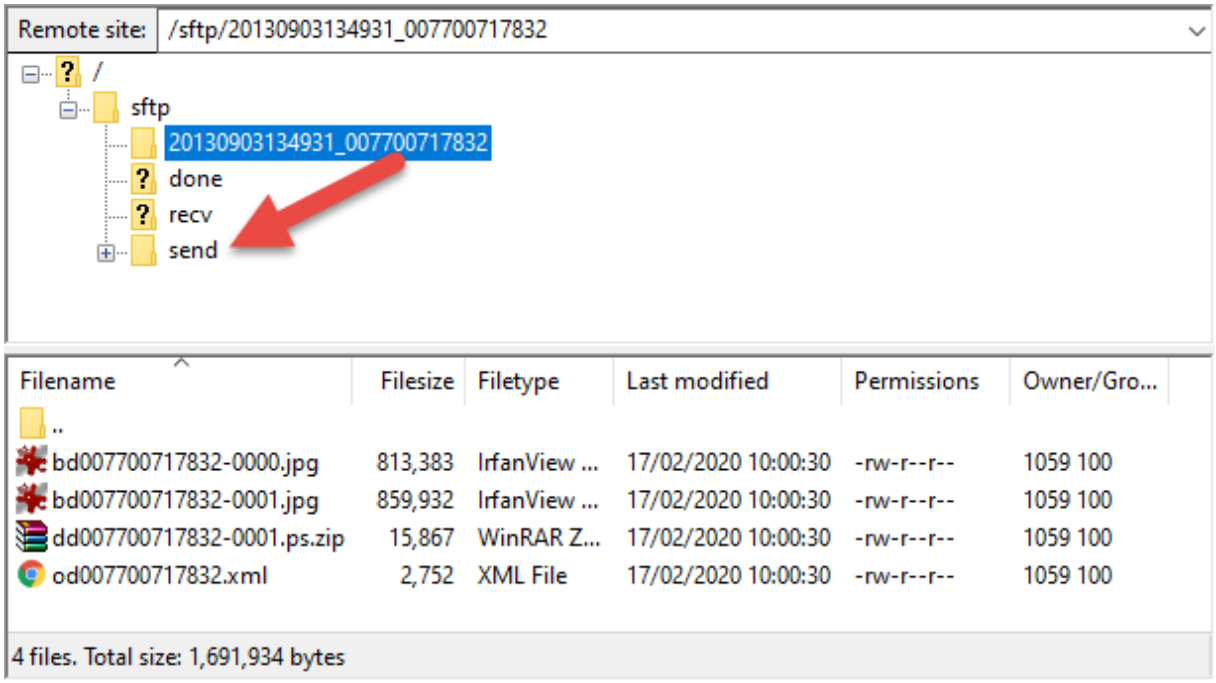

(Abb. 3.: Order directory outside scope of „send"-directory)

After successful download the order is moved to the "done" folder. This procedure is performed once. If the there is already a folder of the same name in the "done" folder, the process will fail. The order will however, still be produced and no new download will be performed for the entire production process and archiving period. The archiving period starts with the registration of an order directory. Only after this period expires, the order is deleted from the database and is registered as a new order. Therefore it is the customers responsibility to clean the "done" directory on a regular basis.

4. Structure of the order-XML

The XML file corresponds to XML version 1.0 and must be encoded in UTF-8. It has the following structure:

```
<?xml version="1.0" encoding="utf-8" ?>
<Order version="2.1">
        <OrderData />
        <DealerAdresse />
        <KundenAdresse />
        <LieferAdresse />
        <PickPoint />
        <Rechnungsdaten />
        <JPGs count="0" />
        <PureFotoBook count="0" />
    <PickProducts count="0" />
</Order>
```

The individual order XML nodes are described below.

4.1. Node OrderData

```
<OrderData>
   <PortalID>9455</PortalID>
   <wwwNr>777777</wwwNr>
   <Orderdate>20090108124851</Orderdate>
   <Eingang>20090108134851</Eingang>
   <ZielDatum>20171110134851</ZielDatum>
   <OrderUuid>dc7bf559-6e7b-49fc-b5d9-cd8f5030c357</OrderUuid>
   <OrderID>12020568</OrderID>
   <DealerID>9455</DealerID>
   <CommissionDealerID >9455</CommissionDealerID>
   <Endkunde>336113</Endkunde>
   <Fremdkunde>123456</Fremdkunde>
   <Waehrung>EUR</Waehrung>
   <Carrier id="1">DHL</Carrier>
   <Versandart>HOME</Versandart>
   <Anlieferung>01</Anlieferung>
   <Bestellweg>SA</Bestellweg>
  <Bestellsoftware >
            <Hersteller>allcop</Hersteller>
            <Softwaretyp>Web</Softwaretyp>
  </Bestellsoftware>
   <OrderTyp>N</OrderTyp>
   <ReklaGrund>00</ReklaGrund>
   <BonID>4711</BonID>
   <SBA>88888888</SBA>
   <CustomText>This is a free textfield</CustomText>
   <OrderUuid>ffc72aee-77d5-44d3-9b39-39478349b590</OrderUuid>
</OrderData>
```

Node	Attributes	Description	Format	Max. length	Required field
OrderData		Contains control data of the order			**YES**
PortalID		portal id at allcop	string	8	yes
wwwNr		Arbitrary order number	string	23	yes
Orderdate		Order data of the (end-) customer Format: JJJJMMTThhmmss	string	fixed 14	yes
Eingang		Date of provision	string	fixed 14	no

		Format: JJJJMMTThhmmss			
ZielDatum		Shipping date target	string	Fix 14	no
OrderID		8-digit order number for allcop	int	8	yes
OrderUuid		36-digit UUID (version 4 or version 1)	string	Fixed 36	yes
DealerID		Id of the customer at allcop	string	15	no
Endkunde		Arbitrary end customer id	string	15	no
Waehrung		Currency	string	3	no
Versandart		Shipping method HOME – dispatch by mail to the end customer SHOP – dispatch by mail to a branch	string	6	yes
Carrier	id	ID of the carrier, if configured in the portal. Possible values are provided by allcop	int	2	nein
Anlieferung		Delivery method 00 – Mail 01 – Self-collection 02 – Bulk shipment	int	2	no
Bestellweg		Indicates the origin of the order Is assigned by allcop	string	2	no
Bestellsoftware		Information regarding the ordering software			
	Hersteller	Manufacturer	string	24	no
	Softwaretyp	Type of software Web = Browser-based Client = Installable software App = Mobile app Terminal = Photo kiosk	string	9	yes

Ordertyp		Type of order N – Normal order R – Complaint	char	1	no
ReklaGrund		Reason for complaint Only populated if OrderTyp is "R".	int	4	no
BonID		Original order id of the end customer	string	5	no
SBA		Special billing	int	8	no
OrderUuid		Universal unique identification of the order	string	36	no
CustomText		Custom text for customer, printable on a label	string	50	no

Node DealerAdresse

```
<DealerAdresse>
   <FilialeID />
   <Title>Herr Dr.<Title />
   <Vorname>Max</Vorname>
   <Nachname>Mustermann<Nachname />
   <Firma>Musterfirma</Firma>
   <Strasse>Musterstr.</Strasse>
   <Hausnummer>44</Hausnummer>
   <PLZ>40323</PLZ>
   <Ort>Musterdorf</Ort>
   <Ortsteil>Musterortsteil</Ortsteil>
   <Land>DE</Land>
   <Email>max.mustermann@email.de</Email>
   <Telefon>0234/5678924</Telefon>
   <Fax>0234/5678929</Fax>
</DealerAdresse>
```

Node	Attributes	Description	Format	Max. length	Required field
DealerAdresse		Contains details of a branch			**NO**
FilialID		Branch id	string	8	no
Title		Title	string	24	no
Vorname		First name	string	50	no

Nachname		Last name	string	50	yes
Firma		Company	string	50	yes
Strasse		Street	string	50	yes
Hausnummer		House number	string	8	yes
PLZ		Postal code	string	6	yes
Ort		City	string	50	yes
Ortsteil		District	string	25	no
Land		Country code as of ISO A2	string	2	no
Email		E-mail address	string	78	no
Telefon		Telephone number	string	26	no
Fax		Fax number	string	26	no

4.2. Node KundenAdresse

```
<KundenAdresse>
  <Title>Herr</Title>
  <Vorname>Max</Vorname>
  <Nachname>Mustermann</Nachname>
  <Firma />
  <Strasse>Musterstr.</Strasse>
  <Hausnummer>23</Hausnummer>
  <PLZ>40323</PLZ>
  <Ort>Musterdorf</Ort>
  <Ortsteil>Musterortsteil</Ortsteil>
  <Land>DE</Land>
  <Email>max.mustermann@email.de</Email>
  <Telefon>0234/5678922</Telefon>
  <Fax>0234/5678929</Fax>
</KundenAdresse>
```

Node	Attributes	Description	Format	Max. length	Required field
KundenAdresse		Contains details of a customer address			**YES**
Title		Title	string	24	no
Vorname		First name	string	50	no
Nachname		Last name	string	50	yes
Firma		Company	string	50	yes
Strasse		Street	string	50	yes

Hausnummer		House number	string	8	yes
PLZ		Postal code	string	6	yes
Ort		City	string	50	yes
Ortsteil		District	string	25	no
Land		Country code as of ISO A2	string	2	no
Email		E-mail address	string	78	no
Telefon		Telephone number	string	26	no
Fax		Fax number	string	26	no

4.3. Node LieferAdresse

If the node LieferAdresse is omitted, the delivery address automatically corresponds to the customer/invoice address.

```
<LieferAdresse>
  <Title>Herr</Title>
  <Vorname>Max</Vorname>
  <Nachname>Mustermann
  <Firma>Musterfirma</Firma>
  <Strasse>Musterstr.</Strasse>
  <Hausnummer>19u</Hausnummer>
  <PLZ>40321</PLZ>
  <Ort>Musterort</Ort>
  <Ortsteil>Musterortsteil</Ortsteil>
  <Land>DE</Land>
  <Email>max.mustermann@email.de</Email>
  <Telefon>+33/234/5678924</Telefon>
  <Fax>+33/234/5678929</Fax>
</LieferAdresse>
```

Node	Attributes	Description	Format	Max. length	Required field
LieferAdresse		Contains details of a delivery address			**NO**
Title		Title	string	24	no
Vorname		First name	string	50	no
Nachname		Last name	string	50	yes
Firma		Company	string	50	yes
Strasse		Street	string	50	yes
Hausnummer		House number	string	8	yes

PLZ		Postal code	string	6	yes
Ort		City	string	50	yes
Ortsteil		District	string	25	no
Land		Country code as of ISO A2	string	2	no
Email		E-mail address	string	78	no
Telefon		Telephone number	string	26	no
Fax		Fax number	string	26	no

4.3.1 Special case Packstation

By specifying the node Packstation with the attribute used="1", the information contained within the node Packstation will be implemented for DHLs routing coding. Any information contained within Strasse and Hausnummer will be ignored.

```
<LieferAdresse>
   <Title>Herr</Title>
   <Vorname>Max</Vorname>
   <Nachname>Mustermann</Nachname>
   <Firma>Musterfirma</Firma>
   <Strasse>Musterstr.</Strasse>
   <Hausnummer>19u</Hausnummer>
   <PLZ>40321</PLZ>
   <Ortsteil></Ortsteil>
   <Ort>Musterdorf</Ort>
   <Land>DE</Land>
   <Packstation used="1">
     <Postnummer>1234567891</Postnummer>
     <Packstationsnummer>101</Land>
   </Packstation>
   <Email>max.mustermann@email.de</Email>
   <Telefon>+33/234/5678924</Telefon>
   <Fax>+33/234/5678929</Fax>
</LieferAdresse>
```

Node	Attributes	Description	Format	Max. length	Required field
LieferAdresse		Contains details of a delivery address			**NO**
Title		Title	string	24	no
Vorname		First name	string	50	no
Nachname		Last name	string	50	yes

Firma		Company	string	50	yes
Strasse		Street	string	50	yes, no in case of Packstation
Hausnummer		House number	string	8	yes, no in case of Packstation
PLZ		Postal code	string	6	yes
Ortsteil		District	string	50	no
Ort		City	string	50	yes
Land		Country code as of ISO A2	string	2	no
Email		E-mail address	string	78	no
Telefon		Telephone number	string	26	no
Fax		Fax number	string	26	no
Packstation	used	In case of used="1" the node Packstation is evaluated, in case of used="0" it is ignored.	int	1	no
Postnummer		6-10 digit Postnummer	string	10	yes, if used
Packstationsnummer		3-digit Packstationsnummer	string	3	yes, if used

4.4. Knoten PickPoint

```
<PickPoint>
  <PickPointID>123456</PickPointID>
  <Title>Herr</Title >
  <Firstname>Max</Firstname>
  <Lastname>Mustermann</Lastname>
  <Company />
  <Street>Musterstrasse</Street>
  <Housenumber>12a</Housenumber>
  <Postcode>40321</Postcode>
  <City>Musterort</City>
  <District>Musterortsteil</District>
  <Country>DE</Country>
  <Email>max.mustermann@email.de</Email>
  <Phone>+33/234/5678924</Phone>
</PickPoint>
```

Node	Attributes	Beschreibung	Format	Max. Länge	Mußfeld
PickPoint		Contains data of a pickpoint (or pickup location)			**no**
PickPointID		Unique ID of a pickpoint	char	36	yes
Title		Title	string	24	no
Firstname		First name	string	50	no
Lastname		Last name	string	50	yes
Company		Company	string	50	yes
Street		Street	string	50	yes
Housenumber		House number	string	8	yes
Postcode		Postcode	string	6	yes
City		City	string	50	yes
District		District	string	25	no
Country		Länderkennung nach ISO A2	string	2	no
Email		Email address	string	78	no
Phone		Telephone number	string	26	no

4.5. Node Rechnungsdaten

```
<Rechnungsdaten>
   <Generator Out="PDF" Start="ja" />
   <PromoCode>FB1511AL</PromoCode>
   <Wertgutschein Code="Kundendienst" VKWert="0020000" />
   <Versandkosten>0003950</Versandkosten>
   <DealerID />
   <Bonussystem>
        <CardID />
        <CouponID />
        <PartnerID />
   </Bonussystem >
   <Zahlungsart>Paypal</Zahlungsart>
   <TransID>6DL027188P342550B</TransID>
   <PayID>0003950</PayID>
   <Status>Bezahlt</Status>
   <Warenkorbinfo />
   <Betrag />
   <Waehrung />
   <Kreditkartenmarke />
   <Rechnungsnummer>1234ab</Rechnungsnummer>
</Rechnungsdaten>
```

Node	Attributes	Description	Format	Max. length	Required field
Rechnungsdaten		Contains data for credit card billing.			**NO**
Generator					yes
	Out		string		yes
	Start		string		yes
PromoCode		Promotion voucher for pricing	string		no
Wertgutschein		This field is used for individual vouchers (pure value vouchers) which only influence the sales price	string		no
	Code	Name of the voucher. Currently only the value "Kundendienst" is enabled	string		no
	VKWert	Value of the voucher in Euro 4 pre-decimal places, 3 decimal places	int	fixed 7	no

Versandkosten		Shipping costs 4 pre-decimal places, 3 decimal places without separator with leading ‚0'.	int	fixed 7	no
DealerID		Dealer id at allcop	string	15	
Bonussystem		Contains data for the bonus scheme (e.g. Payback)			no
CardID		Card id	string	20	no
CouponID		Coupon id	string	20	no
PartnerID		The partner from whom the card was requested Currently the schemes "Payback" and "ActiveBeauty" are supported. Payback = PB ActiveBeauty = AB	string	5	no
Zahlungsart		Specification of payment method Default is "Rechnung" Alternative is "Paypal"	string	10	
TransID		Transaction id of payment provider	string		
PayID		Reference number of payment provider (e.g. credit card purchases). Not required for Paypal.			
Status		Status of payment With Paypal this status should be set to "Bezahlt"			
Warenkorbinfo					
Betrag		Billing amount 4 pre-decimal places, 3 decimal places without separator with leading ‚0'.	int	fixed 8	
Waehrung		Currency	string	3	

Kreditkartenmarke		Credit card brand	string		
Rechnungsnummer		Invoice number	string		

4.6. Node JPGs

```
<JPGs count="2">
   <Print Artikel="10010000" Kopien="1" Preis="0011500" Surface="01" >
      <File>
         <FileName>bd945512020568-0000.jpg</FileName>
         <BackPrint>pict1079.jpg</BackPrint>
         <Enhance>1</Enhance>
         <EnhanceRedEye>1</EnhanceRedEye>
         <EnhanceNoise>1</EnhanceNoise>
         <FileCRC>9859865b</FileCRC>
      </File>
   </Print>
   <Print Artikel="10010000" Kopien="1" Preis="0011500" Surface="00" >
      <File>
         <FileName>bd945512020568-0001.jpg</FileName>
         <BackPrint>pict1199.jpg</BackPrint>
         <Enhance>1</Enhance>
         <EnhanceRedEye>1</EnhanceRedEye>
         <EnhanceNoise>1</EnhanceNoise>
         <FileCRC>9859665b</FileCRC>
      </File>
   </Print>
</JPGs>
```

Node	Attribute	Description	Format	Max. length	Required field
JPGs		Contains the data for print products (prints and gift products)			**NO**
	count	Quantity of print articles	int	4	yes
Print		Contains the following information per print			yes
	Artikel	Product id of print	string	8	yes
	Kopien	Quantity of copies of this print	int	4	yes
	Preis	Price per copy 4 pre-decimal places, 3 decimal places without	int	fixed 7	yes

		separator with leading ‚0'.			
	Surface	Surface of the print: Gloss: 00 Matt: 01	int	2	no
File		Data for individual image file:			yes
FileName		File name: Format bd**ppppaaaaaaaa-nnnn**.jpg **pppp**: portal id **aaaaaaaa**: order id with leading '0' **nnnn**: Sequential image number in order, starts at 0	string	fixed 23	yes
Backprint		Text for back print	string	80	
Enhance		Image optimization: 0 - off / 1 - on	int	2	no
EnhanceRedEye		Enhancement red eye 0 - off / 1 - on	int	2	nein
EnhanceNoise		Enhancement noise 0 - off / 1 - on	int	2	nein
FileCRC		Checksum of the file (CRC32)	string	10	nein

4.7. Node PureFotoBook

Node structure if products (pure photo books, calendars, folding cards) are provided in PDF format (pre processed):

```
<PureFotoBook count="2">
   <Product Artikel="17030000" Kopien="2" Preis="0032000">
      <BookFile FileName="bf945512020569-0001.pdf" />
      <Template FileName="EP_6_hoch.png" />
      <Enhance>1</Enhance>
   </Product>
   <Product Artikel="17030000" Kopien="3" Preis="0032000">
      <BookFile FileName="bf945512020569-0002.pdf" /
      <Template FileName="EP_6_hoch.png" />
      <Enhance>0</Enhance>
   </Product>
</PureFotoBook>
```

Node structure if digital print books are provided:

The products (books) are supplied in two PDF files, the book contents and the cover. These products receive the type "P". The cover files must be supplied with the fixed identifier "cf".

```
<PureFotoBook count="2">
   <Product Artikel="17030000"  Typ="P" Kopien="2" Preis="0032000">
      <BookFile FileName="bf945512020569-0001.pdf" />
      <CoverFile FileName="cf945512020569-0001.pdf" />
      <Enhance>1</Enhance>
   </Product>
   <Product Artikel="17030000" Typ="P" Kopien="3" Preis="0032000">
      <BookFile FileName="bf945512020569-0002.pdf" />
      <CoverFile FileName="cf945512020569-0002.pdf" />
      <Enhance>0</Enhance>
   </Product>
</PureFotoBook>
```

Node	Attribute	Description	Format	Max. length	Required field
PureFotoBook		Contains the data for PureFotoBook products:			**NO**
	count	Quantity of PureFotoBook products	int	4	yes
Product		Contains the following information per PureFotoBook			yes
	Artikel	Product id of PureFotoBook	string	8	yes
	Kopien	Quantity of copies of a PureFotoBook	int	4	yes

	Preis	Price per copy 4 pre-decimal places, 3 decimal places without separator with leading ‚0'.	int	fixed 7	yes
	Typ	Supplied type Digital photobook products require the Typ "P".	string	1	no
BookFile	FileName	This field is used if the book is provided in PDF format. File name of PDF photobook Format bf**ppppaaaaaaaa-nnnn**.jpg **pppp**: portal id **aaaaaaaa**: Order id with leading '0'. **nnnn**: Sequential PDF file number in order, starts at 0	string	60	Yes, if DesignID is missing
	DesignID	ID of a design template. This field is used, if a design template should be applied to the book contents	int	10	Yes, if FileNam e is missing.
CoverFile	FileName	Cover file name of the photobook: Format cf**ppppaaaaaaaa-nnnn**.jpg **pppp**: portal id **aaaaaaaa**: order id with leading ‚0' **nnnn**: Sequential PDF file number in order, starts at 0	string	60	Yes, if Typ is ‚P' and if DesignID is missing.
	DesignID	ID of a design template. This field is used, if a design template should be applied to the book contents. Only evaluated if "Anlieferung" is set to Typ ‚P'..	int	10	Yes, if Typ is ‚P' and if FileNam e is missing.
Enhance		Image optimization: 0 - off / 1 - on	int	2	Yes

4.8. Node PickProducts

```
<PickProducts count="2">
  <PickProduct Artikel="47110000" Anzahl="1" Preis="0011500" />
  <PickProduct Artikel="47120000" Anzahl="2" Preis="0021350" />
</PickProducts >
```

Node	Attribute	Description	Format	Max. length	Required field
PickProducts		Contains the data for pick-products (Products which are withdrawn from the pick stock)			**NO**
	count	Quantity of pick product nodes	int	4	yes
PickProduct		Contains the data per pick-product			yes
	Artikel	Article number of the pick-product	string	8	yes
	Anzahl	Quantity of the pick-product	int	4	yes
	Preis	Price of a pick pick-product 4 pre-decimal places, 3 decimal places without separator with leading ‚0'.	int	fixed 7	yes

5. Order production status updates

After the order has been transferred to the allcop production system, allcop creates a subdirectory with the name of the order on the FTP server in the feedback directory provided for this purpose.

The status messages of the order are uploaded to this subdirectory as files. The feedback messages always refer to the entire order. Status confirmation at item level is not supported. (See figure 4).

The portal operator is responsible for processing these status messages and eventual dispatching of e-mails to the end customer.

In the event you have been assigned the Portal-ID 2000, the files will be deposited directly into the "recv"-directory as described under section 5.3 and not in subdirectories.

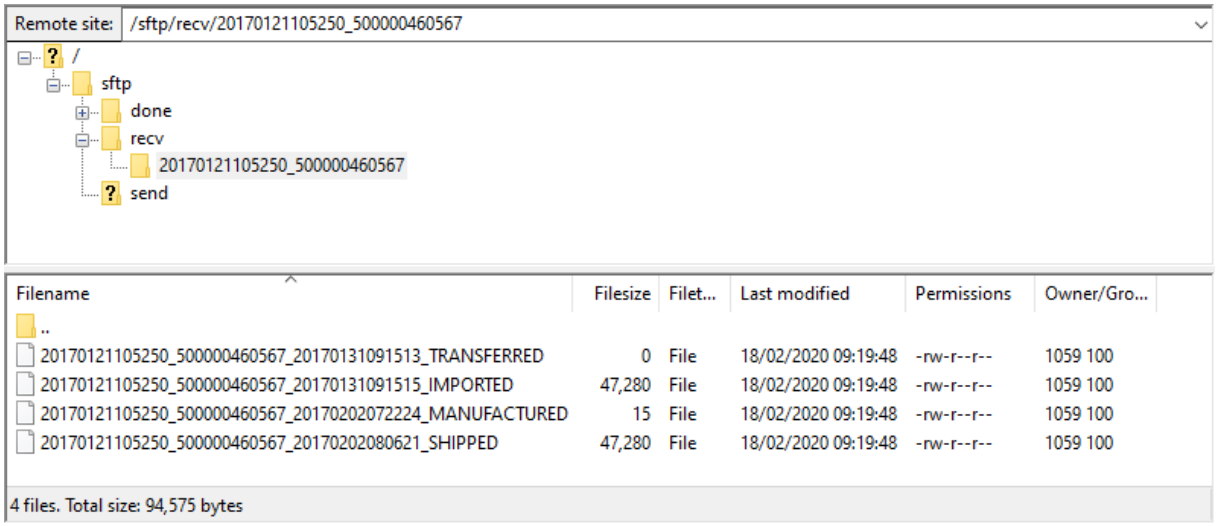

(Fig. 4.: Complete set of order status files)

5.1. Directory structure

The directory name of an order is provided in allcop's format:

JJJJMMTThhmmss_ppppaaaaaaaa

Characters	Description
JJJJMMTThhmmss	Date-time of order (year-month-day-hour-minute-second)
pppp	4-digit portal id (issued by allcop)
aaaaaaaa	Sequential 8-digit order id with leading 0 (issued by the customer)

5.2. Order status file types

The order status files sent by allcop are transferred in the exact moment the order passes the corresponding production status:

JJJJMMTThhmmss_ppppaaaaaaaa_JJJJMMTThhmmss_TRANSFERRED
JJJJMMTThhmmss_ppppaaaaaaaa_JJJJMMTThhmmss_IMPORTED
JJJJMMTThhmmss_ppppaaaaaaaa_JJJJMMTThhmmss_MANUFACTURED
JJJJMMTThhmmss_ppppaaaaaaaa_JJJJMMTThhmmss_SHIPPED

Characters	Description
JJJJMMTThhmmss	Date-time of order (year-month-day-hour-minute-second)
JJJJMMTThhmmss	Timestamp of the update (year-month-day-hour-minute-second)
pppp	4-digit portal id (issued by allcop)
aaaaaaaa	Sequential 8-digit order id with leading 0 (issued by the customer)
TRANSFERRED	The order was successfully transferred to the production system

IMPORTED	The order was imported into the production system. Production will now commence.
MANUFACTURED	The production of the order was successfully completed
SHIPPED	The order has just been shipped.

Depending on customer requirements, either all order status files can be transferred or just the SHIPPED file.

5.3. Contents of order status files

Die TRANSFERRED file is always empty.

The IMPORTED file is identical to the original order XML

The MANUFACTURED file consists of up to two lines.
The first line contains the internal customer number which is associated with the order.
The second line optionally contains the used postage product number.

The SHIPPED file is identical to the original order XML, however contains the tracking information as additional tags within the node OrderData.

Example:


```
<OrderData>
        <PortalID>9527</PortalID>
        <wwwNr>E9VNFK4</wwwNr>
        <Orderdate>20161127193941</Orderdate>
        <Eingang>20161127204343</Eingang>
        <OrderID>42870653</OrderID>
        <OrderUuid>dc7bf559-6e7b-49fc-b5d9-cd8f5030c357</OrderUuid>
        <DealerID>9527</DealerID>
        <Endkunde/>
        <Waehrung/>
        <Versandart>HOME</Versandart>
        <Anlieferung/>
        <Bestellweg/>
        <Bestellsoftware>
                <Softwaretyp>Web</Softwaretyp>
        </Bestellsoftware>
        <OrderTyp/>
        <ReklaGrund/>
        <Gutschein/>
        <BonID/>
        <SBA/>
        <tracking_id>WWPL69837</tracking_id>
        <tracking_url>http://www.dpost.be/Parceltracking/tracking/tockenno/sZvfx0zNtedQG
        UsMGE03IKeaFd7u-r6yVtkKkcLRSQM</tracking_url>
        <tracking_provider>WWPL</tracking_provider>
</OrderData>
```

Parameter	Description
tracking_id	The assigned tracking id of the carrier.
tracking_url	If the carrier provides a tracking link, it is included here.
tracking_provider	Name of the carrier Possible carriers: **DHL** **UPS** **Post AT** **ParcelPakket** **AUSTRIAN POST** **AUSTRIAN POST International** **Deutsche Post**