

①

cb ✓

f → serially read

{ parallelly
 async await


code → async await → 15min

3 → browser ↔ DOM → 10 Qu

②

F2, 2, 3 → promises fs.promises.readFile ()

f4, 5, 6 → callback fs.readFile (—, cb)

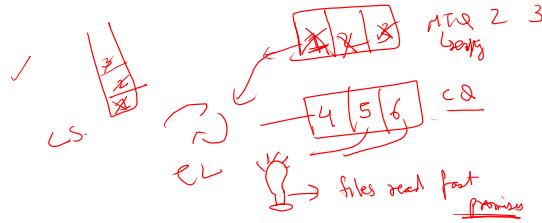

③

Async / await

1) easy syntax

↳ is promises, with easy syntax

synctactical sugar

↳ Mantti → X

↓
 promises → X

internally → Mantti

externally → Mercedes

internally promises

↓ Async / await
 ↳ externally async / await