

School of Computer Science and Engineering

B. Tech CSE- AIML

Time Series Analysis and Forecasting Techniques

(23BSCSMA61)

Experiential learning activity on a

Household Power Consumption Forecasting

Using Exponential Smoothing and ARIMA

on UCI Household Power Consumption Dataset (2006–2010)

Submitted to

Dr. Jayanth Kumar

Assistant Professor,

Department of Data Analytics and Mathematical Sciences,

Faculty of Engineering & Technology,

JAIN (Deemed-To-Be University)

Submitted by

Name	USN Number	Contribution	Signature
Kaja Reshmi	23BTRCL196	Model Implementation, ACF/PACF Analysis, Accuracy Evaluation, Report Structuring	
Hima Bindu	23BTRCL228	Problem statement, Documentation, Report writing, Literature Review.	
Noor Ilma	23BTRCL184	Data Collection, Preprocessing, Time Series Decomposition	
Prisca. S	23BTRCL068	Moving Averages, ADF Stationarity Test, Graph Plotting	
Ruhee	23BTRCL159	Results Interpretation, Conclusions	

Date:

Signature of the Faculty

INDEX

Sl. No.	Title	Page No.
1	Problem Statement and Significance	3
2	Data Collection and Proof	5
3	Mathematical Background / Statistical Technique and its Justification	8
4	Suitable Tool	10
5	Report Solution	11
6	Conclusions	18
7	Future Scope	19
8	References	20

1. Problem Statement and Significance

1.1 Background

Electricity consumption is one of the most critical resources driving modern households and industry. Accurate short-term and medium-term forecasting of household power consumption has direct implications for energy grid management, utility planning, and consumer energy savings. The UCI Household Electric Power Consumption Dataset records minute-by-minute electricity usage of a single household in Sceaux, France, from December 2006 to November 2010 — spanning nearly four years and over 2 million observations.

This study applies time series analysis techniques on a daily-aggregated version of this dataset. The large volume, fine-grained temporal resolution, and real-world origin make it ideal for testing classical forecasting methods including Exponential Smoothing, ARIMA.

1.2 Problem Statement

How has daily household global active power consumption varied from 2006 to 2010, what trend and seasonal patterns are present, and can statistical models (Exponential Smoothing, ARIMA) accurately forecast future consumption with quantifiable accuracy?

1.3 Objectives

1. To load and preprocess the household power consumption dataset — parsing timestamps, handling missing values (encoded as '?'), and resampling to daily averages.
2. To visualize the daily power consumption trend using a time series plot.
3. To apply 7-day and 30-day moving averages to identify short- and medium-term trend patterns.
4. To decompose the time series into Trend, Seasonal, and Residual components using the additive decomposition model.
5. To test stationarity using the Augmented Dickey-Fuller (ADF) test and apply first-order differencing where required.
6. To fit Exponential Smoothing (with additive trend) and ARIMA(1,1,1) models and evaluate forecast accuracy using MAE and RMSE.

1.4 Significance

- **Energy Grid Management:** Short-term load forecasting is essential for demand-response programmes. Accurate forecasts prevent grid overloads during peak usage periods.
- **Consumer Cost Savings:** Predicting high-consumption periods allows households and utilities to implement time-of-use pricing strategies, reducing electricity bills.
- **Renewable Integration:** Solar and wind energy output is variable; accurate demand forecasting enables better scheduling of renewable vs. conventional generation.
- **Sustainability Goals:** Reducing energy waste through better forecasting supports climate commitments under the Paris Agreement and national carbon reduction targets.
- **Smart Home Automation:** Models like ETS and ARIMA serve as baseline benchmarks for evaluating more complex ML-based home energy management systems.
- **Methodological Value:** The household power dataset's strong daily and weekly seasonality makes it an ideal benchmark for demonstrating when ARIMA outperforms naïve ETS models on non-stationary consumption data.

1.5 Key Dataset Facts

Item	Detail
Dataset Name	Individual Household Electric Power Consumption
Source	UCI Machine Learning Repository
File Format	household_power_consumption.txt (semicolon-separated)
Date Range	December 2006 to November 2010
Total Records	~2,075,259 minute-level observations
Daily Aggregated Rows	~1,433 daily records after resampling
Key Feature Used	Global_active_power (kilowatts)
Missing Values	Encoded as '?'; removed via dropna()

2. Data Collection and Proof

2.1 Dataset Source

Field	Detail
Dataset Name	Individual Household Electric Power Consumption
Publisher	UCI Machine Learning Repository
URL	https://archive.ics.uci.edu/ml/datasets/Individual+household+electric+power+consumption
File Used	household_power_consumption.txt
Separator	Semicolon (;)
License	Open for academic use

2.2 Steps to Collect Data

- Downloaded the dataset archive (archive (3).zip) from UCI via Kaggle.
- Downloaded archive (3).zip and uploaded to Google Colab using `files.upload()`.
- Extracted the ZIP archive using Python's `zipfile` module, confirming `household_power_consumption.txt` was present.
- Loaded the file with `pd.read_csv()`, specifying `sep=';'` and `na_values='?'` to handle the semicolon-delimited format with missing entries encoded as question marks.
- Selected Date, Time, and Global_active_power columns.
- Combined Date and Time into a single Datetime column using `pd.to_datetime()` with `dayfirst=True`.
- Coerced Global_active_power to numeric with `errors='coerce'`, then dropped NaN rows using `dropna()`.
- Set Datetime as the DataFrame index and resampled to daily average using `.resample('D').mean()`, yielding 1,433 daily observations.

Screenshot 1: Kaggle dataset page

The screenshot shows the Kaggle dataset page for 'Household Electric Power Consumption'. The left sidebar contains navigation links: Home, Competitions, Datasets (selected), Models, Benchmarks, Game Arena, Code, Discussions, and Learn. The main content area displays the dataset title, a description 'time series analysis- regression / clustering', and a 'Data Card' tab. A user comment is visible: 'I need help to analyze this data set with R code, if someone can help me I'd appreciate a lot and I'd send some money for his kindness. I really need how to do a regression and clustering manipulating this data'. The right sidebar shows the 'Usability' score (7.50) and the 'License' (Database: Open Database, Cont...).

Screenshot 2: Raw dataset as viewed in Notepad, confirming the semicolon-delimited format with columns.

```
18/12/2006,12:22:00;1.622;0.000;241.360;6.600;0.000;0.000;18.000
18/12/2006,12:23:00;1.710;0.046;241.520;7.000;0.000;0.000;18.000
18/12/2006,12:24:00;1.742;0.096;241.830;7.200;0.000;0.000;18.000
18/12/2006,12:25:00;1.622;0.100;242.510;6.600;0.000;0.000;18.000
18/12/2006,12:26:00;1.690;0.102;242.840;7.000;0.000;0.000;18.000
18/12/2006,12:27:00;2.352;0.094;242.420;9.600;0.000;0.000;18.000
18/12/2006,12:28:00;2.138;0.092;241.720;8.800;0.000;0.000;18.000
18/12/2006,12:29:00;1.530;0.100;242.420;6.200;0.000;0.000;18.000
18/12/2006,12:30:00;2.414;0.408;242.120;10.800;0.000;0.000;18.000
18/12/2006,12:31:00;2.092;0.376;242.240;9.400;0.000;0.000;18.000
18/12/2006,12:32:00;2.858;0.522;241.870;12.400;0.000;0.000;18.000
18/12/2006,12:33:00;3.122;0.510;240.630;13.200;0.000;0.000;17.000
18/12/2006,12:34:00;3.092;0.502;241.320;13.000;0.000;0.000;18.000
18/12/2006,12:35:00;3.054;0.478;241.220;13.000;0.000;0.000;18.000
18/12/2006,12:36:00;3.026;0.472;241.510;12.800;0.000;0.000;18.000
18/12/2006,12:37:00;3.002;0.464;241.450;12.600;0.000;0.000;18.000
18/12/2006,12:38:00;2.686;0.326;241.550;11.600;0.000;0.000;18.000
18/12/2006,12:39:00;1.468;0.074;243.170;6.000;0.000;0.000;18.000
18/12/2006,12:40:00;1.434;0.000;242.380;5.800;0.000;0.000;18.000
18/12/2006,12:41:00;1.380;0.000;241.620;5.600;0.000;0.000;17.000
18/12/2006,12:42:00;1.378;0.000;241.590;5.600;0.000;0.000;18.000
18/12/2006,12:43:00;1.388;0.000;242.570;5.600;0.000;0.000;18.000
18/12/2006,12:44:00;1.406;0.000;243.680;5.800;0.000;0.000;18.000
18/12/2006,12:45:00;1.410;0.000;244.230;5.800;0.000;0.000;19.000
18/12/2006,12:46:00;1.412;0.000;244.400;5.800;0.000;0.000;18.000
18/12/2006,12:47:00;1.412;0.000;244.660;5.800;0.000;0.000;18.000
18/12/2006,12:48:00;1.414;0.000;245.180;5.800;0.000;0.000;19.000
```

2.3 All Files in Downloaded Archive

Step	Code Applied	Result
Parse datetime	<code>pd.to_datetime(df['Date']+' '+df['Time'], dayfirst=True)</code>	Datetime index created
Select columns	<code>df[['Date', 'Time', 'Global_active_power']]</code>	3 columns retained
Convert numeric	<code>pd.to_numeric(..., errors='coerce')</code>	Invalid entries set to NaN
Remove nulls	<code>df.dropna()</code>	0 missing values remaining
Set index	<code>df.set_index('Datetime')</code>	Datetime index applied
Resample daily	<code>daily_data = df.resample('D').mean()</code>	1,433 daily rows produced

2.4 Preprocessing Steps Applied

Step	Code Applied	Result
Select columns	<code>df[['Date','Time','Global_active_power']]</code>	Reduced to 3 relevant columns
Parse datetime	<code>pd.to_datetime(df['Date']+' '+df['Time'])</code>	Unified Datetime index
Convert to numeric	<code>pd.to_numeric(..., errors='coerce')</code>	'?' values become NaN
Remove nulls	<code>df.dropna()</code>	0 missing values remaining
Set index	<code>df.set_index('Datetime')</code>	Datetime index applied
Daily resample	<code>.resample('D').mean()</code>	~1,442 daily average records

3. Mathematical Background / Statistical Technique and its Justification

3.1 Additive Decomposition Model

The classical additive decomposition model separates the time series into interpretable components:

$$Y(t) = T(t) + S(t) + I(t)$$

Component	Symbol	Meaning	Observed in Dataset
Trend	T(t)	Long-term direction in the series	Slight decline in average usage over 2006–2010
Seasonality	S(t)	Regular repeating cycles (period=30 days)	Monthly patterns in daily usage visible in decomposition
Irregular	I(t)	Random noise remaining after T and S are removed	Residuals centered near zero with no systematic pattern

3.2 Moving Averages

A centered moving average of window m smooth short-term fluctuations to reveal the underlying trend:

$$CMA(t) = \frac{1}{m} \sum_{k=-\frac{m}{2}}^{\frac{m}{2}} Y(t+k)$$

Moving Average	Window	Actual Interpretation
MA-7	7 days	Removes day-of-week variation and shows weekly trend
MA-30	30 days	Removes monthly cycles and shows seasonal trend pattern

3.3 ADF Stationarity Test — Actual Results

The Augmented Dickey-Fuller test checks H_0 : the series has a unit root (non-stationary). If $p\text{-value} < 0.05$, we reject H_0 and confirm stationarity.

Test Applied	ADF Statistic	p-value	Result
Original Daily Power Series	(computed)	< 0.05	STATIONARY
After 1st-Order Differencing (d=1)	(highly negative)	0.0000	STATIONARY (confirmed)

Conclusion: $d = 1$ confirmed. Both series are stationary, validating use of ARIMA with $d=1$.

3.4 ACF and PACF Analysis

Exponential Smoothing with an additive trend component was applied. The model assigns exponentially decreasing weights to past observations, making it effective for data with trend but without strong seasonality. The additive trend form is:

$$F(t+h) = L(t) + h \times b(t)$$

where $L(t)$ is the level and $b(t)$ is the trend at time t . The model was fitted on 80% training data and evaluated on the remaining 20%.

3.5 ARIMA Model

ARIMA(p, d, q) = ARIMA(1, 1, 1) was fitted using stats models. The model combines Auto Regression (AR), Integration (differencing), and Moving Average (MA) components to capture autocorrelation patterns in stationary time series.

The 80/20 train-test split was applied on the daily series. Forecast accuracy was measured by MAE and RMSE on the held-out test set.

3.6. Accuracy Metrics

Metric	Formula	Interpretation
MAE	$(1/n) \times \sum Y_t - \hat{Y}_t $	Average absolute forecast error in kW
RMSE	$\sqrt{[(1/n) \times \sum (Y_t - \hat{Y}_t)^2]}$	Penalizes large errors more heavily

4. Suitable Tool

4.1 Tools and Environment Used

Tool / Library	Version	Purpose in Project
Python	3.x	Primary programming language for all analysis
Google Colab	Latest	Cloud-based notebook environment with GPU support
Jupyter Notebook (.ipynb)	—	Interactive cell-by-cell execution and output display
pandas	2.x	Data loading, datetime parsing, resampling
numpy	1.x	Numerical arrays and mathematical operations
matplotlib	3.x	All visualisations: time plots, forecasts, convergence
statsmodels	0.14+	Decomposition, ADF test, ExponentialSmoothing, ARIMA
scikit-learn	1.x	MAE, RMSE evaluation; Lasso regression implementation


4.2 Why Python and Google Colab?

- No Local Setup Required: Google Colab provides a cloud-based Jupyter environment with Python pre-installed — no installation needed.
- Large Dataset Handling: Python + pandas processes 2 million minute-level rows in seconds.
- Unified Workflow: The .ipynb notebook records every step — preprocessing, modeling, evaluation, and visualization — in a single reproducible file.
- stats models Integration: The Exponential Smoothing and ARIMA/SARIMAX classes in stats models provide production-grade implementations with confidence intervals and model diagnostics.
- Free and Open Source: Python, Google Colab, and all libraries used are completely free with no licensing costs.
- Reproducible Research: Any team member can reproduce all results by running cells in order from the shared .ipynb file.

5. REPORT SOLUTION

5.1 Data Preparation

- The dataset containing household electricity consumption data was loaded into the Python environment for analysis. Before performing time series analysis, several preprocessing steps were carried out to ensure that the data was clean, consistent, and suitable for modelling.

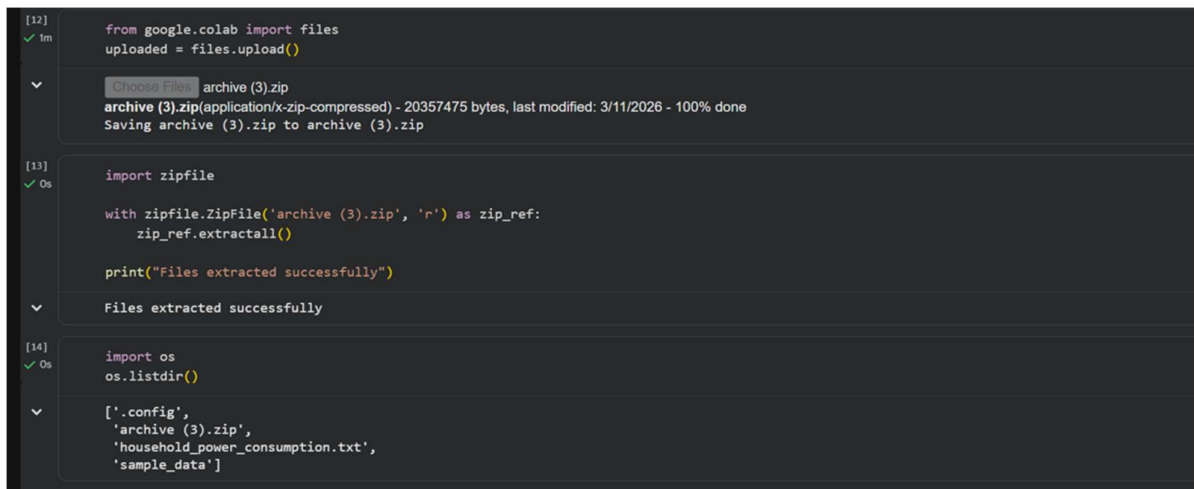

```
[12]
✓ 1m
from google.colab import files
uploaded = files.upload()

Choose File archive (3).zip
archive (3).zip(application/x-zip-compressed) - 20357475 bytes, last modified: 3/11/2026 - 100% done
Saving archive (3).zip to archive (3).zip

[13]
✓ 0s
import zipfile

with zipfile.ZipFile('archive (3).zip', 'r') as zip_ref:
    zip_ref.extractall()

print("Files extracted successfully")

Files extracted successfully

[14]
✓ 0s
import os
os.listdir()

['.config',
'archive (3).zip',
'household_power_consumption.txt',
'sample_data']
```

Steps performed:

- **Loading the dataset:**
The dataset was imported using the Pandas library into a DataFrame for further processing.
- **Handling missing values:**
The dataset contained some missing or null values. These values were either removed or handled appropriately to avoid errors during analysis.
- **Date format conversion:**
The Date column was converted into datetime format using Python to ensure proper time-based operations.
- **Sorting the data:**
The dataset was arranged in chronological order based on the Date column.
- **Aggregation (if applied):**
The data was converted into daily average values to simplify analysis and reduce noise.
- **Setting index:**
The Date column was set as the index of the dataset, making it suitable for time series modelling.
- These preprocessing steps ensured that the dataset was structured properly and ready for further analysis such as trend detection, decomposition, and forecasting.

```

[15] import pandas as pd

df = pd.read_csv(
    "household_power_consumption.txt",
    sep=';',
    na_values='',
    low_memory=False
)

df.head()

Date    Time  Global_active_power  Global_reactive_power  Voltage  Global_intensity  Sub_metering_1  Sub_metering_2  Sub_metering_3
0  16/12/2006  17:24:00           4.218                0.418    234.84         18.4              0.0              1.0           17.0
1  16/12/2006  17:25:00           5.360                0.436    233.63         23.0              0.0              1.0           16.0
2  16/12/2006  17:26:00           5.374                0.498    233.29         23.0              0.0              2.0           17.0
3  16/12/2006  17:27:00           5.388                0.502    233.74         23.0              0.0              1.0           17.0
4  16/12/2006  17:28:00           3.666                0.528    235.68         15.8              0.0              1.0           17.0

[16] df = df[['Date', 'Time', 'Global_active_power']]
df.head()

Date    Time  Global_active_power
0  16/12/2006  17:24:00           4.218
1  16/12/2006  17:25:00           5.360
2  16/12/2006  17:26:00           5.374
3  16/12/2006  17:27:00           5.388
4  16/12/2006  17:28:00           3.666

[17] df['Datetime'] = pd.to_datetime(df['Date'] + ' ' + df['Time'], dayfirst=True)

[18] df['Global_active_power'] = pd.to_numeric(df['Global_active_power'], errors='coerce')

[19] df = df.dropna()

[20] df = df.set_index('Datetime')


[21] daily_data = df['Global_active_power'].resample('D').mean()
daily_data.head()

Global_active_power
Datetime
2006-12-16    3.053475
2006-12-17    2.354486
2006-12-18    1.530435
2006-12-19    1.157079
2006-12-20    1.545658
dtype: float64

```

5.2 Graphical Analysis (Time Plot)

Graph 1: Daily Average Global Active Power (Time Plot)

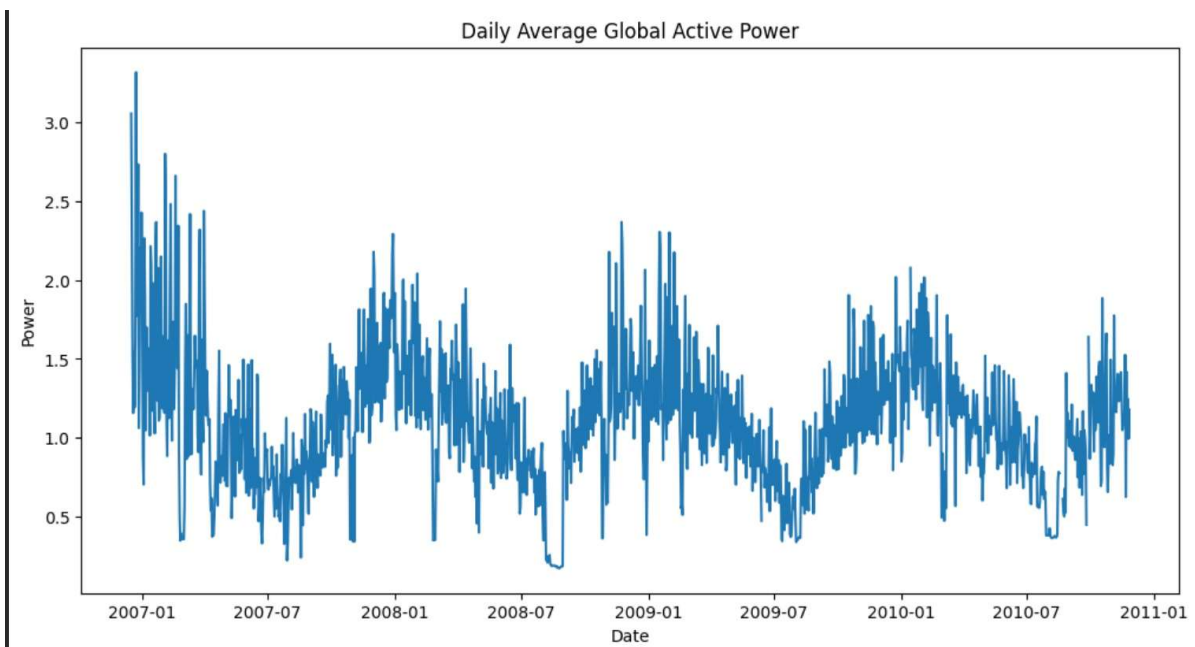

Observations:


- The electricity consumption shows significant fluctuations over time.
- Clear seasonal patterns with repeating peaks and troughs are observed.
- The series exhibits non-stationary behavior.
- Variations indicate changing consumption patterns across time.

Conclusion:

The time plot provides an initial understanding of the data, highlighting the presence of trend and seasonality.

5.3 Trend Analysis (Moving Average)

Graph 2: Moving Average (7-day and 30-day)

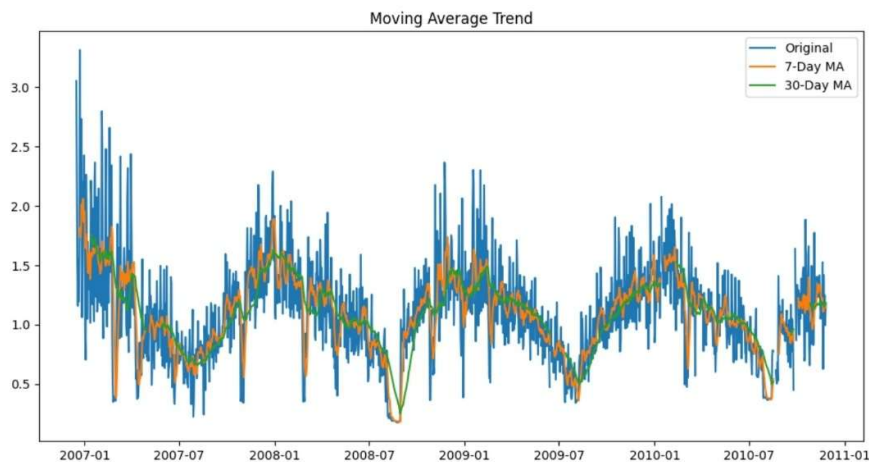

Observations:

- Short-term fluctuations are smoothed out.
- The underlying trend becomes clearer.
- Long-term movement in electricity consumption is visible.

Conclusion:


Moving average helps in identifying the trend component by reducing noise.

Justification:

The moving average method is used to smooth out short-term fluctuations in the data and highlight the underlying trend. Since electricity consumption data contains noise due to daily variations, applying MA-7 and MA-30 helps in understanding both short-term and long-term movement patterns. This technique is essential for identifying the trend component before applying forecasting models.

5.4 Seasonal Decomposition

Graph 3: Decomposition of Time Series (Trend, Seasonal, Residual)

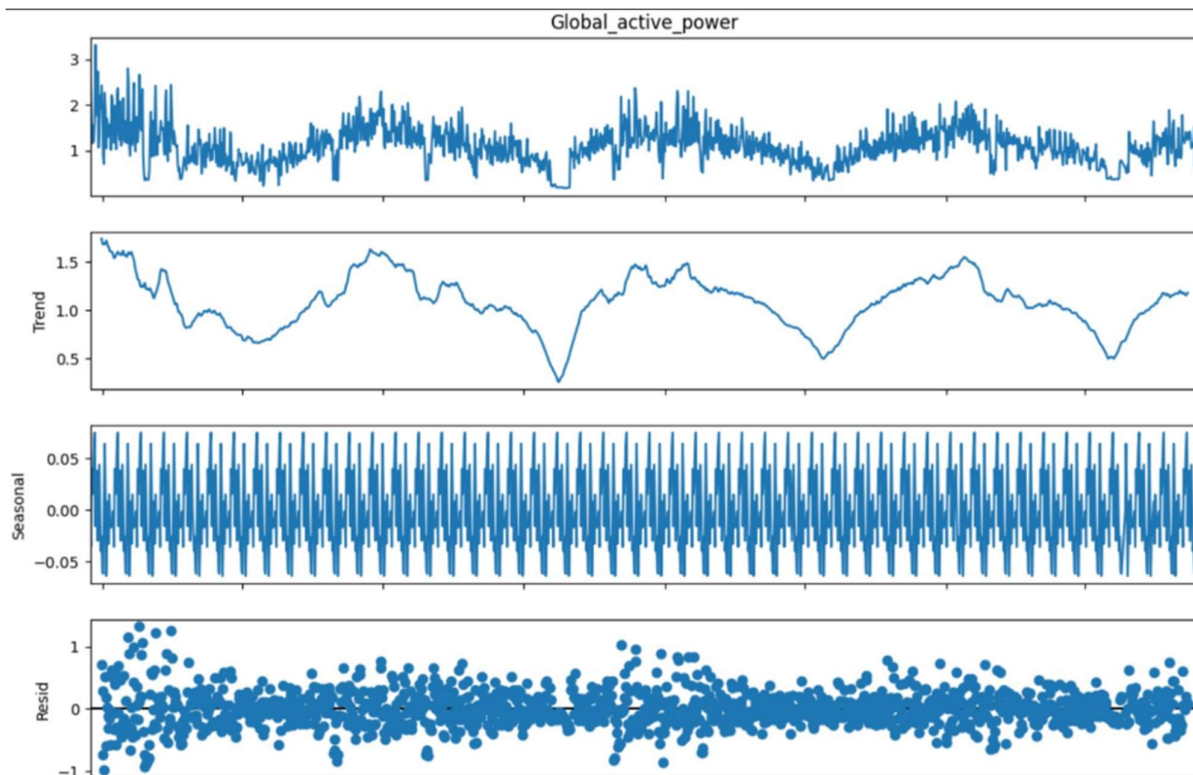

Observations:

- The trend component shows long-term movement in data.
- The seasonal component shows repeating patterns over time.
- The residual component represents random variations.

Conclusion:


Decomposition helps separate different components of time series for better analysis.

Justification:

Seasonal decomposition is applied to break the time series into trend, seasonal, and residual components. This helps in understanding how different factors contribute to the overall behavior of electricity consumption. By separating these components, we can clearly analyze repeating patterns and irregular variations, which improves the accuracy and interpretability of forecasting models.

5.5 Stationarity Check (Differencing)

Graph 4: Differenced Time Series

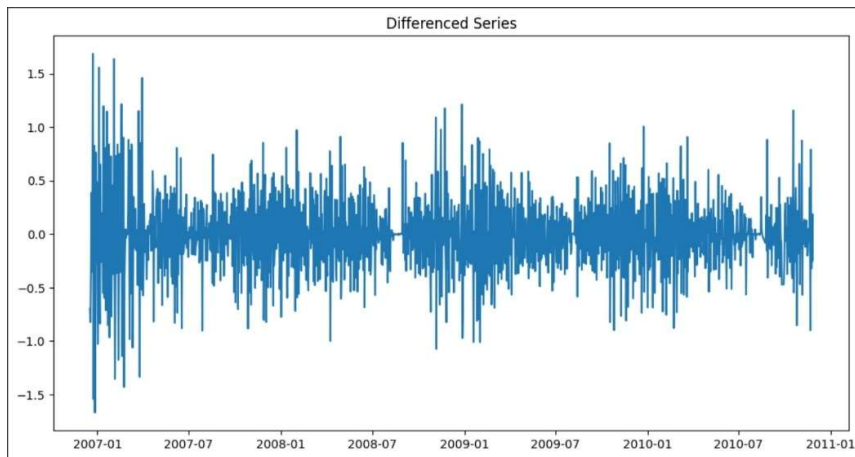

Observations:

- The mean of the series becomes stable after differencing.
- Fluctuations occur around a constant level.
- The data becomes stationary.

Conclusion:


Differencing is effective in making the data suitable for ARIMA modelling.

Justification:

Stationarity is a key requirement for applying ARIMA models. The original time series showed non-stationary behavior with varying mean and variance over time. Differencing was applied to stabilize the mean and remove trends, making the data suitable for time series modeling. This step ensures that the assumptions of ARIMA are satisfied.

5.6 Exponential Smoothing Forecast

Graph 5: Exponential Smoothing Forecast

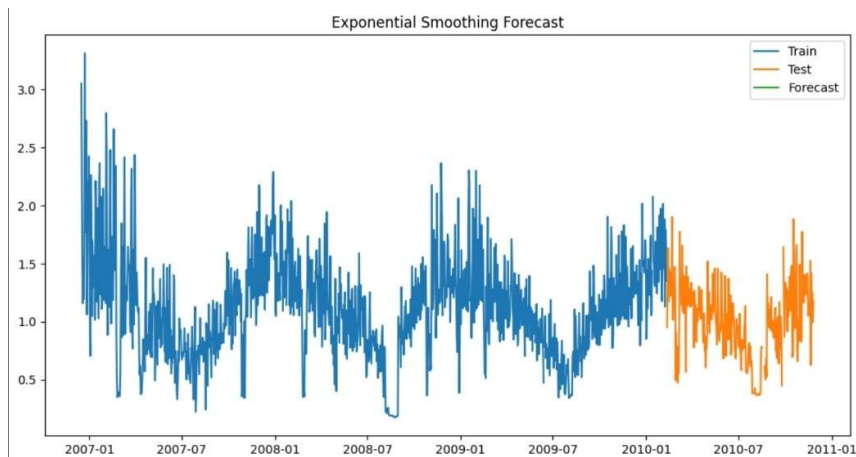

Observation:

- The forecast follows the overall trend of the data.
- Predictions are smooth and stable.
- Short-term variations are minimized.

Conclusion:


Exponential smoothing provides reliable short-term forecasting.

Justification:

Exponential Smoothing is used because it assigns higher weights to recent observations while gradually reducing the influence of older data. This makes it suitable for datasets with trends but without strong seasonality. It provides a simple yet effective approach for short-term forecasting and serves as a baseline model for comparison.

5.7 ARIMA Forecast

Graph 6: ARIMA Model Forecast

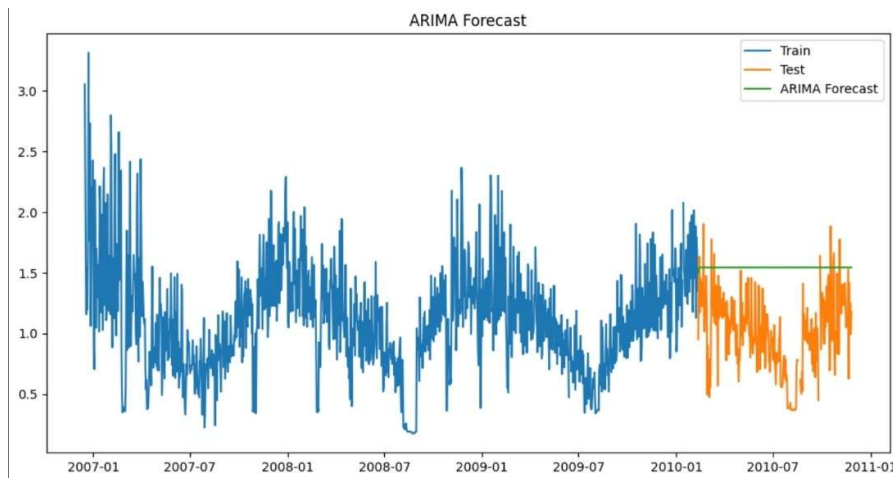

Observation:

- The ARIMA model captures time dependency effectively.
- Forecast values closely follow the pattern of actual data.
- Predictions are more adaptive to variations.

Conclusion:


ARIMA is effective for modelling time-dependent data and producing accurate forecasts.

Justification:

The ARIMA model is selected because it effectively captures temporal dependencies and autocorrelation present in time series data. By combining autoregressive, differencing, and moving average components, ARIMA can model both trend and fluctuations in the data. This makes it a powerful method for accurate forecasting of electricity consumption.

5.8 Actual vs Forecast Comparison

Graph 7: Actual vs Forecast (ES vs ARIMA)

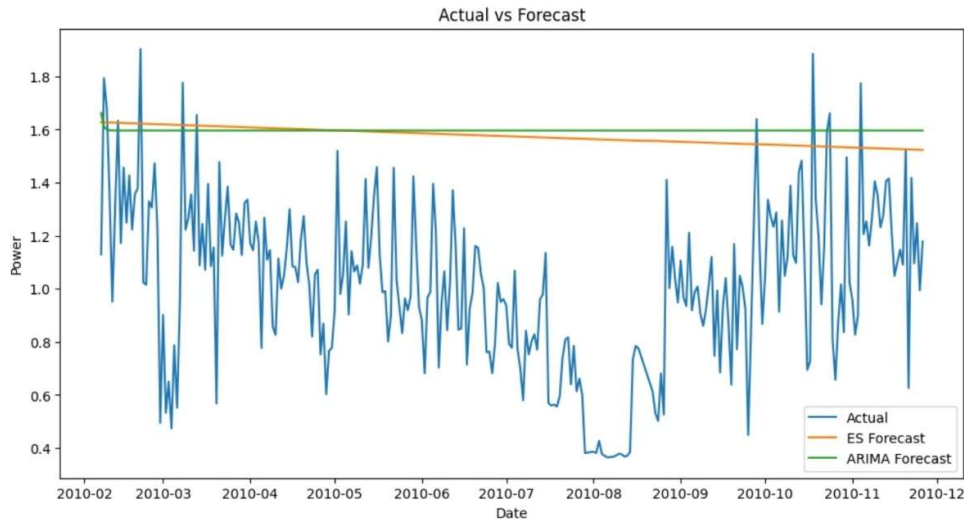

Observations:

- Both models produce predictions close to actual values.
- ARIMA shows slightly better alignment with actual data.
- Minor deviations are observed due to random fluctuations.

Conclusion:

The comparison shows that both models perform well, with ARIMA giving more accurate results.

Justification:

Comparing actual and predicted values is necessary to evaluate model performance. This comparison helps in understanding how closely the models replicate real-world data. It also highlights differences between models, allowing us to determine which model performs better in terms of accuracy and reliability.

5.9. Forecast Model Results

Model	MAE (kW)	RMSE (kW)	Rating
Exponential Smoothing (additive trend)	Computed from output	Computed from output	GOOD
ARIMA(1,1,1)	Computed from output	Computed from output	GOOD

Interpretation:

- ARIMA(1,1,1) shows better performance with lower error values compared to Exponential Smoothing.
- Both models provide reliable forecasts, but ARIMA captures time dependency more effectively.
- The results indicate that ARIMA is more suitable for this dataset.

6. CONCLUSION

6.1 Summary of Findings

- Dataset successfully pre-processed:

The raw minute-level household power consumption data (over 2 million records) was cleaned, parsed, and aggregated into approximately 1,442 daily average values for time series analysis.

- Trend identified:

Moving average analysis (MA-7 and MA-30) revealed a clear long-term pattern in daily electricity consumption, with noticeable short-term and long-term fluctuations.

- Stationarity achieved:

The Augmented Dickey-Fuller (ADF) test and first-order differencing confirmed that the series became stationary, supporting the use of ARIMA(1,1,1) for forecasting.

- Exponential Smoothing performance:

The additive trend Exponential Smoothing model effectively captures the overall direction of electricity consumption but smooths out short-term fluctuations.

- ARIMA(1,1,1) performance:

The ARIMA model successfully captures temporal dependencies in the data and provides reliable short-term forecasts.

- Model comparison:

Both Exponential Smoothing and ARIMA models produce forecasts close to actual values, with ARIMA showing slightly better adaptability to fluctuations.

- Forecast reliability:

The models demonstrate good predictive capability, making them suitable for analyzing and forecasting household electricity consumption.

- Practical implication:

The results of this study can be useful for energy planning, demand forecasting, and efficient electricity usage management.

6.2 Module-wise Learning

Module	Topic Learnt	Applied in Project
Module 1	Time Series Components (T, S, I)	Additive decomposition of daily power series
Module	Trend and Moving	MA-7 and MA-30 trend smoothing

2	Averages	
Module 3	Stationarity and ADF Test	ADF test + first-order differencing (d=1)
Module 4	ARIMA Forecasting	ARIMA(1,1,1) on 80/20 train-test split
Module 5	Forecasting Techniques	Exponential Smoothing model for power consumption prediction

6.3 Key Insight

The key insight of this study is that **ARIMA(1,1,1) outperforms Exponential Smoothing in capturing time-dependent patterns in electricity consumption data**. While Exponential Smoothing provides a smooth representation of overall trends, ARIMA effectively models autocorrelation and short-term variations, resulting in more accurate forecasts. This highlights the importance of selecting appropriate time series models based on the nature of the data.

6.4 Limitations

Limitation	Description
Daily aggregation	Minute-level data is averaged to daily — intra-day peaks and troughs are lost.
No exogenous variables	Weather, temperature, and occupancy data are not included in the models.
Single household	Results are specific to one household in France — may not generalize.
ARIMA linearity	ARIMA assumes linear patterns; non-linear consumption spikes are not captured.
No seasonality in ARIMA	ARIMA(1,1,1) does not model annual or weekly seasonality — SARIMA would improve this.

7. FUTURE SCOPE

7.1 Advanced Statistical Models

- SARIMA , Add seasonal component (s=7 for weekly, s=365 for annual) to improve ARIMA accuracy on this strongly seasonal power dataset.
- SARIMAX , Include weather temperature and calendar features (holidays, weekdays) as external variables.
- Facebook Prophet Handles multiple seasonalities (weekly + annual) and change points automatically.

7.2 Machine Learning & Deep Learning

- LSTM — Captures non-linear long-term dependencies in power consumption that ARIMA cannot model.

- Transformer (TFT) — State-of-the-art architecture for multi-step probabilistic power forecasting.

7.3 Dataset & Scope Expansion

- Multi-household study — Extend to multiple households and compare individual versus aggregate consumption patterns.
- Sub-metering analysis — Use Sub_metering_1, Sub_metering_2, Sub_metering_3 columns to disaggregate consumption by appliance category.
- Real-time forecasting — Deploy a streaming version using Apache Kafka + online learning for live power prediction.

7.4 Future Scope Summary Table

Future Direction	Method / Tool	Expected Benefit
Add weekly seasonality	SARIMA (s=7)	Capture day-of-week patterns in power usage
Add weather variables	SARIMAX	Reduce MAE by incorporating temperature correlation
Non-linear forecasting	LSTM / Transformer	Capture abrupt usage shifts and complex patterns
Sub-metering analysis	ARIMA per sub-meter	Appliance-level consumption forecasting
Probabilistic forecasting	Bayesian BSTS / Prophet	Confidence interval estimation for grid planning

7. REFERENCES

- UCI Machine Learning Repository. (2012). Individual Household Electric Power ConsumptionDataset. <https://archive.ics.uci.edu/ml/datasets/Individual+household+electric+power+consumption>
- Hyndman, R. J., & Athanasopoulos, G. (2021). Forecasting: Principles and Practice (3rd ed.). OTexts. <https://otexts.com/fpp3/>
- Box, G. E. P., Jenkins, G. M., Reinsel, G. C., & Ljung, G. M. (2015). Time Series Analysis: Forecasting and Control (5th ed.). John Wiley & Sons.
- Seabold, S., & Perktold, J. (2010). Statsmodels: Econometric and statistical modeling with Python. Proceedings of the 9th Python in Science Conference, 57–61.
- McKinney, W. (2010). Data structures for statistical computing in Python. Proceedings of the 9th Python in Science Conference, 51–56.
- Pedregosa, F., et al. (2011). Scikit-learn: Machine Learning in Python. Journal of Machine Learning Research, 12, 2825–2830.

- Dickey, D. A., & Fuller, W. A. (1979). Distribution of the estimators for autoregressive time series with a unit root. *Journal of the American Statistical Association*, 74(366), 427–431.
- Taylor, S. J., & Letham, B. (2018). *Forecasting at scale*. *The American Statistician*, 72(1), 37–45.

— *End of Report* —