SIMATS ENGINEERING

Engineer to Excel

SIMATS

Saveetha Institute of Medical And Technical Sciences

(Declared as Deemed to be University under Section 3 of UGC Act 1956)

EXPERIMENT NO. 6

Name: C Himaja

Reg. No: 192373035

Execute and Display the Results for touch, pwd and wget Commands in Kali Linux

1. Aim

To execute and understand the touch, pwd, and wget commands in the Kali Linux operating system.

2. Requirements

Kali Linux, Terminal, and an internet connection for the wget example.

3. Algorithm / Procedure

1. Start Kali Linux and open the Terminal.
2. Create a working directory and move into it using: mkdir -p ~/ethical-lab && cd ~/ethical-lab
3. Execute the touch command to create an empty file.
4. Use ls to verify that the file has been created.
5. Execute pwd to display the current working directory.
6. Use wget with a publicly accessible test URL to download a webpage.
7. Observe the output and verify the downloaded file.


4. Commands and Explanation

A) touch

Command: touch sample.txt

Explanation: Creates an empty file named sample.txt if it does not exist. If the file already exists, touch updates its modification timestamp.


Verification command: ls

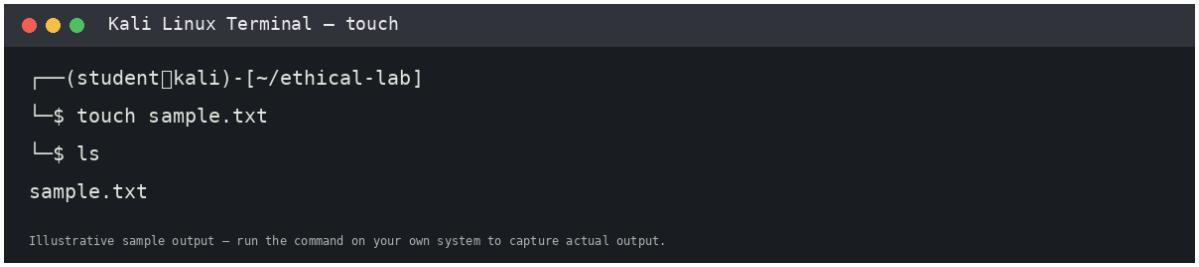

B) pwd

Command: pwd


Explanation: Displays the full path of the current working directory.

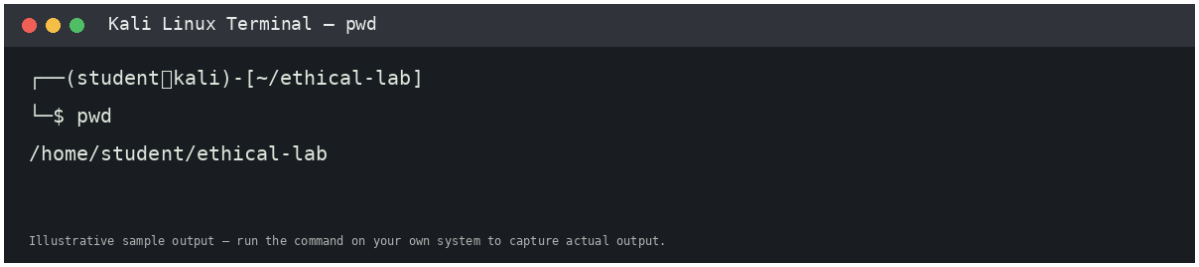

C) wget

Command: wget https://example.com/

Explanation: Downloads content from a URL. In this example, wget attempts to download the example.com webpage into a local file, usually named index.html. Internet access is required.

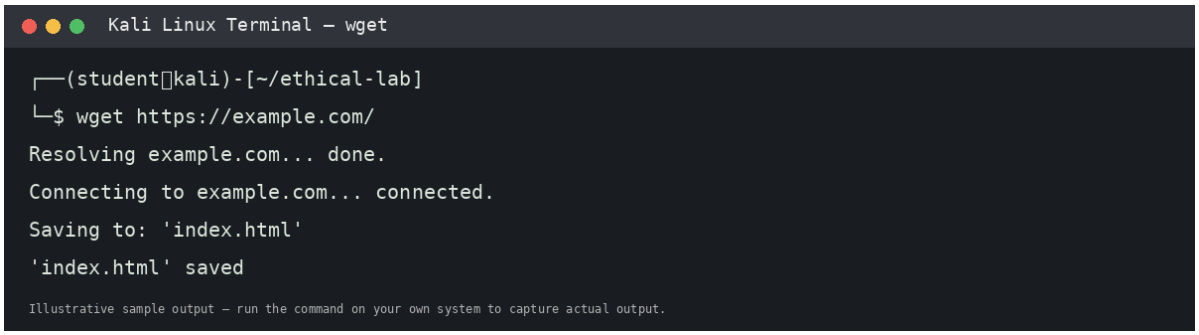

5. Result

The touch, pwd, and wget commands were described and their expected terminal outputs were demonstrated. The touch command creates a file, pwd displays the current directory, and wget downloads content from a URL.