


Amdocs OA Questions

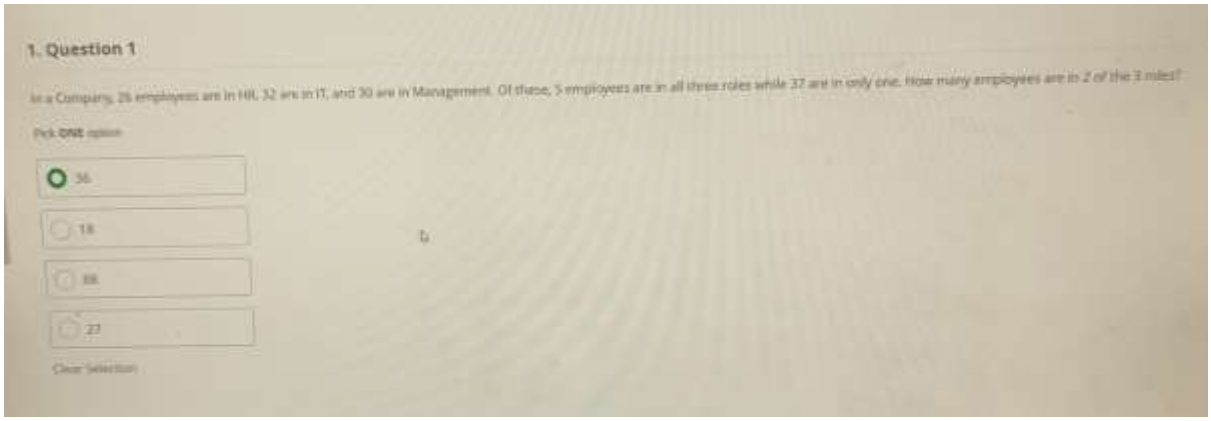

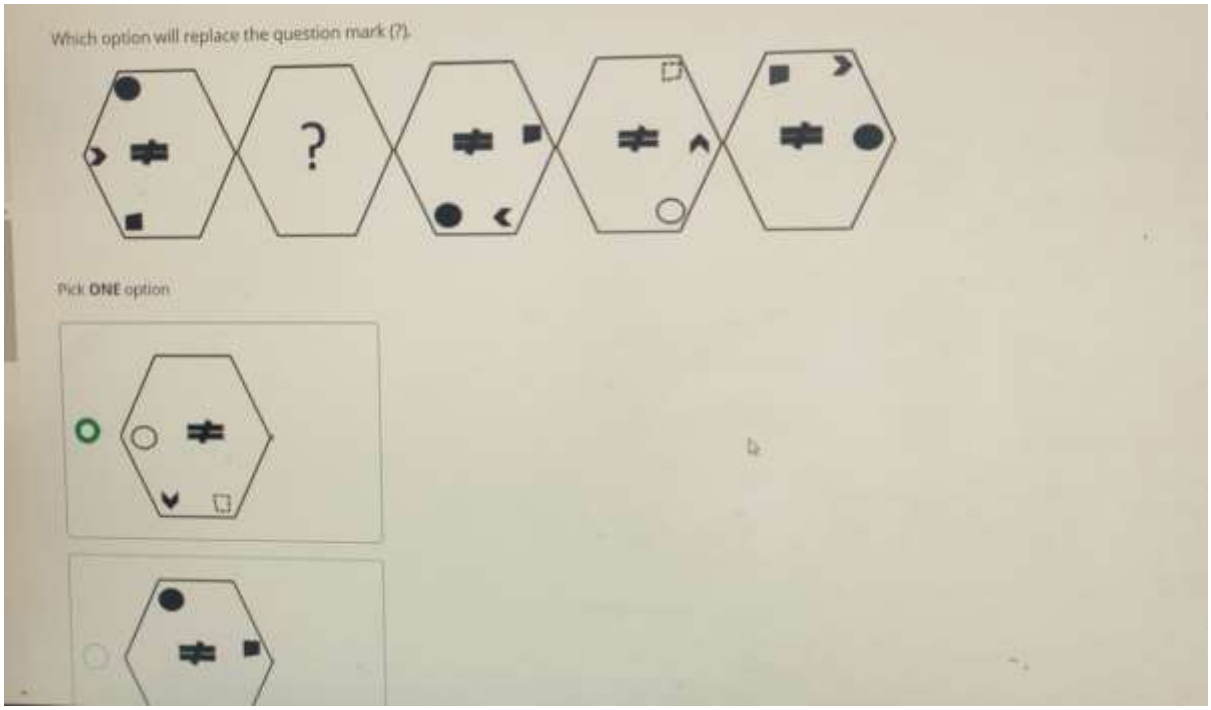

3. Question 3


Which unfolded figure might result in the folded figure?

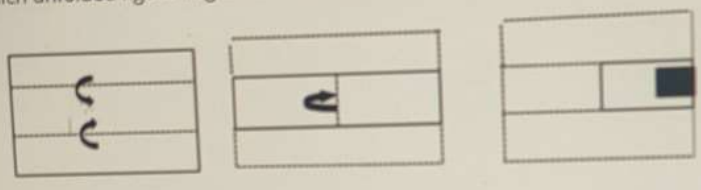

Pick **ONE** option





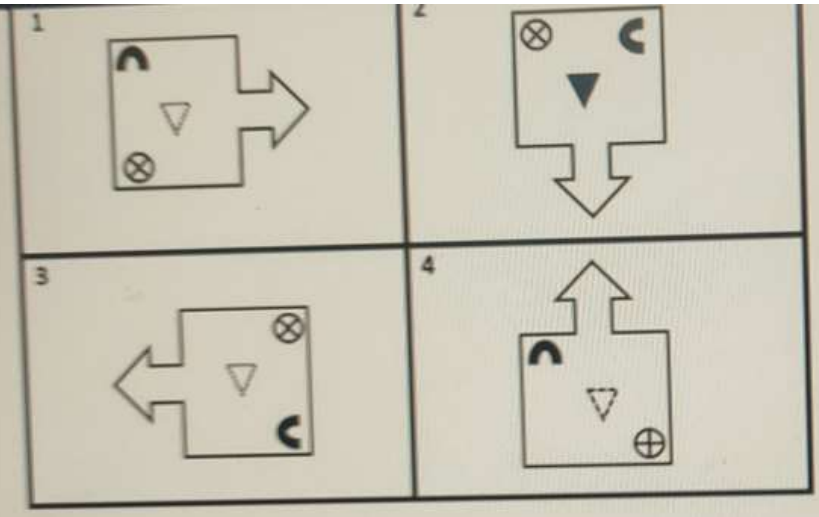

Which figure does not belong?

Pick **ONE** option

- 1
- 2
- 3
- 4

5. Question 5

"CURATED" is encoded as "UFEASVD". How would "AMAZING" be encoded?

Pick **ONE** option

- JOHZBNB
- HOJZBNB
- BNBZHOJ
- BNBJOH

Clear Selection

6. Question 6

The average time required to perform a successful sequential search for an element in an array A containing n elements is given by


Pick **ONE** option

- (n+1)/2
- $\log_2 n$
- n(n+1)/2
- n^2

Clear Selection

8. Question 8

Which of the paths is valid for a depth-first search from node 1?

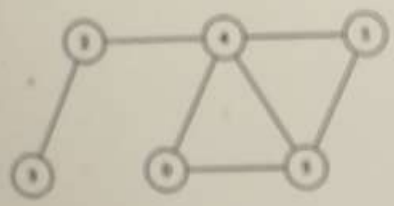

Pick **ONE** option

- 154230

7. Question 7

Evaluate the prefix expression : * + 2 - 2 1 / - 4 2 + - 5 3 1

Note that the integers are all less than 10. For example, 5 3 1 is three separate integers.

Pick **ONE** option

- (●) 2
- ( ) 10
- ( ) 12
- ( ) 4

Clear Selection

9. Question 9

In a virtual memory system that uses the Optimal page replacement policy, how many page faults will occur?

Number of frames = 4.
Reference: 1, 2, 3, 4, 4, 4, 5, 5, 3, 2, 1, 4, 2, 1, 5.

Pick **ONE** option

- (●) 7
- ( ) 8
- ( ) 6
- ( ) 5

Clear Selection

10. Question 10

Consider the following table of arrival and burst times for four processes P1, P2, P3, and P4.

Process	Burst Time	Arrival Time
1	5	0
2	1	3
3	8	2
4	4	4

The non-preemptive first come first serve scheduling algorithm is used. Scheduling is carried out only at the arrival or completion of processes. Find the average turn-around time for the processes.

Pick **ONE** option

- (O) 10.25
- ( ) 10.5
- ( ) 10.75

11. Question 11

In a virtual memory system that uses the Least Recently Used (LRU) page replacement policy, calculate the number of page faults.

Number of frames = 4
Reference strings: 1, 4, 3, 2, 1, 2, 6, 2, 1, 5, 6, 3, 2, 4, 5

Pick **ONE** option

- ( ) 8
- ( ) 9
- (O) 10
- ( ) 11

Clear Selection

12. Question 12

Given the arrival times, the burst times, and the priorities of 5 processes, calculate the average waiting time if they follow the Preemptive Priority scheduling algorithm.

Note: A lower value has a higher priority.

Process	Arrival Time	Burst Time	Priority
P1	0	7	4
P2	1	3	2
P3	2	1	1
P4	4	3	3
P5	7	2	5

Pick **ONE** option

- 6.4
- 6.8
- 7.0

13. Question 13

Which of the following statements is/are correct? Multiple answers may be correct.

Pick **ONE OR MORE** options

- [x] A prime attribute is an attribute that is a part of the candidate key.
- [x] A prime attribute is an attribute that is a part of the primary key.
- [x] A non-prime attribute is an attribute that is not a part of the prime key.
- [ ] None of these

Clear Selection

14. Question 14

What command should you try if DBMS_OUTPUT.PUT_LINE is not doing what it is supposed to do?

Pick **ONE** option

- ○ SET ECHO ON
- ○ SET DISPLAY ON
- ○ SET TERMOUT ON
- ● SET SERVEROUTPUT ON

Clear Selection

15. Question 15

What kind of joins is a default in SQL?

Pick **ONE** option

- ● Inner
- ○ Outer
- ○ Self
- ○ None of the above

Clear Selection

16. Question 16

Which of the following **anomalies is/are solved using normalization? Multiple answers may be correct.**

Pick **ONE OR MORE** options

- [ ] Creation anomalies
- [x] Insertion anomalies
- [x] Deletion anomalies
- [x] Update anomalies

Clear Selection

17. Question 17

Which of the function operator cannot be over loaded?

Pick **ONE** option

- ( ) <=
- ( ) >=
- (•) ?:
- ( ) ==
- ( ) *

Clear Selection

Is it possible to create an object of an empty class type such as:

```
class xyz
{};
```

If so, what is the size of such an object?

Pick **ONE** option

- ○ Yes, it is possible, and its size is zero.
- ● Yes, it is possible, and its size is greater than zero.
- ○ No, it is not possible to create an empty class; it results in a compiler error.
- ○ No, it results in a runtime error.

Clear Selection

19. Question 19


```
double read_double (FILE * fp) {
  double d;
  assert(fp != NULL);
  fscanf(fp, " %lf", d);
  return d;
}
```

The code above contains a common error. Which one of the following describes it?

Pick **ONE** option

- ○ fscanf() will fail to match floating-point numbers not preceded by whitespace.
- ● The format specifier %lf indicates that the corresponding argument should be long double rather than double.
- ○ The call to fscanf() requires a pointer as its last argument.
- ○ The format specifier %lf is recognized by fprintf() but not by fscanf().
- ○ d must be initialized prior to usage.

Clear Selection

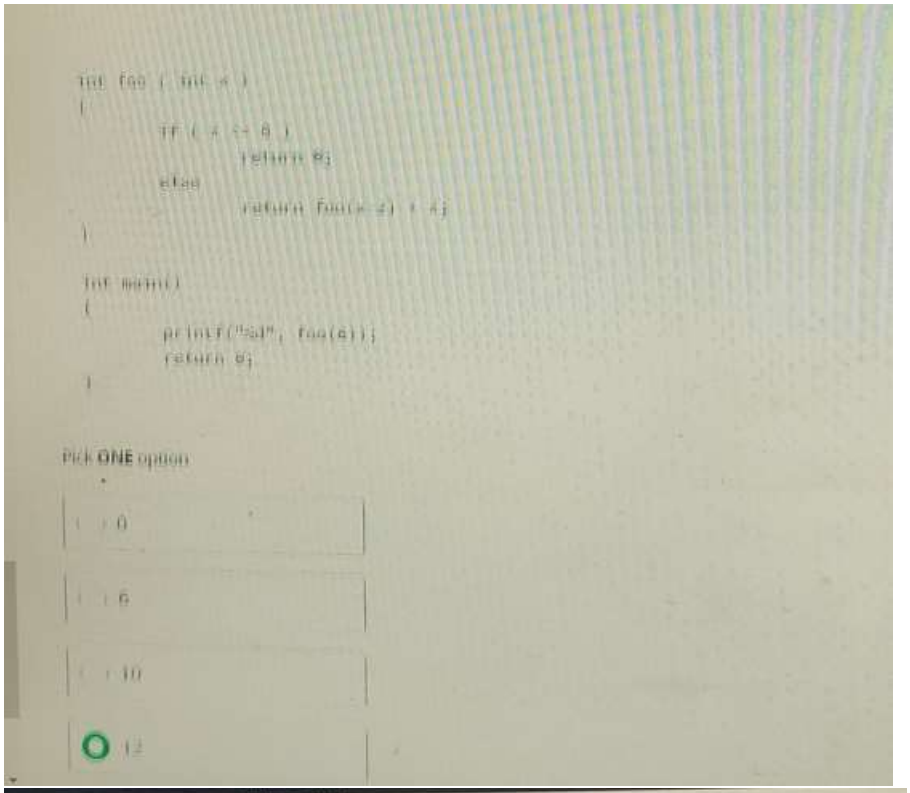


```
int foo ( int x )
{
        if ( x == 0 )
                return 0;
        else
                return foo(x-2) + x;
}

int main()
{
        printf("%d", foo(6));
        return 0;
}
```

Pick **ONE** option

- 0
- 6
- 10
- 12

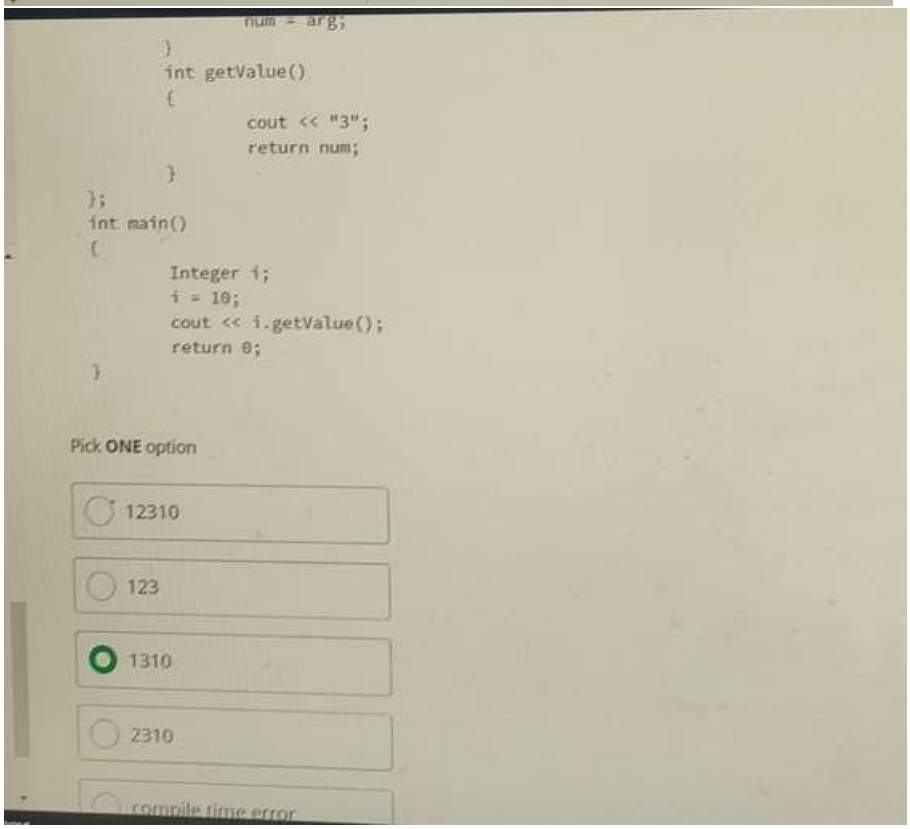

```
                num = arg;
        }
        int getValue()
        {
                cout << "3";
                return num;
        }
};
int main()
{
        Integer i;
        i = 10;
        cout << i.getValue();
        return 0;
}
```

Pick **ONE** option

- 12310
- 123
- 1310
- 2310
- compile time error

22. Question 22

Select the extraneous expression (not the same as the others).

Pick **ONE** option

- ○ SELECT * FROM categories ORDER BY id
- ○ SELECT * FROM categories ORDER BY id ASC
- ◉ SELECT * FROM categories ORDER BY id DESC
- ○ None of the above, all expressions are the same.

Clear Selection


23. Question 23

Which of the following statement(s) are **NOT** correct:


Pick **ONE OR MORE** options

- ☐ The PRIMARY KEY must be unique and not null for each table.
- ☐ The DROP command is used to remove the table definition and its contents whereas the TRUNCATE command is used to delete all the rows from the table.
- ☑ DELETE command is a DDL command whereas DROP is a DML command.
- ☑ ACID properties in databases refer to Atomicity, Complexity, Isolation, and Duplicacy.


Clear Selection

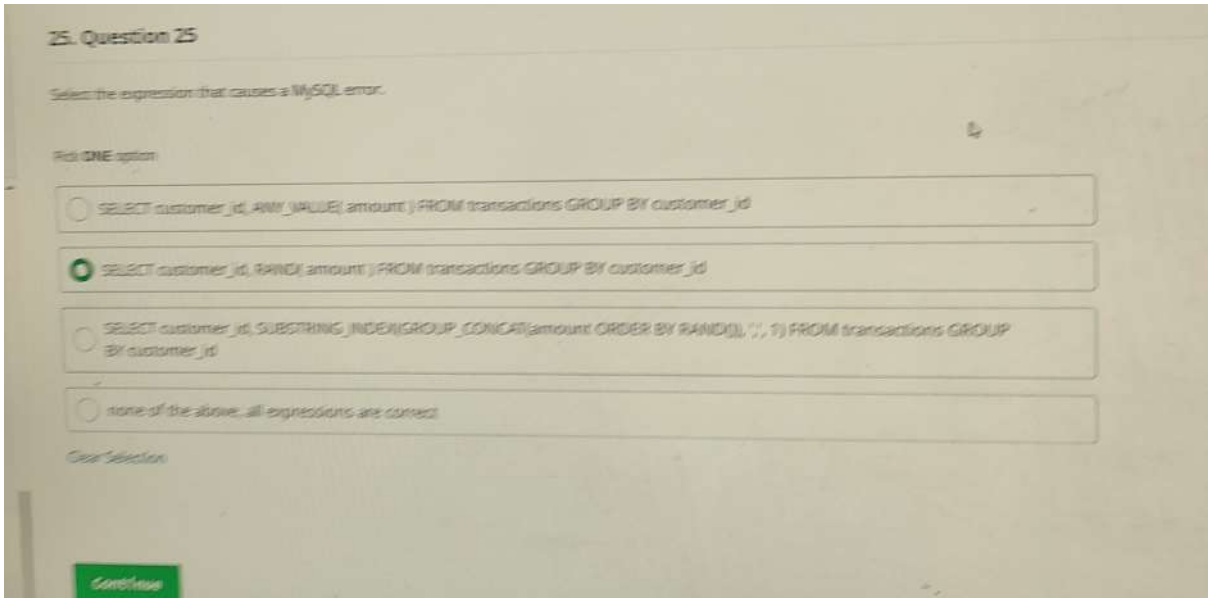


PART 2

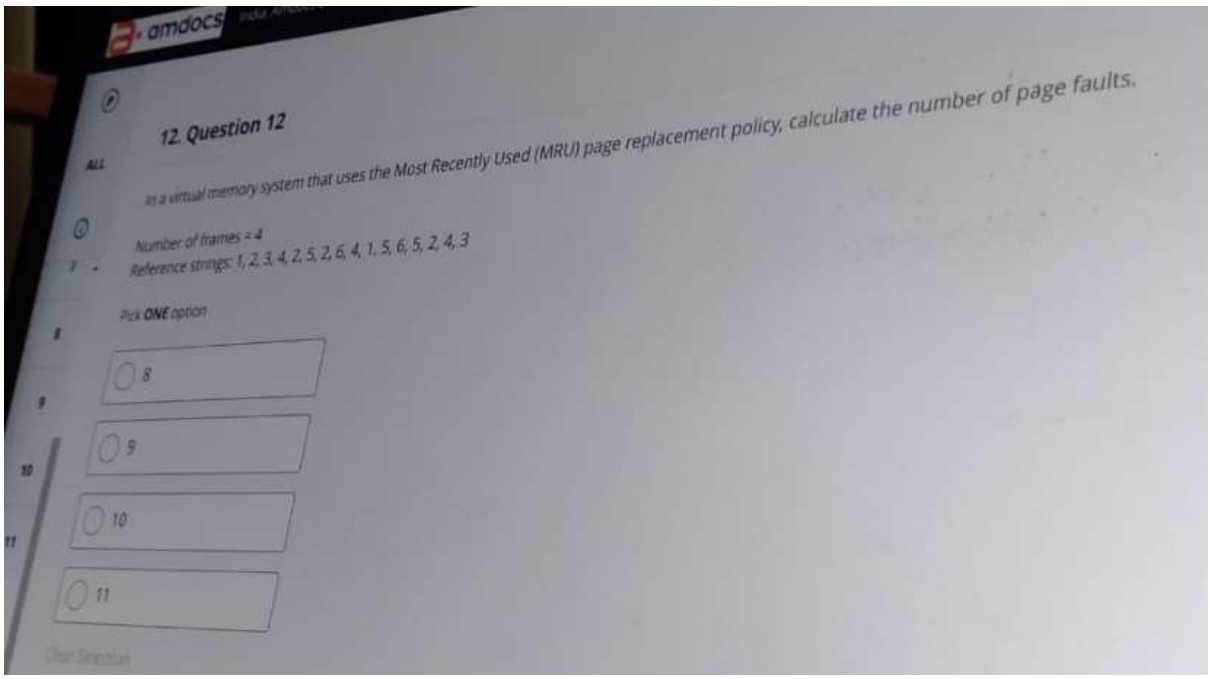


Answer : **b) 9**

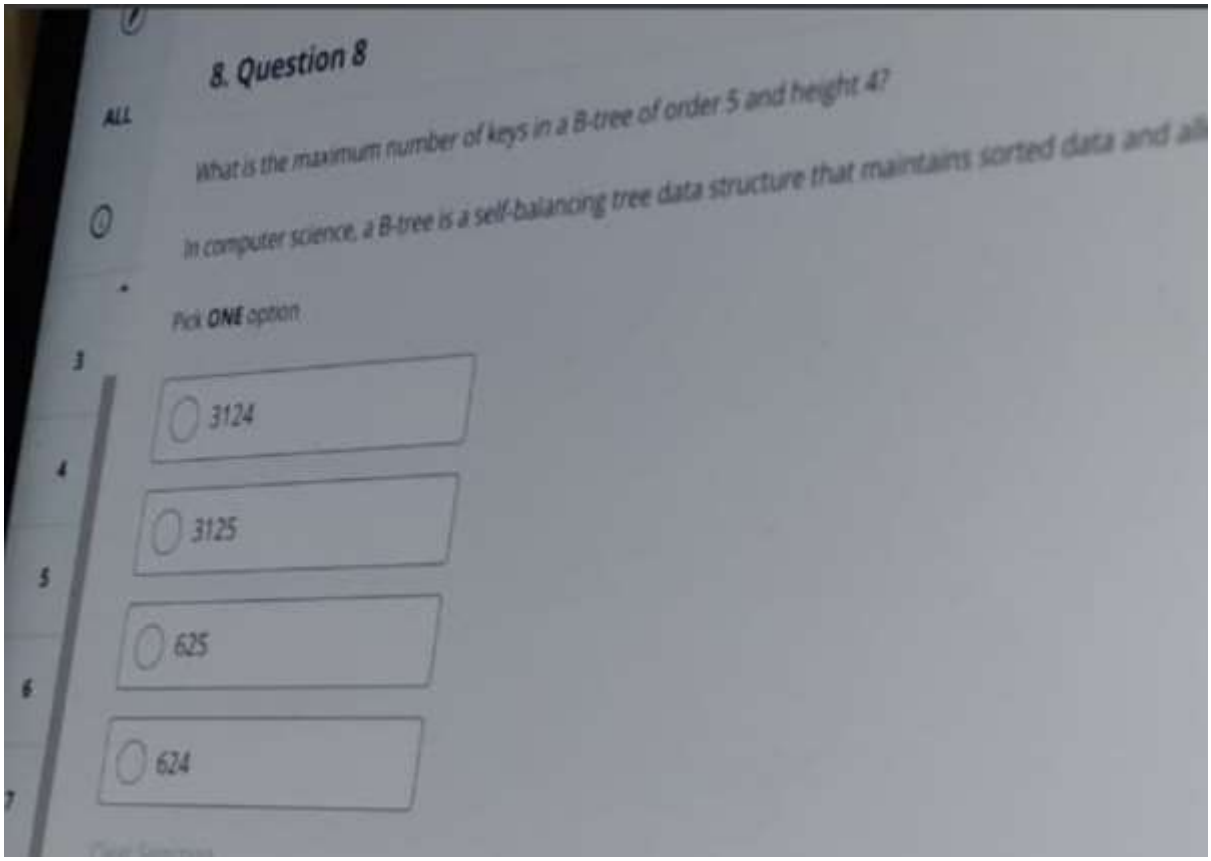
8. Question 8
What is the maximum number of keys in a B-tree of order 5 and height 4?
In computer science, a B-tree is a self-balancing tree data structure that maintains sorted data and all
Pick ONE option
3124
3125
625
624


Answer: **d) 624**

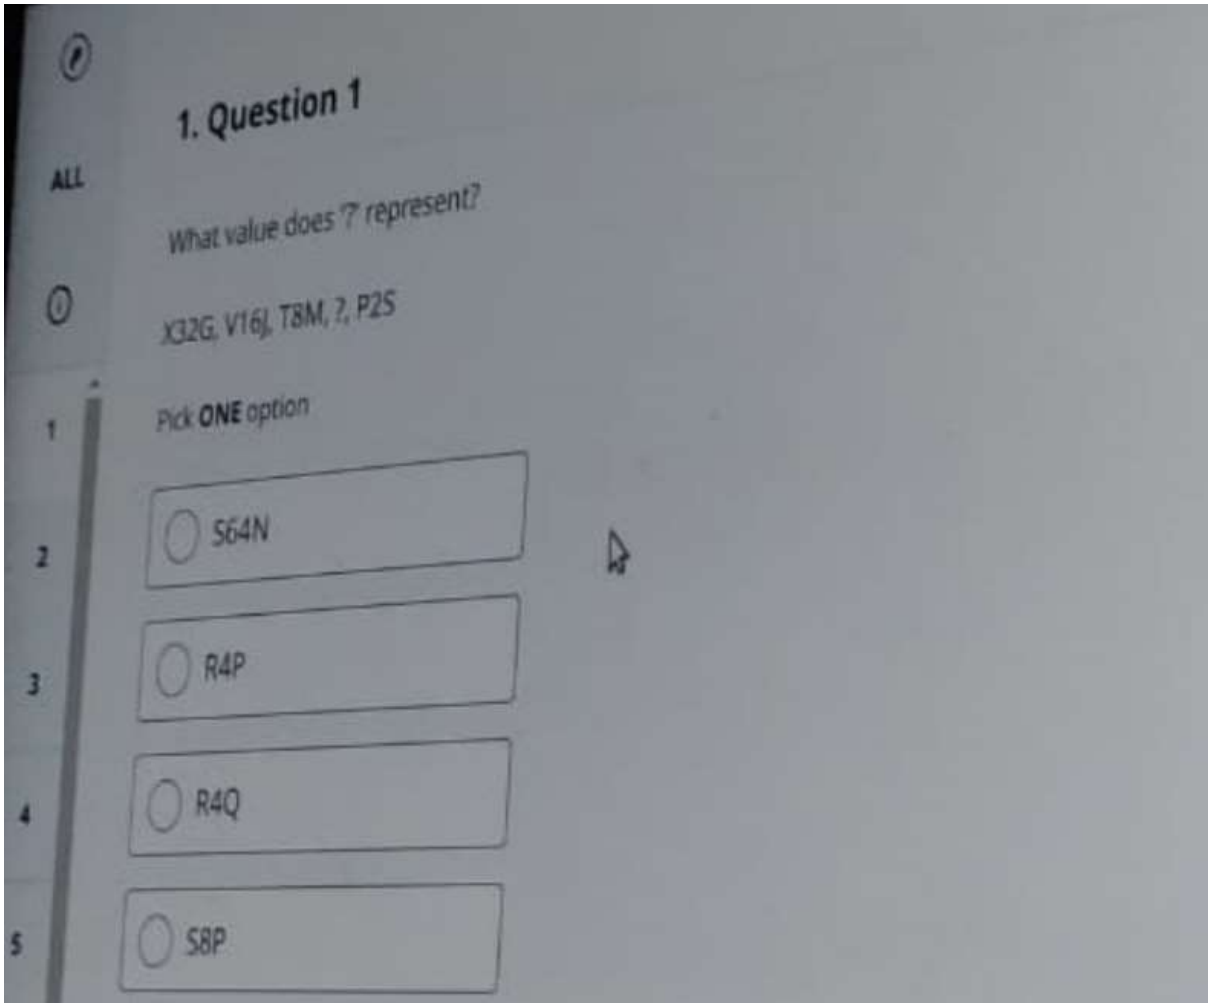
1. Question 1
ALL
What value does '?' represent?
X32G, V16J, T8M, ?, P2S
Pick ONE option
1
2
S64N
3
R4P
4
R4Q
5
S8P


Answer: b) R4P

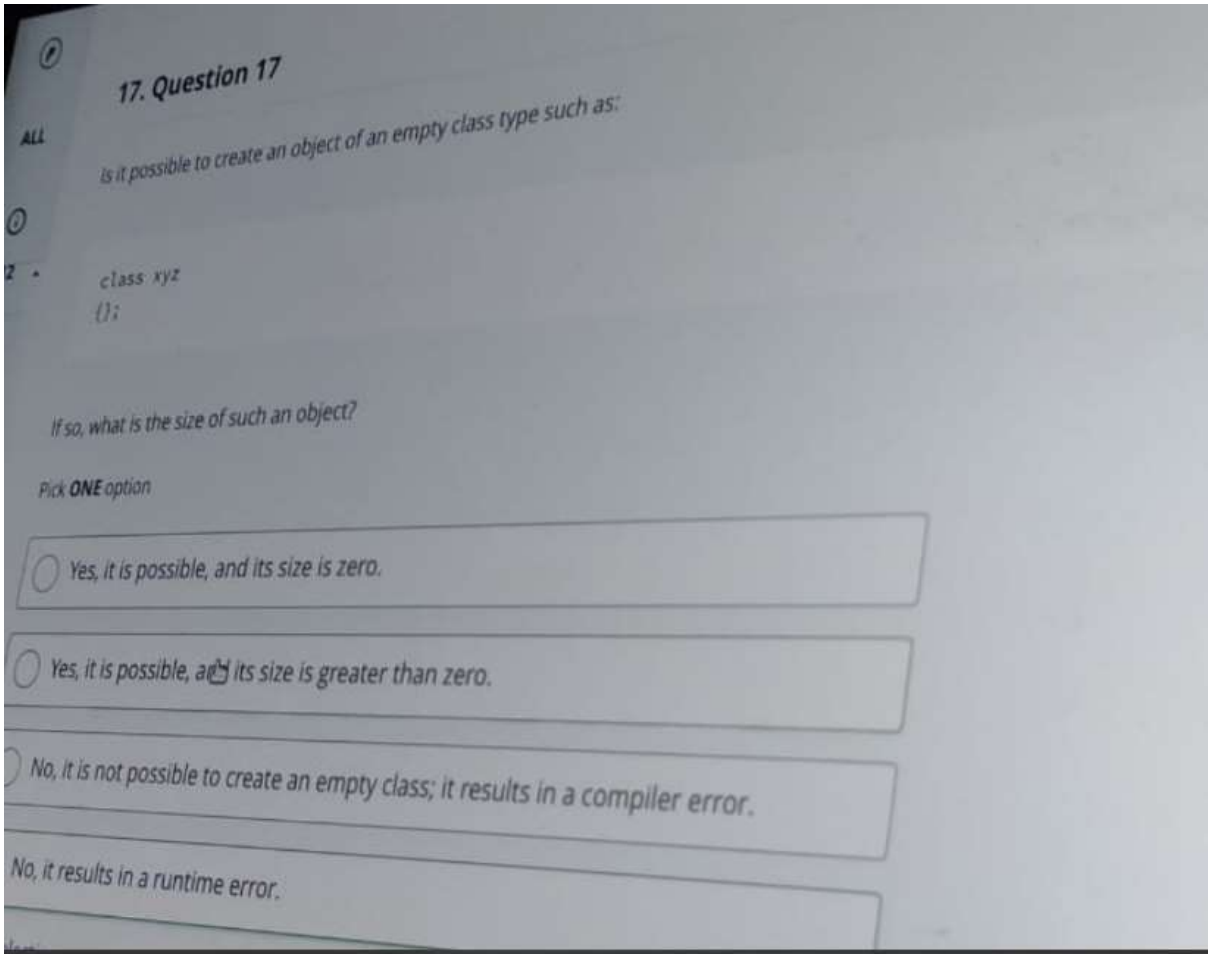


Answer: b) Yes it is possible, and size is greater than zero

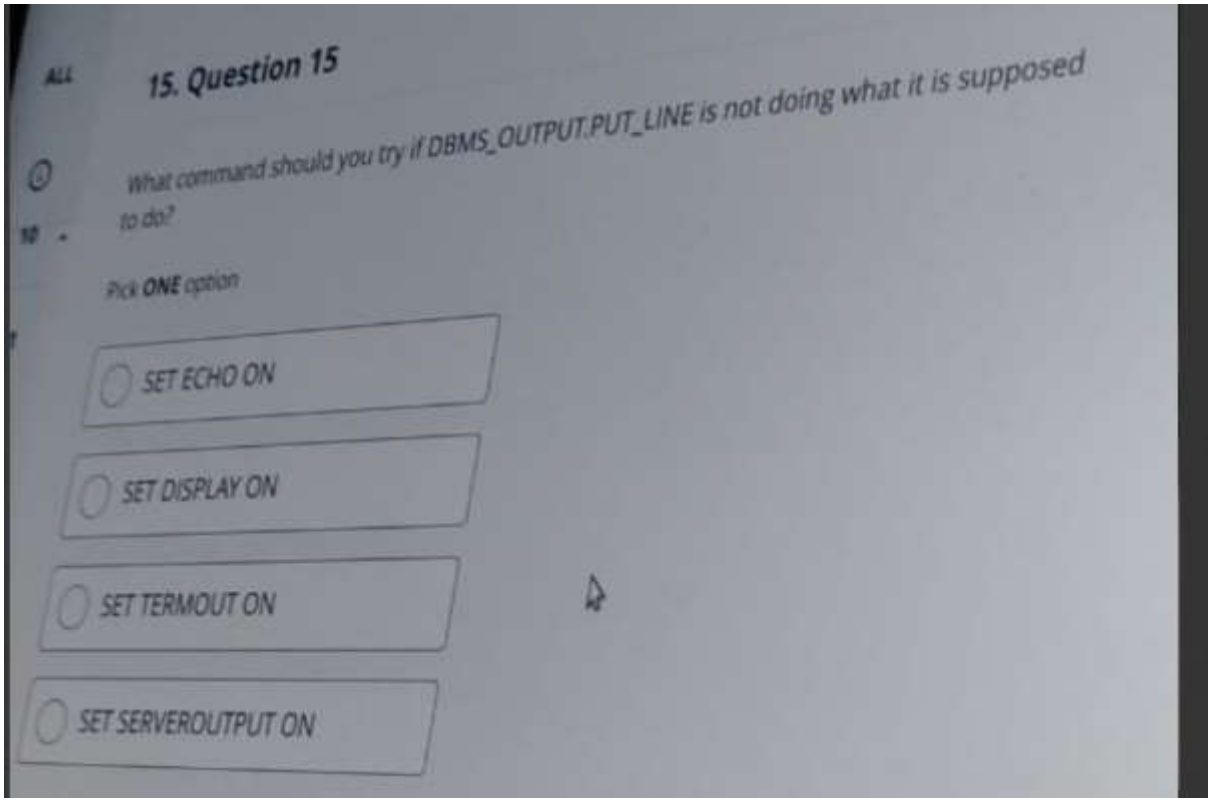


Answer: d) SET SERVEROUTPUT ON

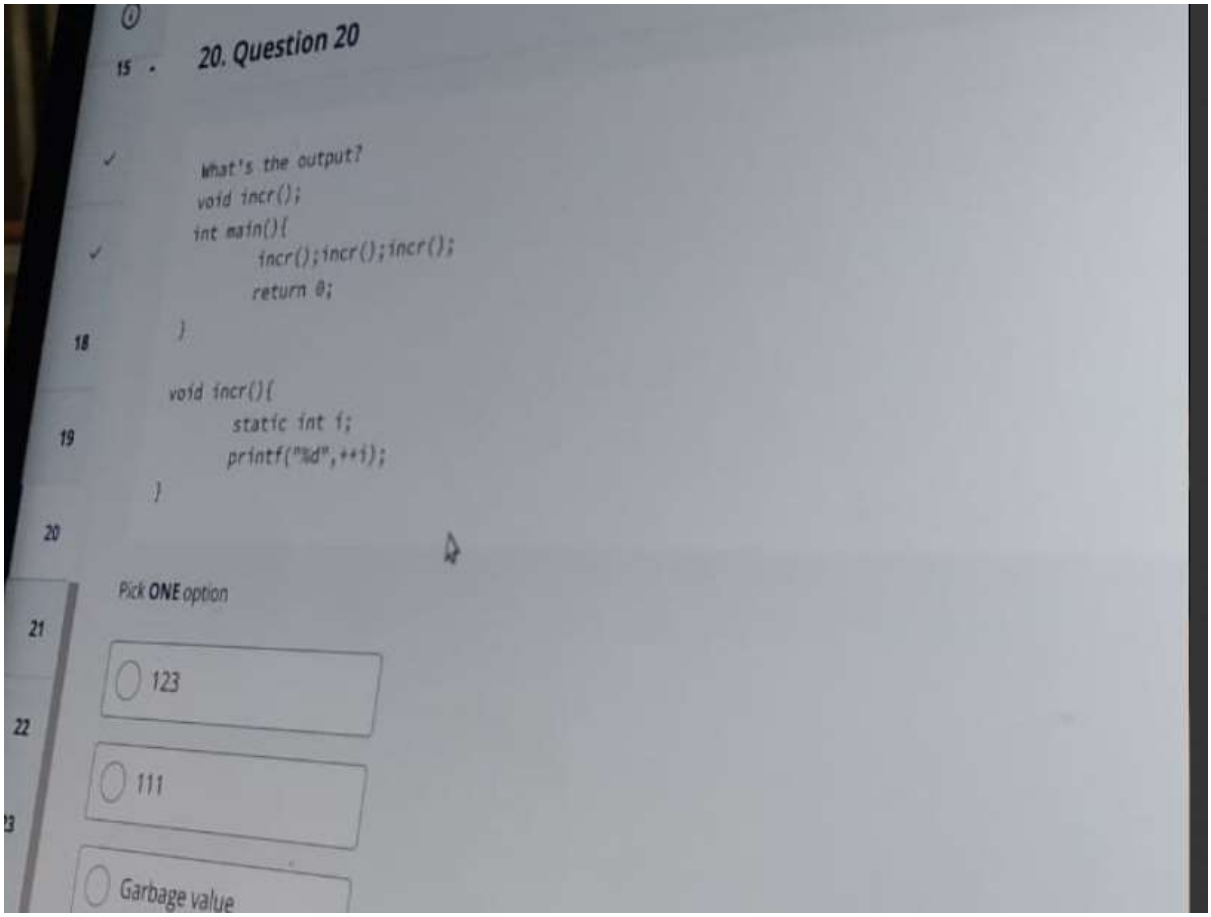
20. Question 20
What's the output?
void incr();
int main(){
incr();incr();incr();
return 0;
}
void incr(){
static int i;
printf("%d",++i);
}
Pick ONE option
123
111
Garbage value


Answer: a) 123

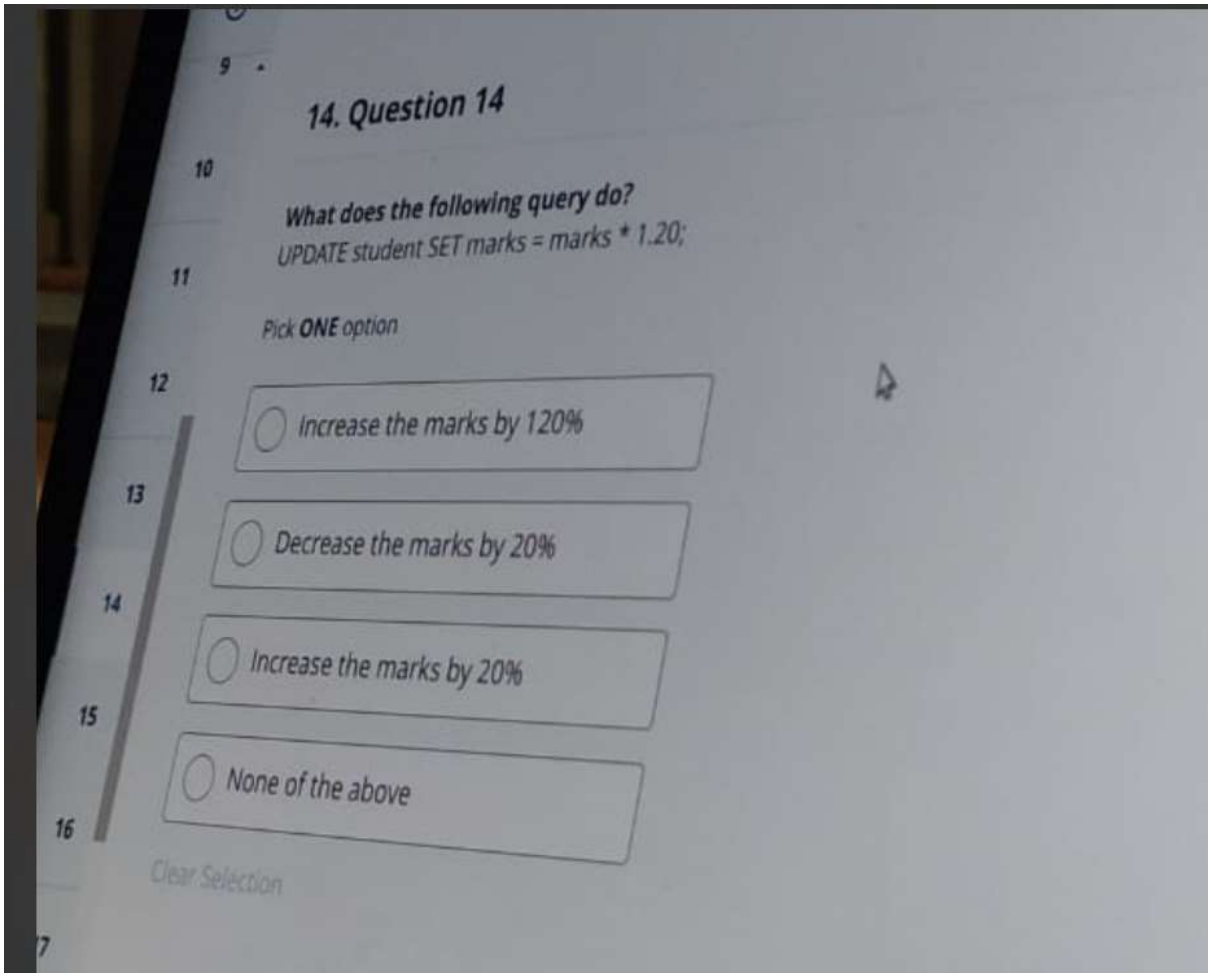

Answer: c) Increase the marks by 20%

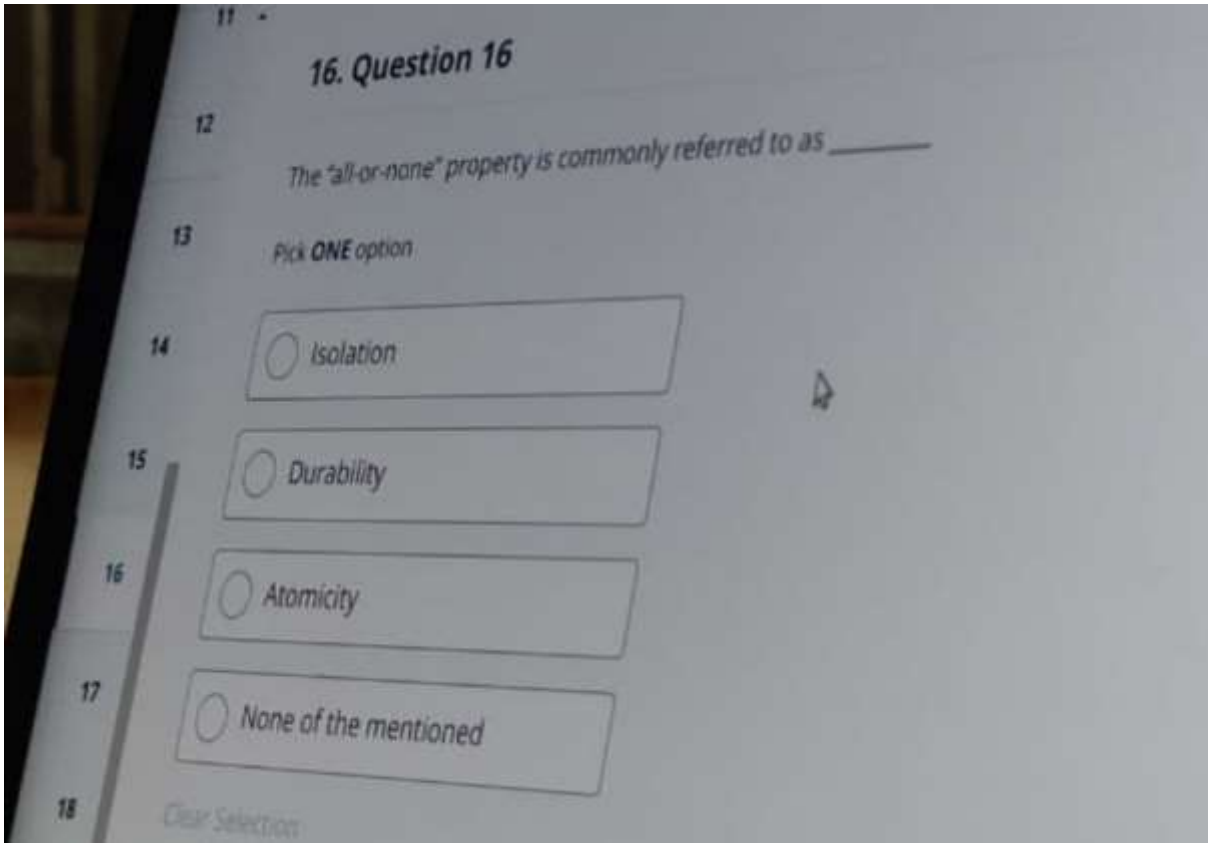

Answer: c) Atomicity

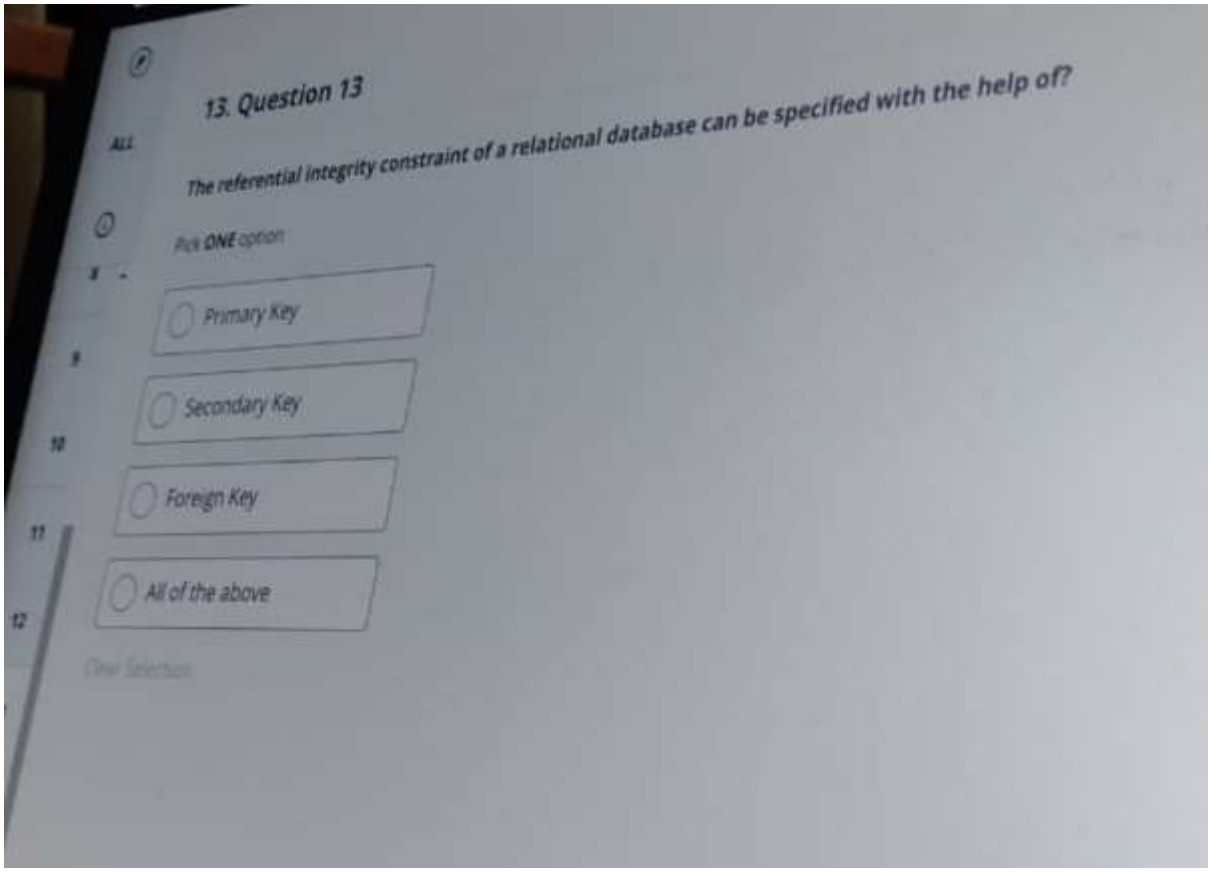

Answer: c) Foreign Key