

Day - 79

Step - 1: Create 2 Sub-net and 2 VM in you Resource

Microsoft Azure

Search resources, services, and docs (G+)

Copilot

Home > Resource Manager | Resource groups

Create a resource group

Basics Tags Review + create

Resource group - A container that holds related resources for an Azure solution. The resource group can include all the resources for the solution, or only those resources that you want to manage as a group. You decide how you want to allocate resources to resource groups based on what makes the most sense for your organization. [Learn more](#)

Subscription *


Azure subscription 1


Resource group name *

rg-appgw-la

Region *

(US) East US

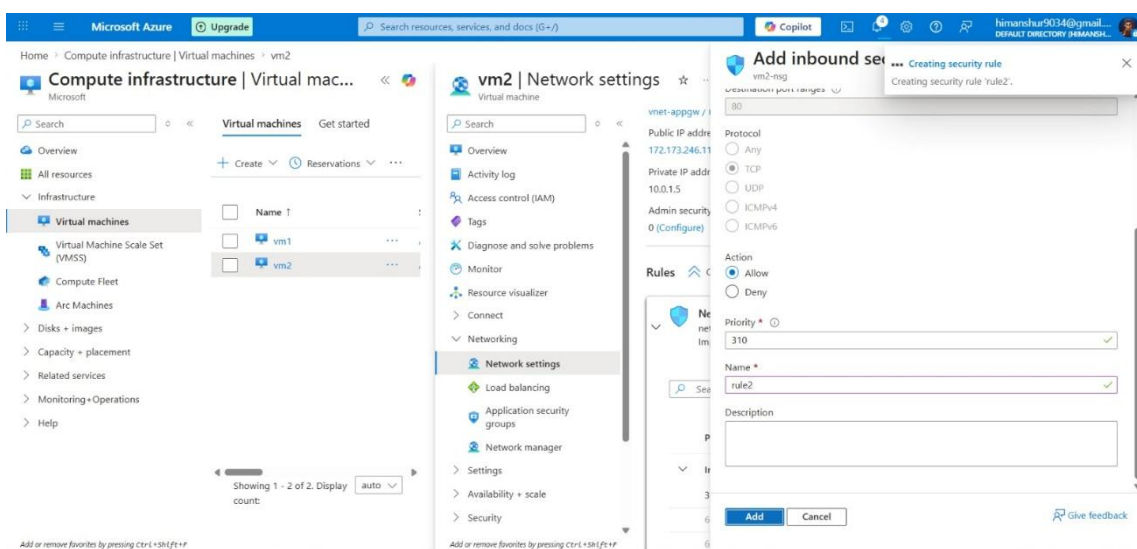

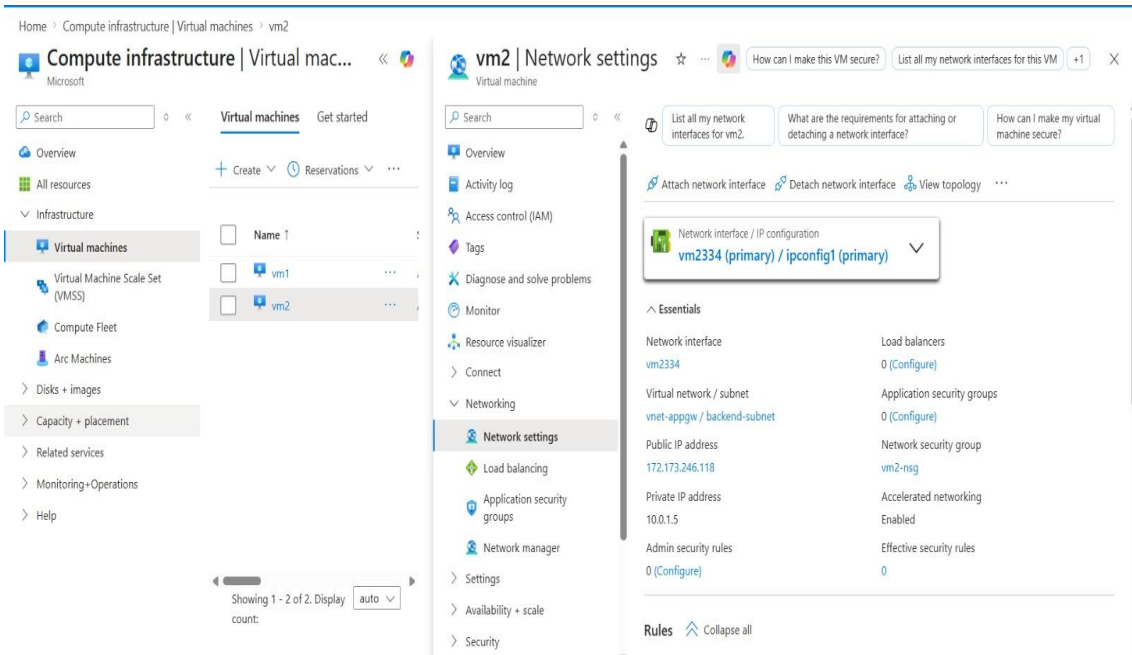

Edit subnet

Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. [Learn more](#)

Subnet ID `/subscriptions/d370e960-de75-4930-83e1-49a0dbed96d3/resourceGroups/rg-appgw-lab/...`

Subnet purpose ☐ Default

Name *

IPv4

Include an IPv4 address space ☒ Address prefix '10.0.0.0/24' cannot be updated because the subnet is in use.

IPv4 address space *

Starting address *

Size

Subnet address range

IPv6

Include an IPv6 address space ☐ This virtual network has no IPv6 address ranges.

Private subnet

Private subnets enhance security by not providing default outbound access. To enable outbound connectivity for virtual machines to access the internet, it is necessary to explicitly grant outbound access. A NAT gateway is the recommended way to provide outbound connectivity.

Edit subnet



Select an address space and configure your subnet. You can customize a default subnet or select from subnet templates if you plan to add select services later. [Learn more](#)

Subnet ID /subscriptions/d370e960-de75-4930-83e1-49a0dbed96d3/resourceGroups/rg-appgw-lab/...

Subnet purpose Default

Name * backend-subnet

IPv4

Include an IPv4 address space ☒ Address prefix '10.0.1.0/24' cannot be updated because the subnet is in use.

IPv4 address space * 10.0.0.0/16

Starting address * 10.0.1.0

Size /24

Subnet address range 10.0.1.0 - 10.0.1.255

IPv6

Include an IPv6 address space ☐ This virtual network has no IPv6 address ranges.

Private subnet

Private subnets enhance security by not providing default outbound access. To enable outbound connectivity for virtual machines to access the internet, it is necessary to explicitly grant outbound access. A NAT gateway is the recommended way to provide outbound connectivity

[+ Create](#) [Manage view](#) [Refresh](#) [Export to CSV](#) [Group by none](#)

[Filter for any field...](#)

Subscription equals all

Resource Group equals all

Location equals all



[+ Add filter](#)

☐	Name ↑	Resource Group	Location	Subscription
☐	vnet-appgw	rg-appgw-lab	East US	Azure subscrip...

Showing 1 - 1 of 1. Display count: auto

[Give feedback](#)

Step - 2: Connect Your VM using SSH

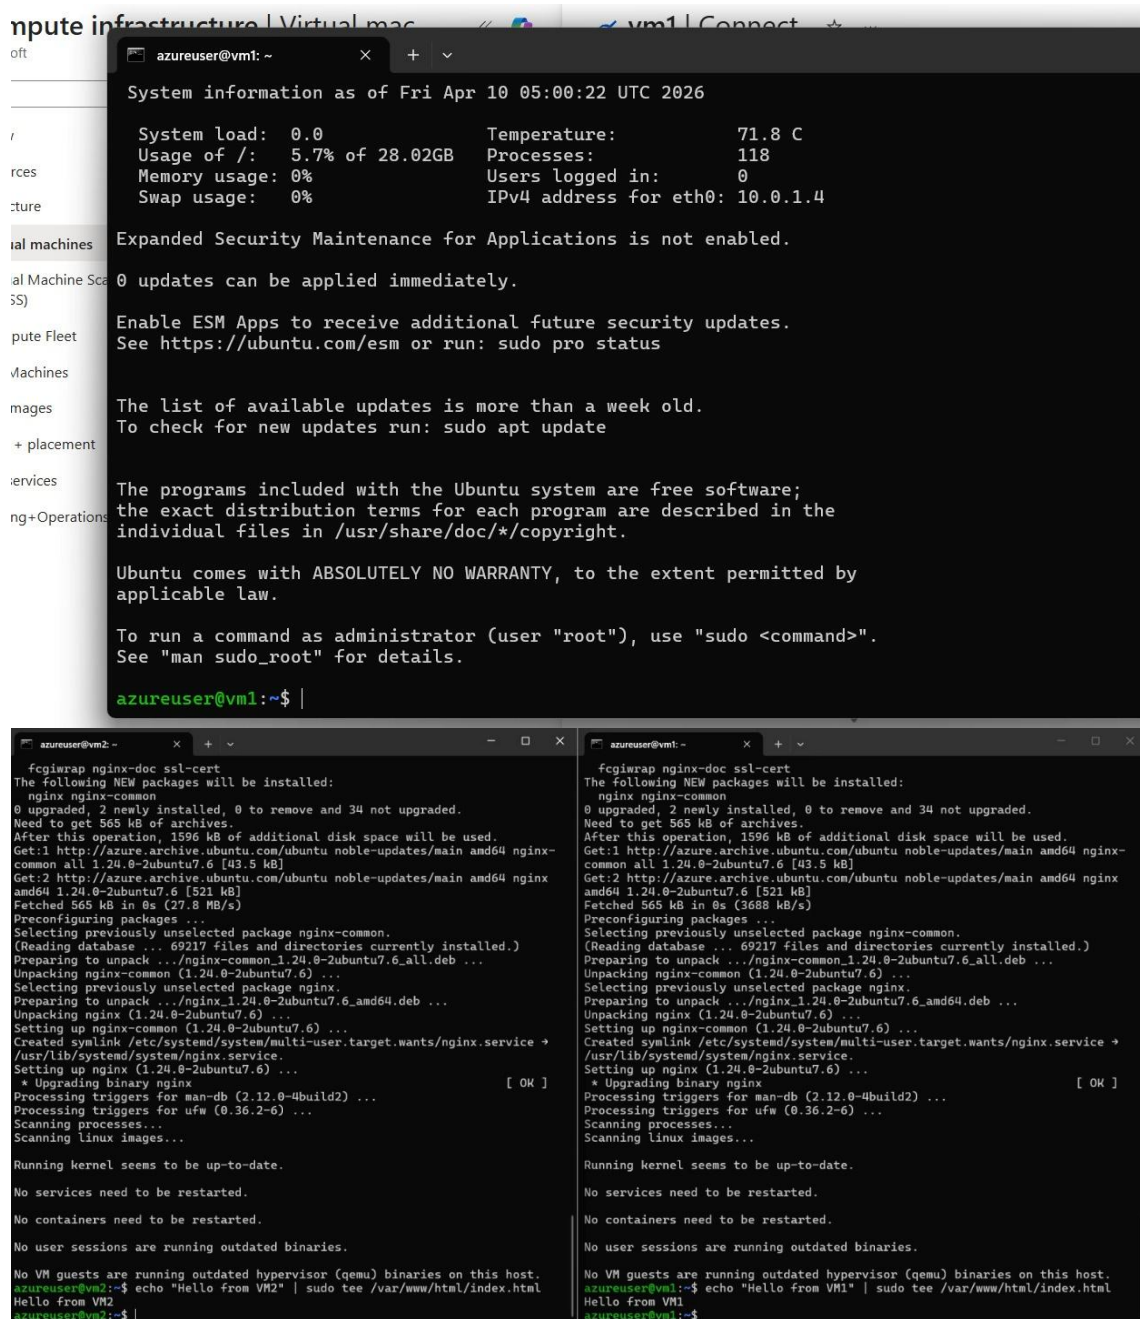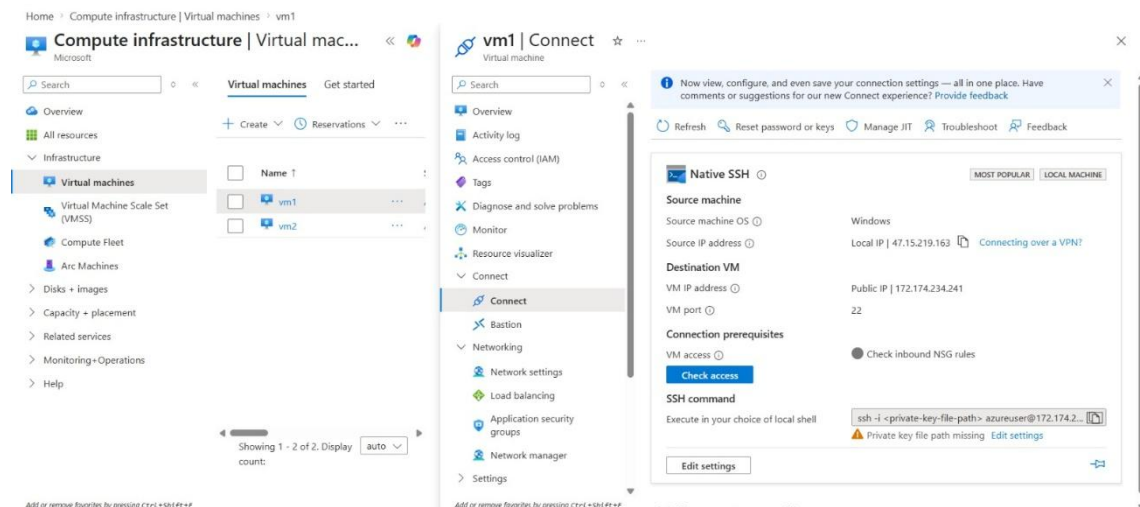

Step - 3: Create Application Gateway

Create application gateway ...

✓ Validation passed

Subscription	Standard_v2
Enable autoscaling	Enabled
Minimum instance count	1
Maximum instance count	5
Availability zone	Zones 1, 2, 3
HTTP2	Enabled
FIPS (Federal Information Processing Standard) mode 140-2	Disabled
Virtual network	vnet-appgw
Subnet	appgw-subnet (10.0.0.0/24)

Frontends

Public IPv4 address name	appgw-pip
SKU	Standard
Assignment	Static
Availability zone	ZoneRedundant

Tags

None

Home > Load balancing and content delivery | Application gateways

Create application gateway ...

✓ Validation passed

✓ Basics ✓ Frontends ✓ Backends ✓ Configuration ✓ Tags **6 Review + create**

Basics

Subscription	Azure subscription 1
Resource group	rg-appgw-lab
Name	appgw-demo
Region	East US
Tier	Standard_v2
Enable autoscaling	Enabled
Minimum instance count	1
Maximum instance count	5
Availability zone	Zones 1, 2, 3
HTTP2	Enabled
FIPS (Federal Information Processing Standard) mode 140-2	Disabled
Virtual network	vnet-appgw
Subnet	appgw-subnet (10.0.0.0/24)

Home > Load balancing and content delivery | Azure Front Door

Create a Front Door profile ...

Microsoft Azure

AFD configuration updates take up to 20 minutes to take effect. Back to Back changes may take up to 40 minutes. More details in [Azure Front Door Frequently Asked Questions \(FAQ\)](#).

* Basics Tags Review + create

Azure Front Door is a modern application delivery network platform providing a secure, scalable CDN, dynamic site acceleration, and global HTTP(s) load balancing for your global web applications. [Learn more](#)

Project details
Select the subscription to manage deployed resources and costs. Use resource groups like folders to organize and manage all your resources.

Subscription *

Azure subscription 1

Resource group *

rg-appgw-lab

Create new

Resource group location

East US

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

✓ Basics ✓ Frontends ✓ **Backends** ✓ Configuration ✓ Tags ⑥ Review + create

A backend pool is a collection of resources to which your application gateway can send traffic. A backend pool can contain virtual machines, virtual machine scale sets, app services, IP addresses, or fully qualified domain names (FQDN).

[Add a backend pool](#)

Backend pool	Targets
backend-pool	Home > Load balancing and content delivery Application gateways Create application gateway ...

Create application gateway ...

Changes you make on this tab may affect any configuration you've done on other tabs. Review all options prior to creating the application gateway.

✓ Basics ✓ **Frontends** ✓ Backends ✓ Configuration ✓ Tags ⑥ Review + create

Traffic enters the application gateway via its frontend IP address(es). An application gateway can use a public IP address, private IP address, or one of each type.

Frontend IP address type

☒ Public ☐ Private ☐ Both

Public IPv4 address *

(New) appgw-pip

Add new

Create application gateway



✓ Basics ✓ Frontends ✓ Backends ✓ **Configuration** ✓ Tags ⑥ Review + create

Create routing rules that link your frontend(s) and backend(s). You can also add more backend pools, add a second frontend IP configuration if you haven't already, or edit previous configurations. [↗](#)



Frontends

+ Add a frontend IP



Routing rules

+ Add a routing rule



Backend pools

+ Add a backend pool

Public: (new) appgw-pip



rule1



backend-pool



[Manage Backend settings](#)

Step - 4: You can Access the data in HTML using same Public IP

← → ↻  Not secure 172.174.234.241

Hello from VM1

← → ↻  Not secure 172.173.246.118

Hello from VM2