ASSIGNMENT-1

1. Creating and Renaming Files/Directories

- Create a directory named test_dir using mkdir.
- Inside test_dir, create an empty file called example.txt.
- Rename example.txt to renamed_example.txt using mv

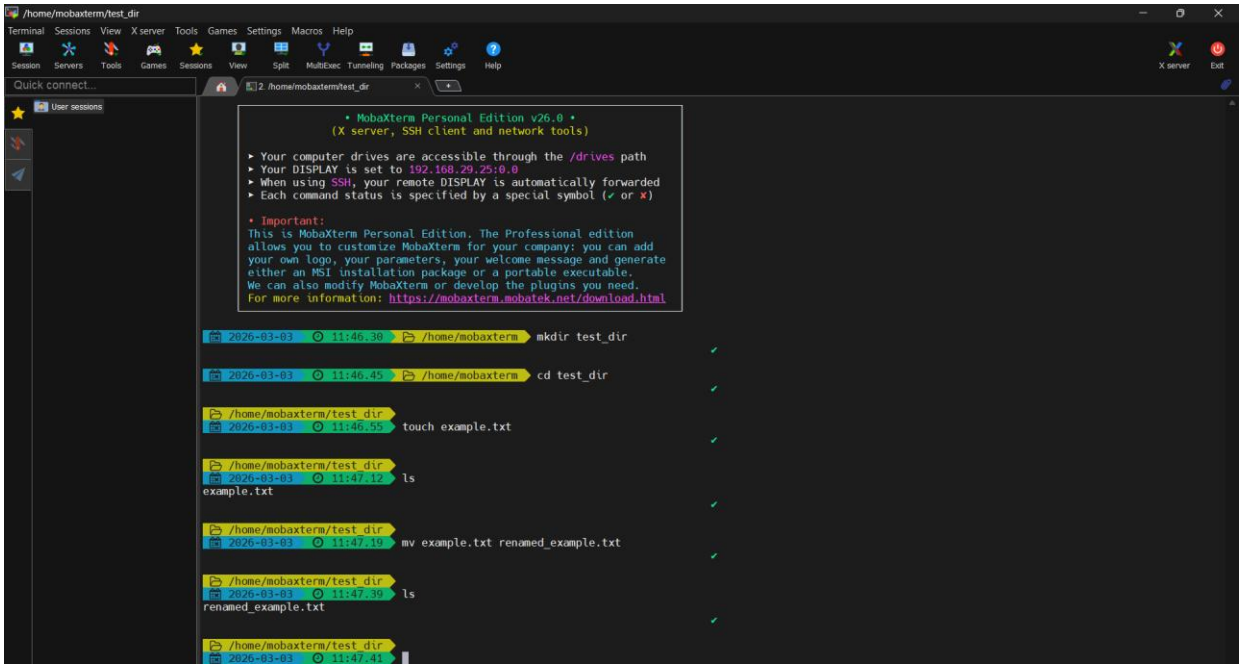

2. Viewing File Contents

- Use cat to display the contents of /etc/passwd.
- Display only the first 5 lines of /etc/passwd using head.
- Display only the last 5 lines of /etc/passwd using tail.

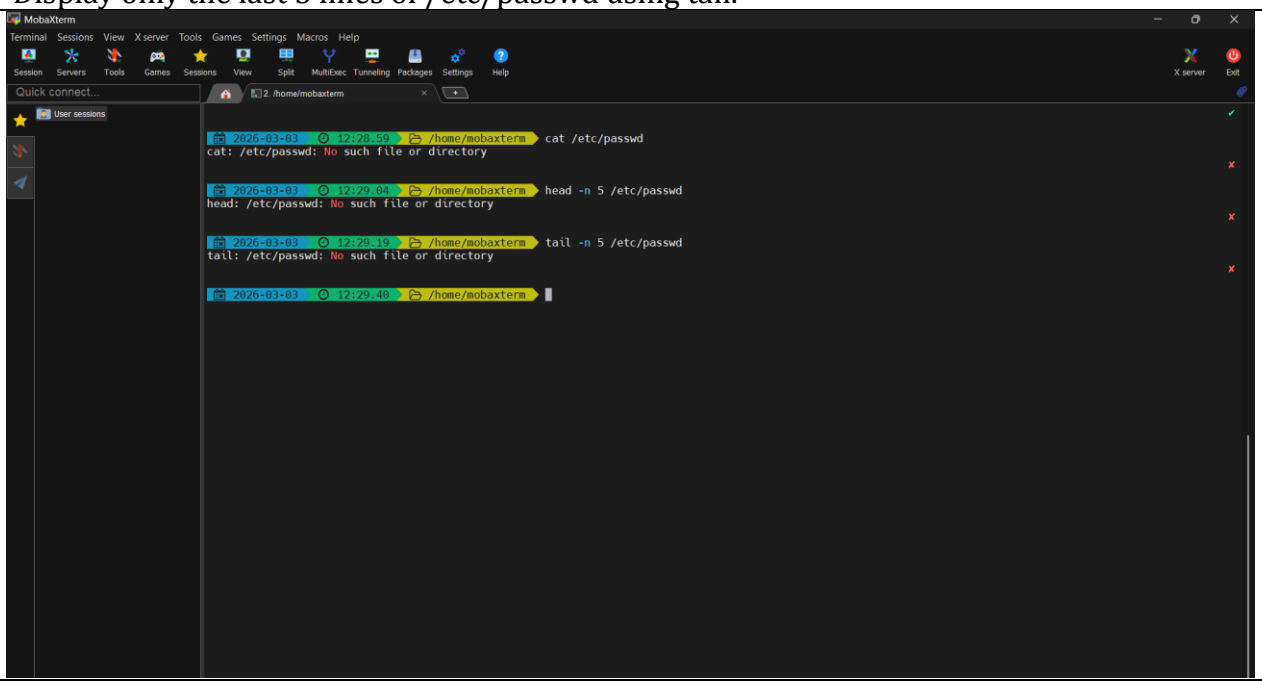

3.Searching for Patterns

- Use grep to find all lines containing the word "root" in /etc/passwd.

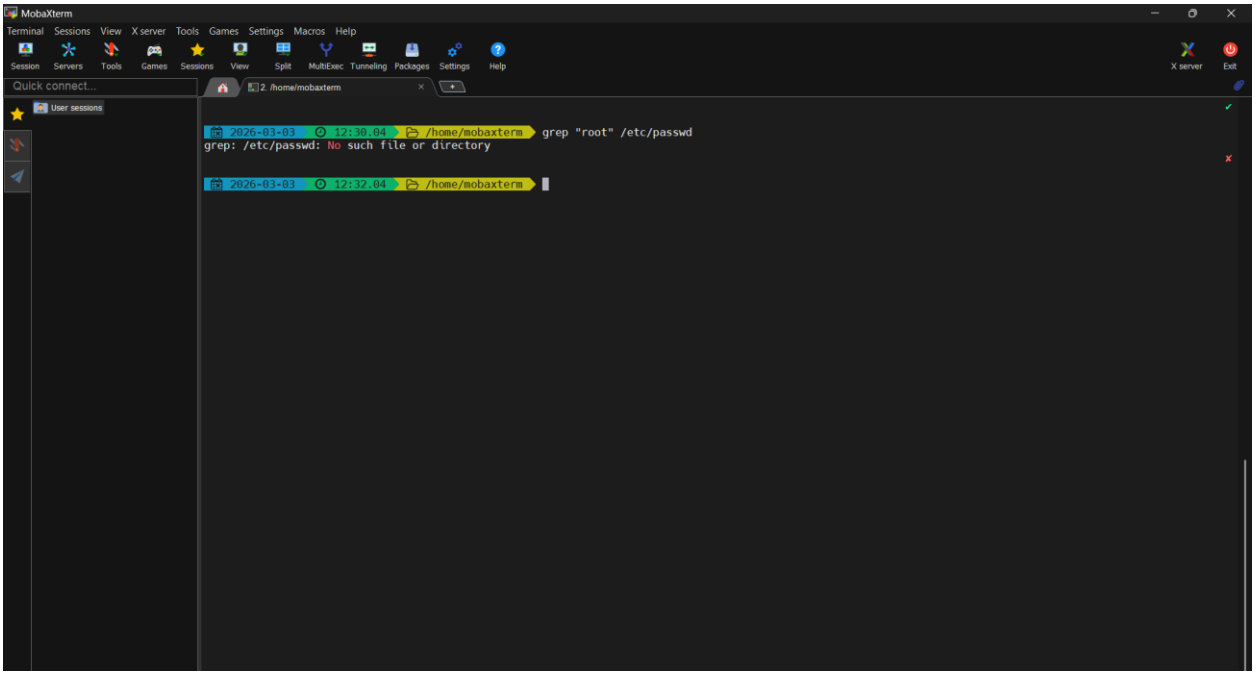

4. Zipping and Unzipping

- Compress the test_dir directory into a file named test_dir.zip using zip.
- Unzip test_dir.zip into a new directory named unzipped_dir.

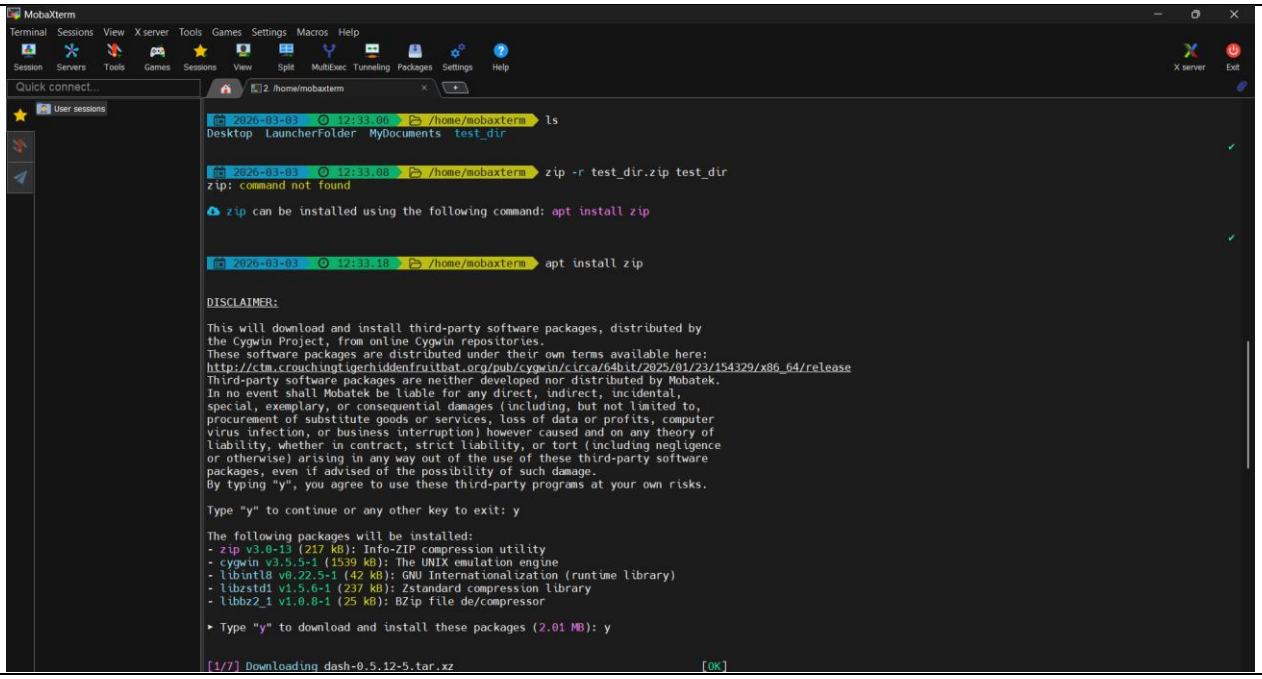

```
[1/7] Downloading dash-0.5.12-5.tar.xz                                  [OK]
[1/7] Installing dash-0.5.12-5.tar.xz                                   [OK]
[2/7] Downloading rebase-4.6.6-1.tar.xz                                 [OK]
[2/7] Installing rebase-4.6.6-1.tar.xz                                  [OK]
[3/7] Downloading libbz2_1-1.0.8-1.tar.xz                               [OK]
[3/7] Installing libbz2_1-1.0.8-1.tar.xz                                [OK]
[4/7] Downloading libzstd1-1.5.6-1.tar.zst                              [OK]
[4/7] Installing libzstd1-1.5.6-1.tar.zst                               [OK]
[5/7] Downloading libintl8-0.22.5-1.tar.xz                              [OK]
[5/7] Installing libintl8-0.22.5-1.tar.xz                               [OK]
[6/7] Downloading cygwin-3.5.5-1.tar.xz                                 [OK]
[6/7] Installing cygwin-3.5.5-1.tar.xz                                  [OK]
[7/7] Downloading zip-3.0-13.tar.xz                                     [OK]
[7/7] Installing zip-3.0-13.tar.xz                                      [OK]
- Replacing old symlinks                                                [OK]
- Rebasing files                                                        [OK]
- Executing postinstall scripts                                         [OK]

2026-03-03 12:45.25 /home/mobaxterm ls
Desktop  LauncherFolder  MyDocuments  test_dir

2026-03-03 12:45.44 /home/mobaxterm zip -r test_dir.zip test_dir
  adding: test_dir/ (stored 0%)
  adding: test_dir/renamed_example.txt (stored 0%)

2026-03-03 12:45.49 /home/mobaxterm ls
Desktop  LauncherFolder  MyDocuments  test_dir  test_dir.zip

2026-03-03 12:45.55 /home/mobaxterm mkdir unzipped_dir

2026-03-03 12:46.17 /home/mobaxterm ls
Desktop  LauncherFolder  MyDocuments  test_dir  test_dir.zip  unzipped_dir

2026-03-03 12:46.19 /home/mobaxterm unzip test_dir.zip -d unzipped_dir
unzip: command not found
```

```
2026-03-03 12:45.55 /home/mobaxterm mkdir unzipped_dir

2026-03-03 12:46.17 /home/mobaxterm ls
Desktop  LauncherFolder  MyDocuments  test_dir  test_dir.zip  unzipped_dir

2026-03-03 12:46.19 /home/mobaxterm unzip test_dir.zip -d unzipped_dir
unzip: command not found

unzip can be installed using the following command: apt install unzip

2026-03-03 12:46.34 /home/mobaxterm apt install unzip

The following package will be installed:
- unzip v6.0-18 (188 kB): Info-ZIP decompression utility

▸ Type "y" to download and install this package (0.18 MB): y

[1/1] Downloading unzip-6.0-18.tar.xz                                   [OK]
[1/1] Installing unzip-6.0-18.tar.xz                                    [OK]
- Replacing old symlinks                                                [OK]
- Executing postinstall scripts                                         [OK]

2026-03-03 12:47.14 /home/mobaxterm ls
Desktop  LauncherFolder  MyDocuments  test_dir  test_dir.zip  unzipped_dir

2026-03-03 12:47.22 /home/mobaxterm unzip test_dir.zip -d unzipped_dir
Archive:  test_dir.zip
   creating: unzipped_dir/test_dir/
 extracting: unzipped_dir/test_dir/renamed_example.txt

2026-03-03 12:47.26 /home/mobaxterm ls
Desktop  LauncherFolder  MyDocuments  test_dir  test_dir.zip  unzipped_dir
```

5. Downloading Files

- Use wget to download a file from a URL (e.g., https://example.com/sample.txt).

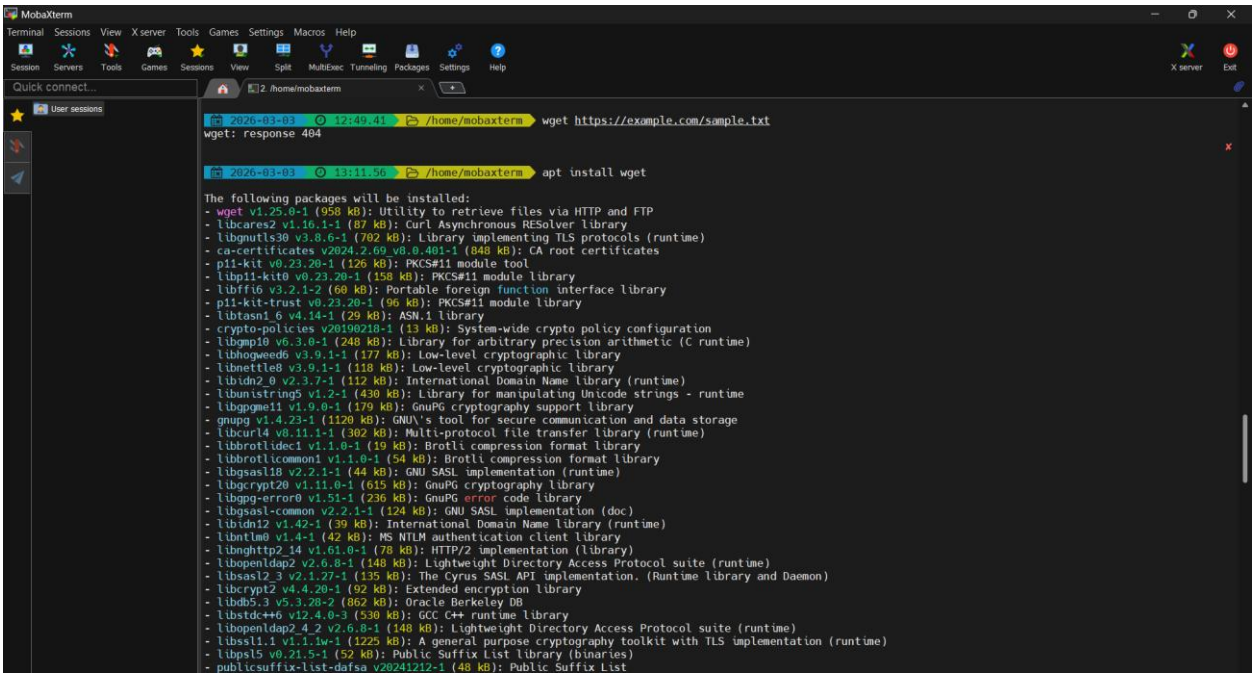

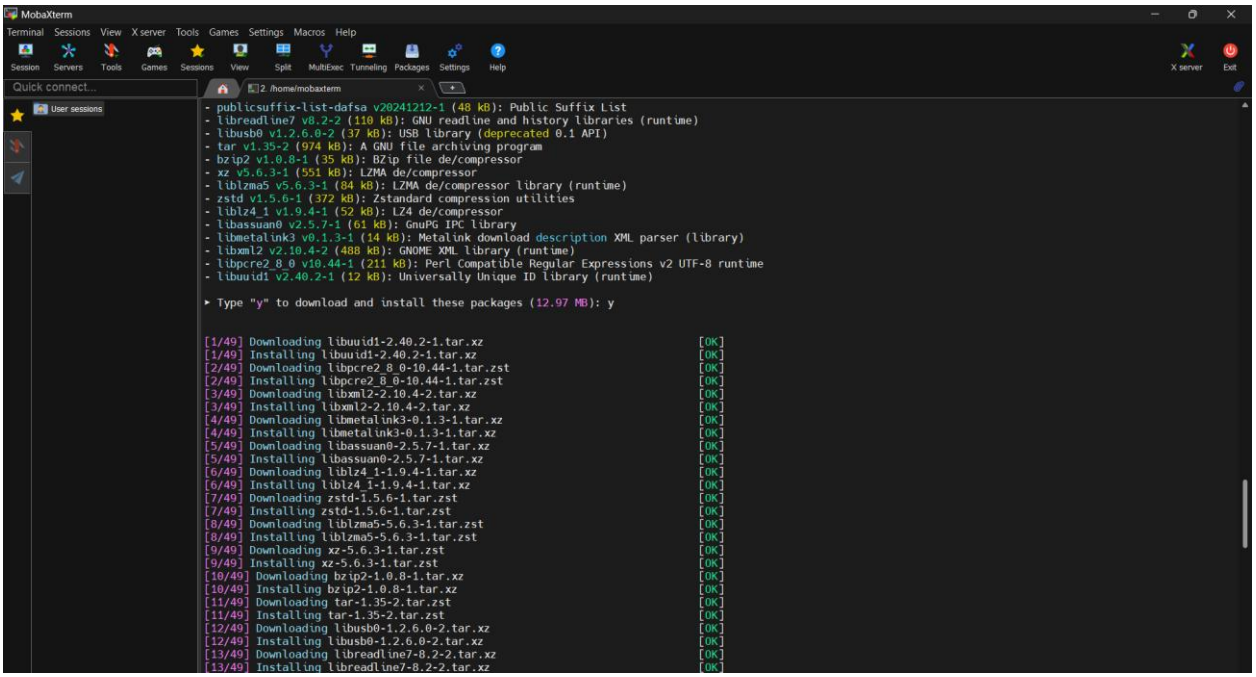

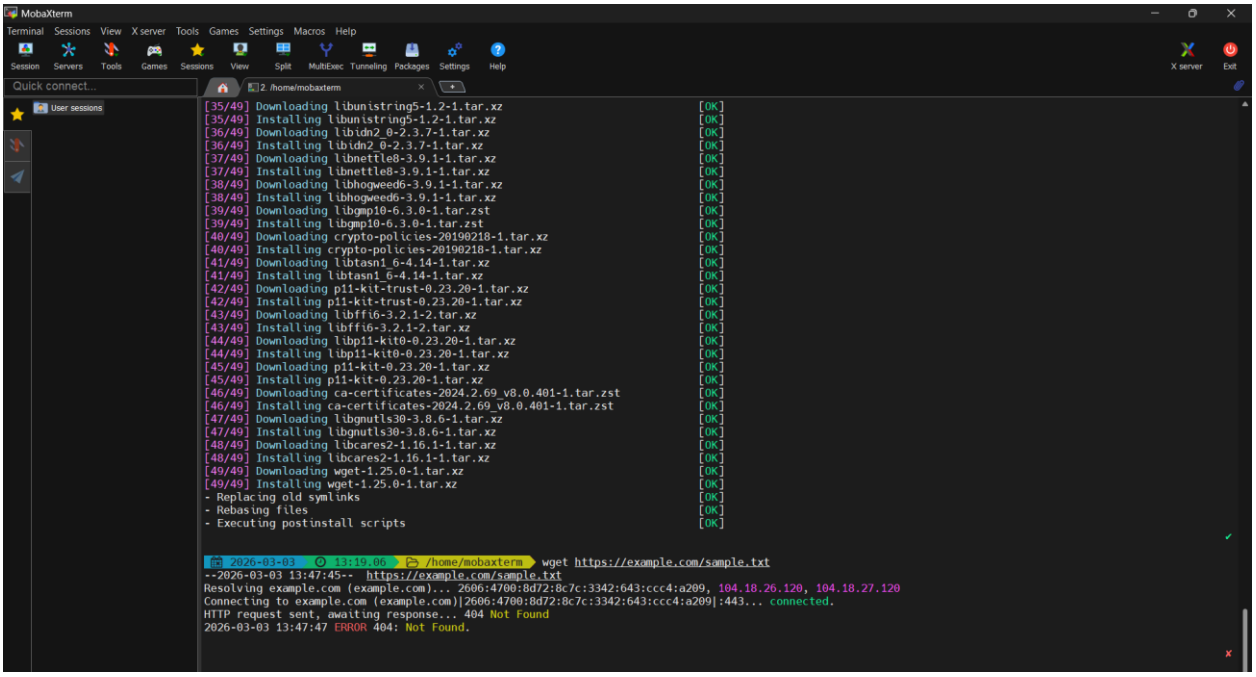

6. Changing Permissions

- Create a file named secure.txt and change its permissions to read-only for everyone using chmod.

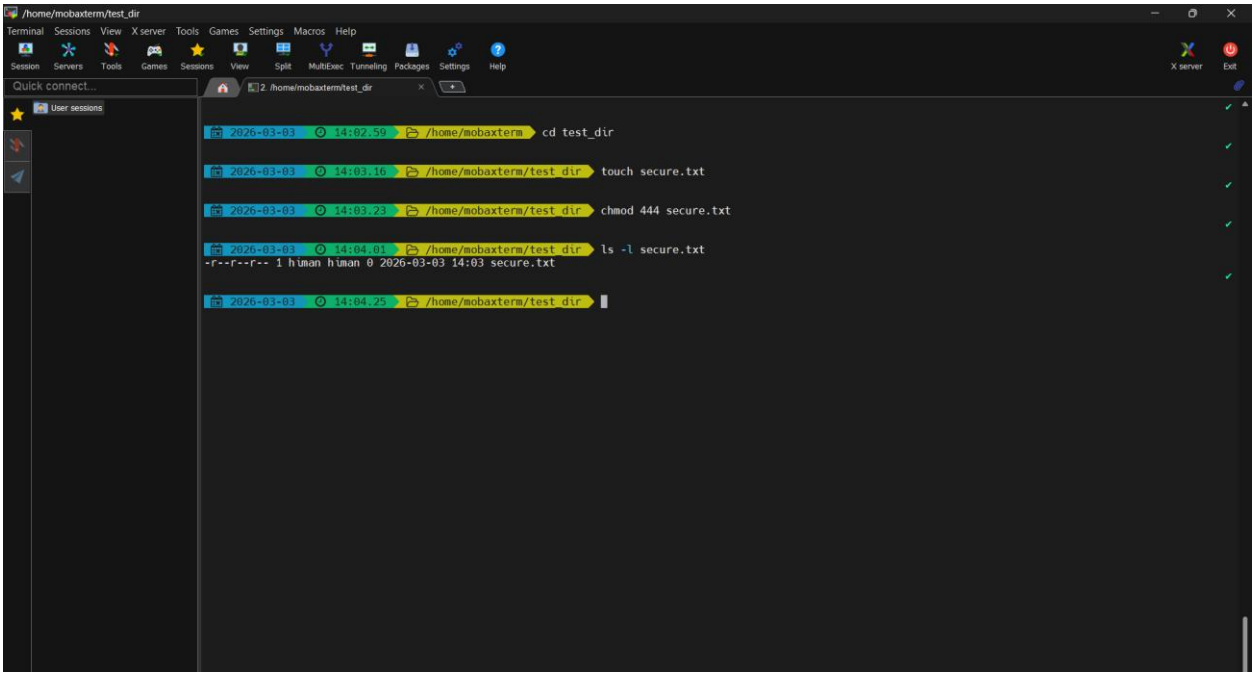

7. Working with Environment Variables
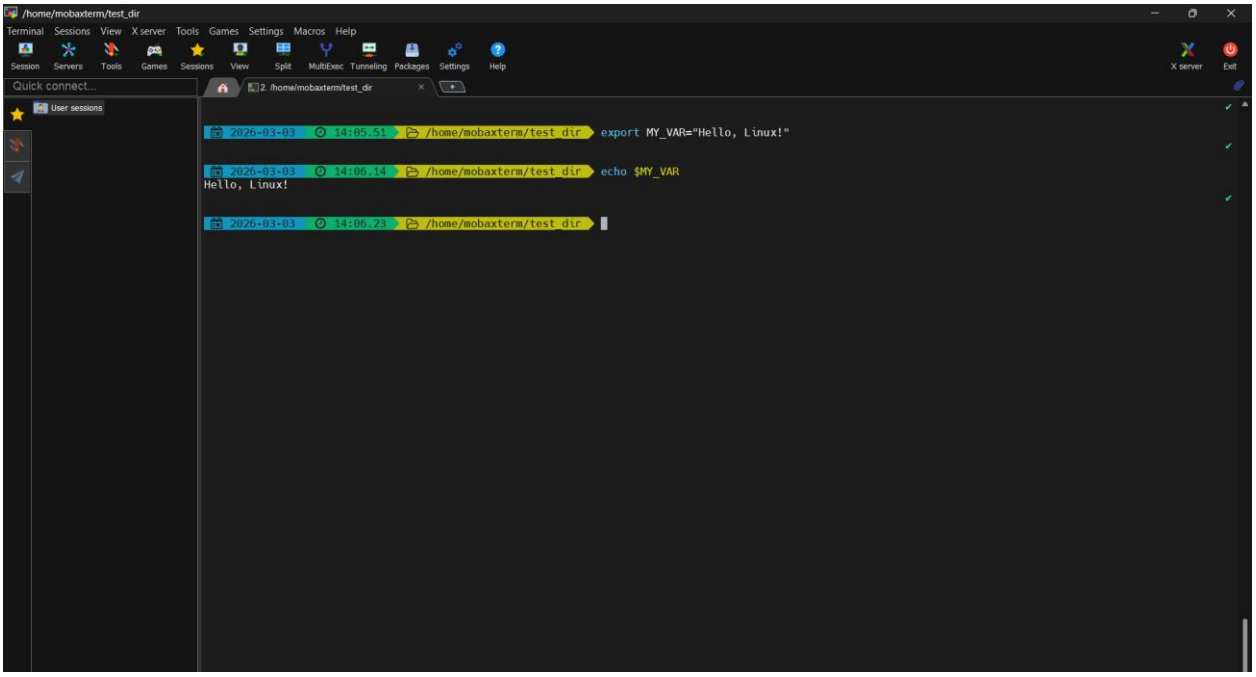
- Use export to set a new environment variable called MY_VAR with the value "Hello, Linux!".