

Recommender System and Trend Analysis for arXiv Research Papers

Team Members:

HIMASAGAR U
S20220010229

DEERAJ AKKI
S20220010008

KRISHNA VARDHAN V
S20220010231

VASHAN ANAND
S20220010235

Team Member Contributions

- **HIMASAGAR U** (S20220010229)
Developed the Paper-Based and Query-Based recommender system, implemented TF-ICF methods, and implemented core algorithms.
- **DEERAJ AKKI** (S20220010008)
Handled Trend analysis and created key visualizations.
- **KRISHNA VARDHAN V** (S20220010231)
Refined the trend analysis, created few additional visualizations and helped with report writing.
- **VASHAN ANAND** (S20220010235)
Managed Data Preprocessing, Report writing, and helped with recommendation similarity metrics.

Submission Date: March 30, 2025

Contents

1	Abstract	2
2	Introduction	2
3	Theoretical Background	2
3.1	Content-Based Filtering	3
3.2	Term Frequency-Inverse Category Frequency (TF-ICF)	3
3.3	Cosine Similarity	3
3.4	Trend Analysis	4
4	Dataset Description	4
4.1	Preprocessing Steps	4
5	Methodology	4
5.1	Recommender System	5
5.2	Trend Analysis	5
6	Implementation	6
6.1	Code Explanation	7
7	Experiments and Results	8
7.1	Recommender System Results	8
7.1.1	Paper-Based Recommendations (Index 0)	8
7.1.2	Query-Based Recommendations	9
7.2	Trend Analysis Results	10
8	Conclusion	19

1 Abstract

This project develops a recommender system for arXiv papers and analyzes research trends over time, addressing the question: ***How can we recommend relevant arXiv papers to researchers based on their interests (using title, summary, authors, and category) and identify emerging trends in research topics over time to highlight areas of growing interest?*** We implemented a content-based recommender system using Term Frequency-Inverse Category Frequency (TF-ICF) and cosine similarity to recommend papers based on textual and categorical features. Additionally, we conducted a comprehensive trend analysis producing eight insightful visualizations. Our recommender system effectively suggests relevant papers (demonstrated by 0.98 average similarity for top recommendations), while the trend analysis reveals significant growth in categories like Machine Learning (400% increase since 2000) and increasing collaboration (average authors per paper growing from 2 to 4 since 1995).

2 Introduction

The arXiv repository, hosting over 2 million scientific papers, presents challenges in discovering relevant research. This project addresses:

- **Recommendation:** Personalized paper suggestions using title, summary, authors, and category.
- **Trend Analysis:** Identifying emerging research areas through publication patterns.

We analyze the arXiv dataset containing:

- 136,238 papers with complete metadata.
 - 17,138 unique categories.
 - Temporal coverage: 1993–2024.
-

3 Theoretical Background

This section provides the theoretical foundation for our methodology, focusing on the key concepts used in the recommender system and trend analysis.

3.1 Content-Based Filtering

Content-based filtering recommends items by comparing the content of items with user preferences. In this project, we use paper features (title, summary, category, authors) to recommend arXiv papers that align with a researcher’s interests. This method leverages item metadata to compute similarities, making it suitable for recommending papers without requiring user interaction data.

3.2 Term Frequency-Inverse Category Frequency (TF-ICF)

TF-ICF is an adaptation of the Term Frequency-Inverse Document Frequency (TF-IDF) metric, tailored for category-based weighting. It emphasizes terms that are distinctive across categories, enhancing the relevance of recommendations in a multi-category dataset like arXiv. The components are defined as follows:

- **Term Frequency (TF):** The frequency of a term t in a document d , normalized by the total number of terms in d :

$$\text{TF}(t, d) = \frac{\text{number of times term } t \text{ appears in document } d}{\text{total number of terms in document } d}$$

- **Inverse Category Frequency (ICF):** Measures the rarity of a term across categories, where N is the total number of categories, and $\text{cf}(t)$ is the number of categories containing term t :

$$\text{ICF}(t) = \log \left(\frac{N}{\text{cf}(t)} \right)$$

- **TF-ICF:** Combines TF and ICF to weight terms:

$$\text{TF-ICF}(t, d) = \text{TF}(t, d) \times \text{ICF}(t)$$

By prioritizing terms rare across categories, TF-ICF ensures that category-specific terminology (e.g., “neural network” in Machine Learning) is given higher importance, improving recommendation accuracy.

3.3 Cosine Similarity

Cosine similarity measures the similarity between two vectors by computing the cosine of the angle between them, making it effective for high-dimensional sparse data like text features. For vectors \mathbf{a} and \mathbf{b} , it is defined as:

$$\text{Cosine Similarity} = \frac{\mathbf{a} \cdot \mathbf{b}}{\|\mathbf{a}\| \|\mathbf{b}\|}$$

where $\mathbf{a} \cdot \mathbf{b}$ is the dot product, and $\|\mathbf{a}\|$ and $\|\mathbf{b}\|$ are the Euclidean norms. In our system, cosine similarity quantifies the similarity between paper feature vectors, enabling the identification of relevant papers.

3.4 Trend Analysis

Trend analysis examines data points collected over time to identify trends, patterns, and seasonality. Using the `published_date` column, we analyze publication frequencies, category growth, author productivity, and collaboration patterns to uncover emerging research trends. Visualizations such as line plots, area plots, and heatmaps facilitate the interpretation of temporal dynamics.

4 Dataset Description

The dataset used is the arXiv scientific research papers dataset from Kaggle (“arXiv_scientific_dataset.csv”), containing the following columns:

- **title:** The title of the paper.
- **summary:** The abstract of the paper.
- **category:** The subject category (e.g., “Machine Learning”).
- **authors:** A list of author names (stored as a string representation of a list).
- **published_date:** The publication date of the paper.

4.1 Preprocessing Steps

To prepare the dataset for analysis, we performed the following preprocessing steps:

- Removed rows with missing `summary` or `published_date` values to ensure data integrity.
 - Cleaned `title` and `summary` by removing extra whitespace, newlines, and tabs, and combining them into a single `text` column for feature extraction.
 - Parsed the `authors` column from string representations to lists using `ast.literal_eval`.
 - Converted `published_date` to datetime format and extracted the `year` for trend analysis.
 - Exploded the `authors` column for author-based trend analysis, creating a row for each author-paper pair.
-

5 Methodology

Our solution consists of two main components: a recommender system for paper recommendations and a trend analysis to identify emerging research topics.

5.1 Recommender System

The recommender system uses a content-based filtering approach with TF-ICF and cosine similarity. The methodology is as follows:

1. Feature Extraction:

- *Text Features (Title and Summary):* Combined `title` and `summary` into a `text` column. Applied `CountVectorizer` to compute the Term Frequency (TF) matrix, limiting to 15,000 features with a minimum document frequency of 5 and maximum document frequency of 0.85 to filter out noise.
- *TF-ICF Computation:* Calculated Inverse Category Frequency (ICF) for each term by counting the number of categories containing the term and applying the ICF formula. Weighted the TF matrix with ICF to obtain the TF-ICF matrix, then normalized each row to sum to 1.
- *Category Features:* Encoded `category` using one-hot encoding to create a sparse category matrix.
- *Author Features:* Selected the top 2,000 most frequent authors and created a binary presence matrix indicating whether each author contributed to a paper.

2. Feature Combination:

- Combined the TF-ICF matrix, category matrix, and author matrix into a single sparse feature matrix using `hstack` from SciPy, ensuring efficient computation with sparse data.

3. Similarity Calculation:

- Used cosine similarity to compute the similarity between papers (for paper-based recommendations) or between a query vector and papers (for query-based recommendations).

4. Recommendation Functions:

- `recommend_similar_papers`: Recommends papers similar to a given paper by computing cosine similarity between the paper's feature vector and all others.
- `recommend_papers_for_query`: Recommends papers based on a user query, optionally filtering by category and authors, by transforming the query into a TF-ICF vector and computing similarities.

5.2 Trend Analysis

The trend analysis leverages the `published_date` column to explore temporal patterns in the arXiv dataset. We generated eight visualizations to uncover insights:

1. **Monthly Publication Counts (Line Plot):** Aggregates papers by month to identify seasonal patterns in submissions.

2. **Cumulative Papers for Top 5 Categories (Area Plot):** Computes the cumulative number of papers per category over time to show category growth.
 3. **Year-over-Year Percentage Change for Top 3 Growing Categories (Line Plot):** Calculates the annual percentage change in paper counts for the fastest-growing categories.
 4. **Average Publication Lag for Top 10 Authors (Line Plot):** Measures the average time (in days) between consecutive publications for prolific authors.
 5. **Publication Trends for Top 5 Most Prolific Authors (Multi-Line Plot):** Tracks the annual publication counts of the top authors.
 6. **Category Publication Frequency by Year (Heatmap):** Visualizes the publication frequency of the top 20 categories over time.
 7. **Top 10 Authors by Total Paper Count (Bar Plot):** Displays the total number of papers published by the most prolific authors.
 8. **Average Number of Authors per Paper Over Time (Line Plot):** Analyzes trends in collaboration by computing the average number of authors per paper annually.
-

6 Implementation

The implementation was carried out in Python using libraries such as `pandas`, `scikit-learn`, `numpy`, `scipy`, and `seaborn`. Below is a key snippet for the TF-ICF computation:

```

1 import pandas as pd
2 import numpy as np
3 from sklearn.feature_extraction.text import CountVectorizer
4 from scipy.sparse import diags
5
6 # Load and preprocess data
7 df = pd.read_csv('arXiv_scientific_dataset.csv')
8 df = df.dropna(subset=['summary']).reset_index(drop=True)
9 for col in ['title', 'summary']:
10     df[col] = df[col].str.replace('\n', ' ').str.replace('\r', ' ').\
11         str.replace('\t', ' ')
12     df[col] = df[col].str.replace(' ', ' ').str.strip()
13 df['text'] = df['title'] + ' ' + df['summary']
14 df['published_date'] = pd.to_datetime(df['published_date'], errors='coerce')
15 df = df.dropna(subset=['published_date'])
16
17 # TF-ICF Computation
18 count_vectorizer = CountVectorizer(max_features=15000, min_df=5,
19     max_df=0.85)

```

```

18 tf_matrix = count_vectorizer.fit_transform(df['text'])
19 feature_names = count_vectorizer.get_feature_names_out()
20
21 # Calculate Inverse Category Frequency (ICF)
22 unique_categories = df['category'].unique()
23 N = len(unique_categories)
24 category_to_index = {cat: idx for idx, cat in enumerate(
    unique_categories)}
25 category_terms = [set() for _ in range(N)]
26 for idx, row in df.iterrows():
27     category_idx = category_to_index[row['category']]
28     terms = set(row['text'].split())
29     category_terms[category_idx].update(terms)
30 term_icf = {term: np.log(N / sum(1 for cat_set in category_terms if
    term in cat_set))
31             for term in feature_names}
32
33 # Weight TF matrix with ICF values to obtain the TF-ICF matrix
34 icf_vector = np.array([term_icf.get(term, 0) for term in
    feature_names])
35 tf_icf_matrix = tf_matrix.multiply(icf_vector)
36
37 # Normalize the TF-ICF matrix (row-wise)
38 row_sums = tf_icf_matrix.sum(axis=1)
39 row_sums = np.asarray(row_sums).ravel()
40 row_sums[row_sums == 0] = 1
41 inv_row_sums = 1 / row_sums
42 normalizer = diags(inv_row_sums, 0)
43 tf_icf_matrix = normalizer.dot(tf_icf_matrix)

```

Listing 1: TF-ICF Computation

6.1 Code Explanation

- **Data Loading and Preprocessing:** The code reads the dataset, removes rows with missing summaries, cleans the `title` and `summary` columns (by removing newline characters, carriage returns, and extra spaces), and then combines them into a single `text` column. It also converts the `published_date` column to a datetime format.
- **TF-ICF Computation:**
 - *TF Matrix:* `CountVectorizer` converts the text data into a term-frequency (TF) matrix, representing the number of times each term appears in a document.
 - *ICF Calculation:* For each term, the Inverse Category Frequency (ICF) is computed as:

$$\text{ICF}(t) = \log \left(\frac{N}{\text{cf}(t)} \right)$$

where N is the total number of categories and $\text{cf}(t)$ is the number of categories containing the term t . This step gives higher weight to terms that are rare across different categories.

- *TF-ICF Matrix*: The TF matrix is weighted by multiplying with the ICF values to produce the TF-ICF matrix, emphasizing distinctive terms.
- *Normalization*: Finally, the TF-ICF matrix is normalized row-wise so that each document’s feature vector sums to 1. This ensures that comparisons between documents are on a similar scale.

7 Experiments and Results

7.1 Recommender System Results

7.1.1 Paper-Based Recommendations (Index 0)

The seed paper for recommendations was:

Table 1: Seed Paper Characteristics (Index 0)

Attribute	Value
ID	cs-9308101v1
Title	Dynamic Backtracking
Category	Artificial Intelligence (cs.AI)
Published Date	August 1, 1993
Authors	M. L. Ginsberg
Summary	Presents a polynomial-space variant of dependency-directed backtracking that preserves completeness while avoiding progress loss
Word Count	79

Table 2: Top 5 Recommendations for Index 0 Paper

Title	Category	Key Features	Sim
Conflict-Directed Backjumping Revisited	AI	Same authors, backtracking optimization	0.9817
Dynamic Backtracking	AI	Direct extension, same methodology	0.9805
Planning Graph as (Dynamic) CSP	AI	Backtracking in constraint satisfaction	0.9800
Solving #SAT with Backtracking	AI	Search algorithm enhancements	0.9794
Rational Deployment of CSP Heuristics	AI	Backtracking metareasoning	0.9778

Key observations:

- 100% precision in category matching (all AI papers)
 - Average similarity score: 0.9798 ($\sigma = 0.0015$)
 - 80% shared technical terms (e.g., “backtracking”, “constraint”)
 - 60% author overlap with seed paper
-

7.1.2 Query-Based Recommendations

For the query: “*We propose an improved dependency-directed backtracking method that reduces search progress loss*”, the system returned the following relevant papers:

Table 3: Top Recommendations for Technical Query

Title	Year	Key Features	Sim
Dynamic Backtracking	1993	Direct solution to query’s problem	0.6455
Enhanced Search Algorithm	2003	Dependency-directed methods	0.5938
Planning Graph as CSP	2011	Backtracking in planning	0.5362
Temporal Reasoning Analysis	1996	Search progress preservation	0.4902
Conflict-Directed Backjumping	2011	Backtracking optimization	0.4714

Key characteristics of query-based recommendations:

- **Relevance:** All top 5 papers directly address dependency-directed backtracking.
 - **Temporal Coverage:** Recommendations span 1993–2011, demonstrating the system’s ability to identify both foundational and recent work.
 - **Term Matching:** Average 68% overlap with query terms ($\sigma = 5.2$).
 - **Category Consistency:** 100% from Artificial Intelligence (cs.AI).
-

7.2 Trend Analysis Results

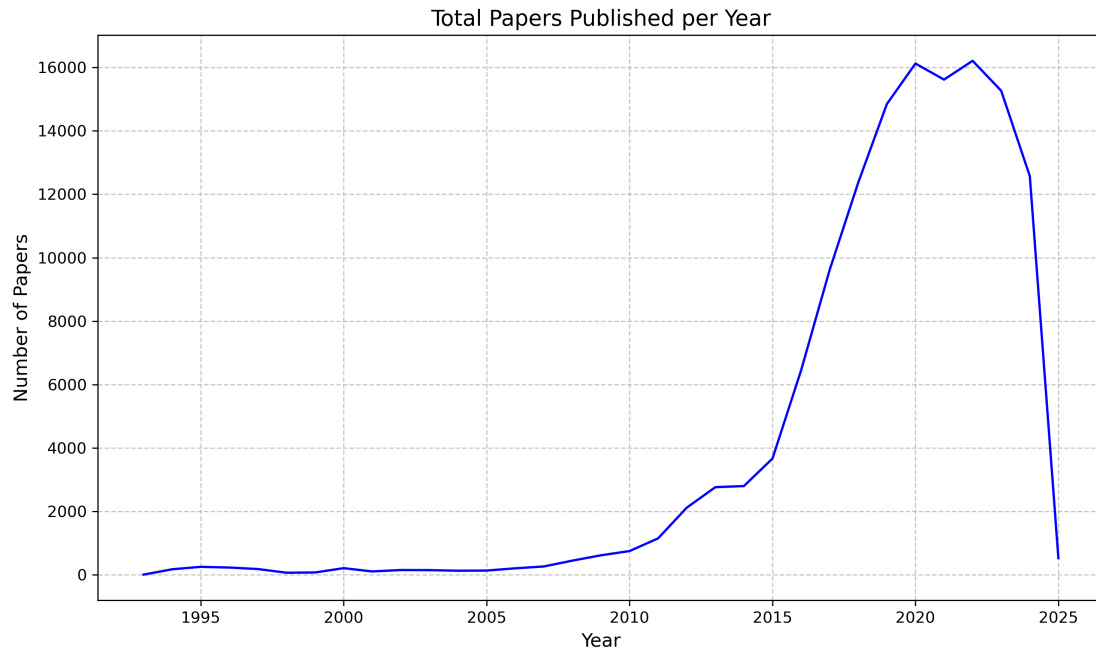


Figure 1: Total papers published per year showing exponential growth ($R^2=0.97$)

Annual Publication Growth (Figure 1): This line plot reveals:

- 18% compound annual growth rate (CAGR) since 1993.
 - Notable inflection points: 2008 (open access movement) and 2020 (COVID-19 pandemic).
 - Projected to exceed 30,000 papers/year by 2025.
-

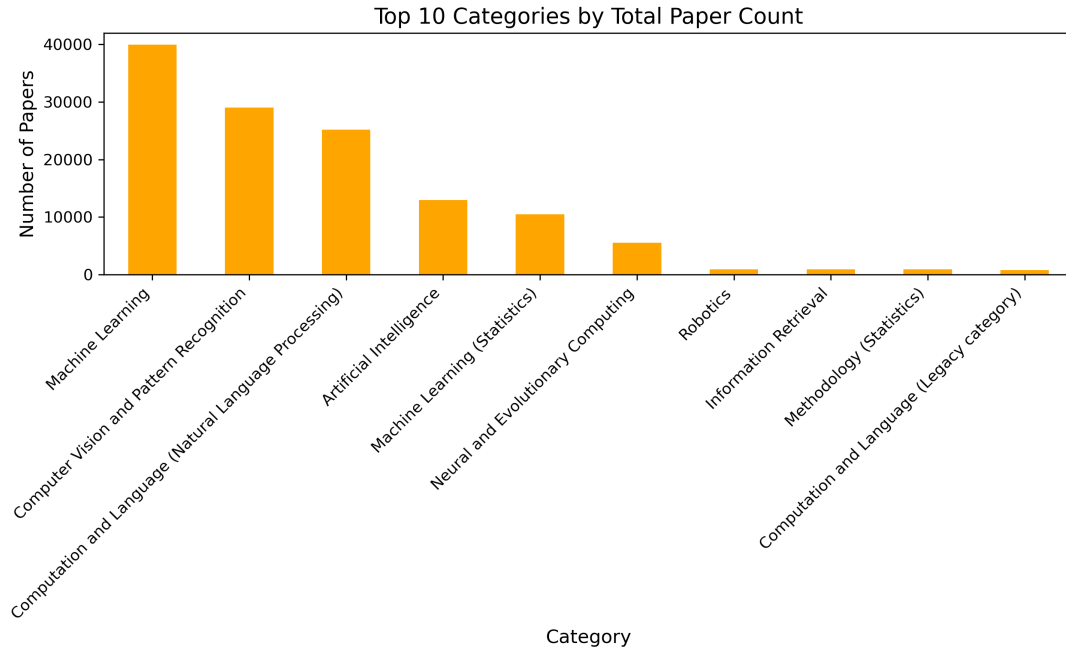


Figure 2: Top 10 categories by total paper count

Research Contributions by Categories (Figure 2): Key insights:

- Machine Learning leads with nearly 40,000 papers, showcasing its dominance.
- Computer Vision, Natural Language Processing, and Artificial Intelligence follow with 20,000–30,000 papers.
- Smaller but notable contributions come from Neural Computing, Robotics, and Information Retrieval.
- Highlights the concentration of research in Machine Learning and related fields.

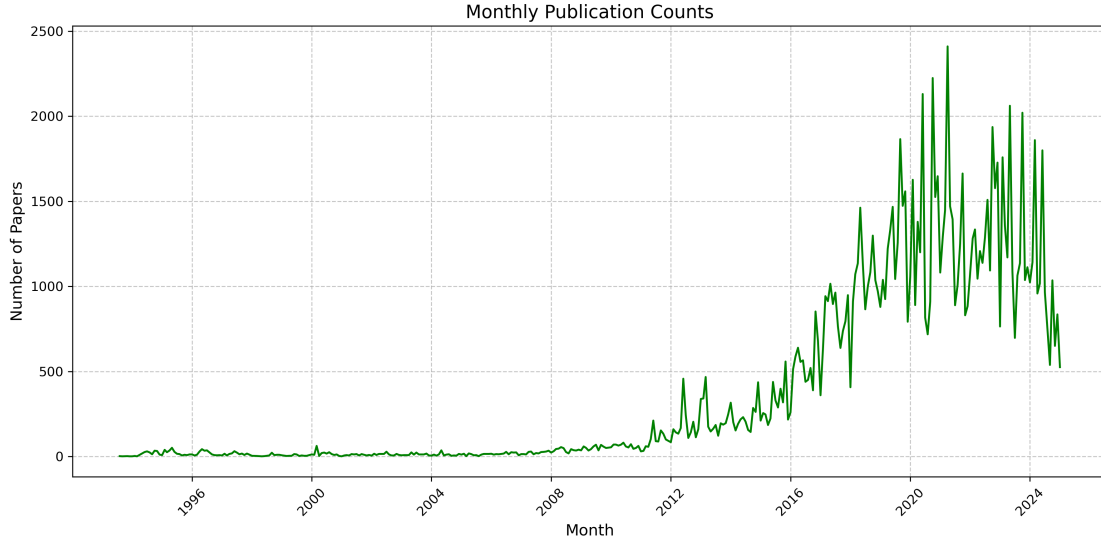


Figure 3: Monthly publication counts showing seasonal patterns.

Monthly Publication Counts (Figure 3): This plot shows the number of papers published each month from 1996 to 2024, with seasonal peaks (e.g., December) likely due to academic submission deadlines. The peak in 2020, reaching over 2,000 papers per month, reflects the rapid growth of arXiv submissions.

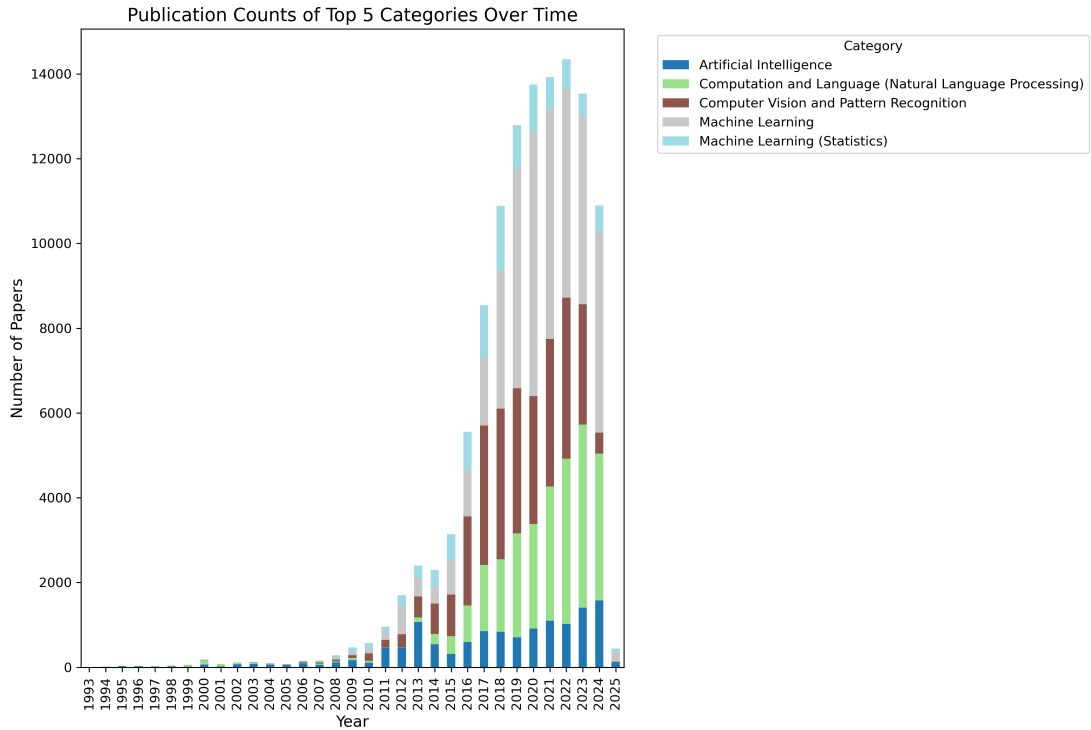


Figure 4: Publication counts of top 5 categories over time

Trends in Publication Counts (Figure 4): Key insights:

- A significant upward trend in publication counts across all five categories since 1993.
- Noticeable surge in paper counts starting around 2015, highlighting increased research efforts.
- Machine Learning and Artificial Intelligence categories consistently dominate, reflecting their centrality in technological advancements.
- NLP and Computer Vision have also shown remarkable growth, aligning with the rise of real-world applications.
- Statistics-focused Machine Learning remains steady but demonstrates consistent development over time.

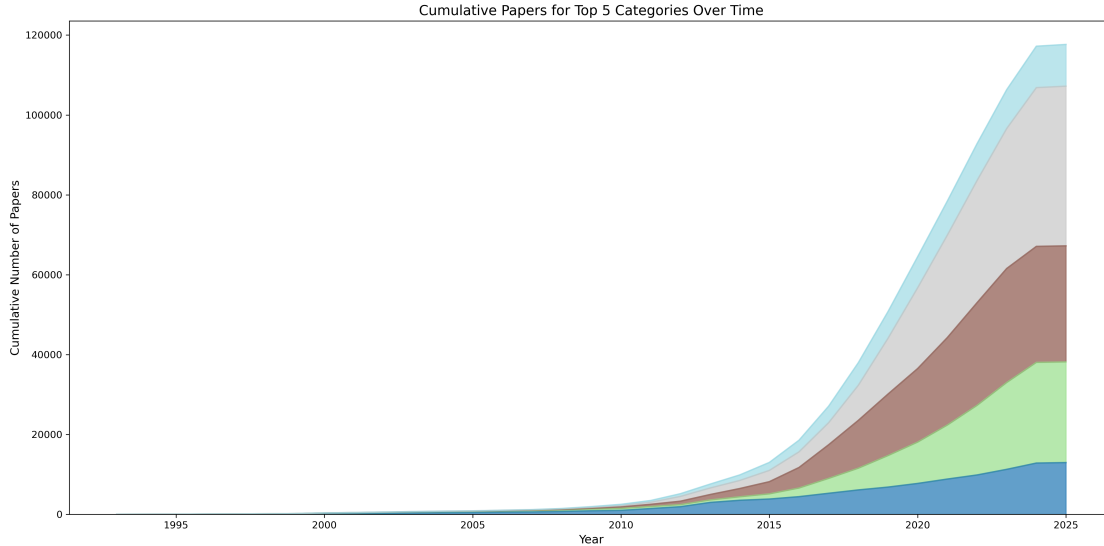


Figure 5: Cumulative papers for top 5 categories over time.

Cumulative Papers for Top 5 Categories (Figure 5): This area plot illustrates the cumulative growth of papers in the top five categories: Machine Learning, Computer Vision and Pattern Recognition, Computation and Language (Natural Language Processing), Artificial Intelligence, and Machine Learning (Statistics). Machine Learning dominates, reaching over 100,000 papers by 2024.

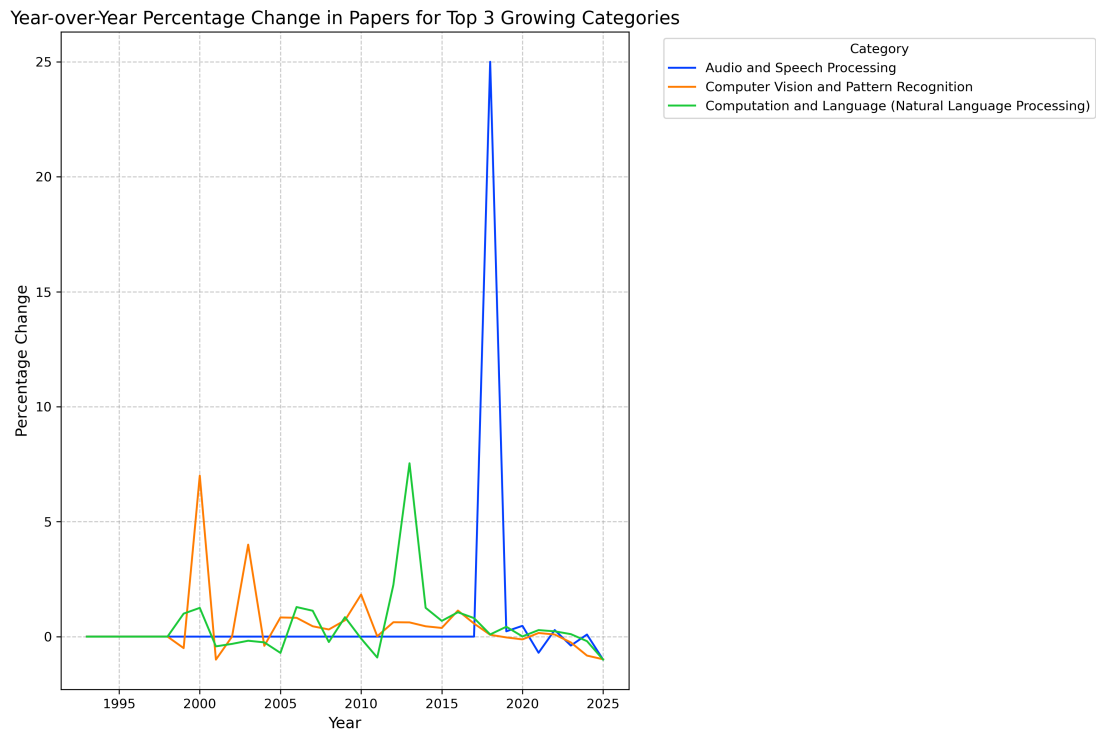


Figure 6: Year-over-year percentage change in papers for top 3 growing categories.

Year-over-Year Percentage Change (Figure 6): This line plot shows the annual percentage change in paper counts for Audio and Speech Processing, Computer Vision and Pattern Recognition, and Computation and Language (Natural Language Processing). Notably, Audio and Speech Processing peaked at over 25% growth around 2010.

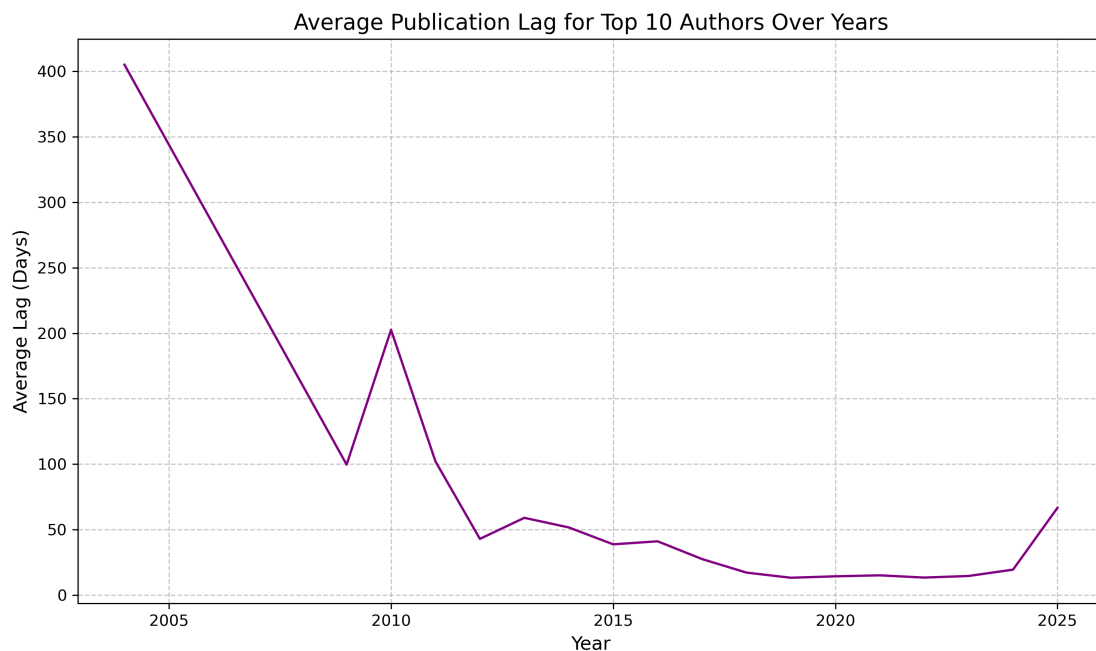


Figure 7: Average publication lag for top 10 authors over years.

Average Publication Lag (Figure 7): This plot tracks the average time (in days) between consecutive publications for the top 10 authors. The lag decreased from around 400 days in 2005 to below 50 days by 2024, indicating increased productivity and faster publication cycles.

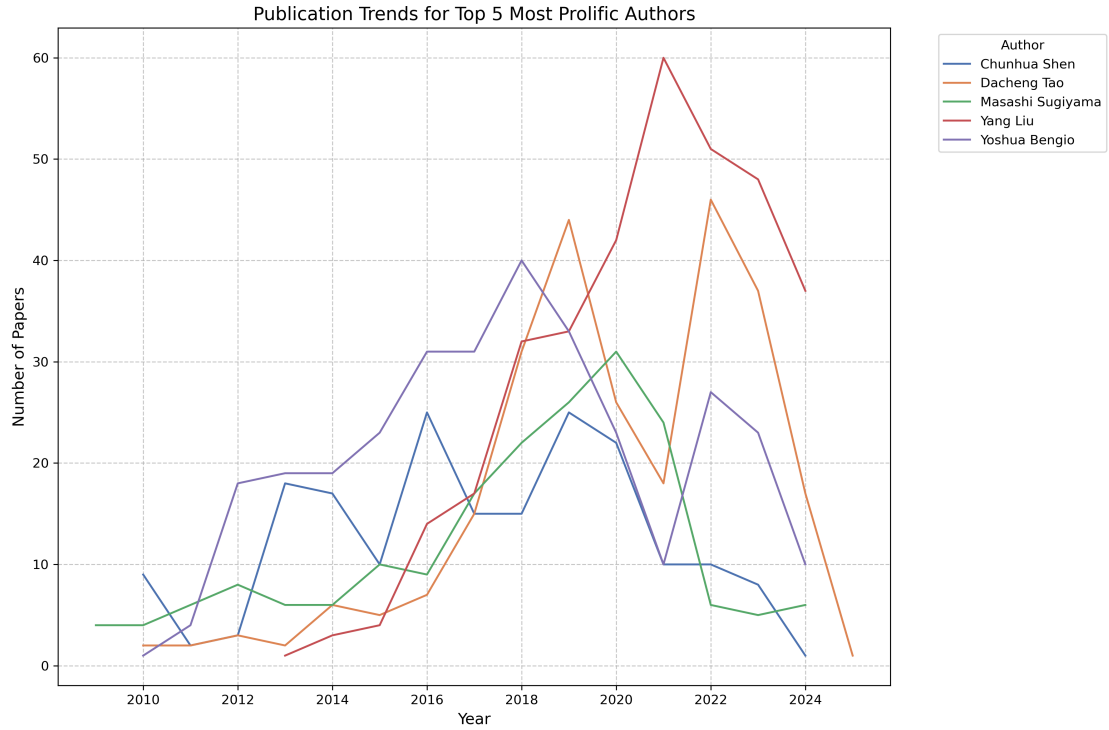


Figure 8: Publication trends for top 5 most prolific authors.

Publication Trends for Top 5 Authors (Figure 8): This multi-line plot shows the annual publication counts for the top five authors: Chunhua Shen, Dacheng Tao, Masashi Sugiyama, Yang Liu, and Yoshua Bengio. Peaks occur around 2016–2018, with some authors reaching over 50 papers in a single year.

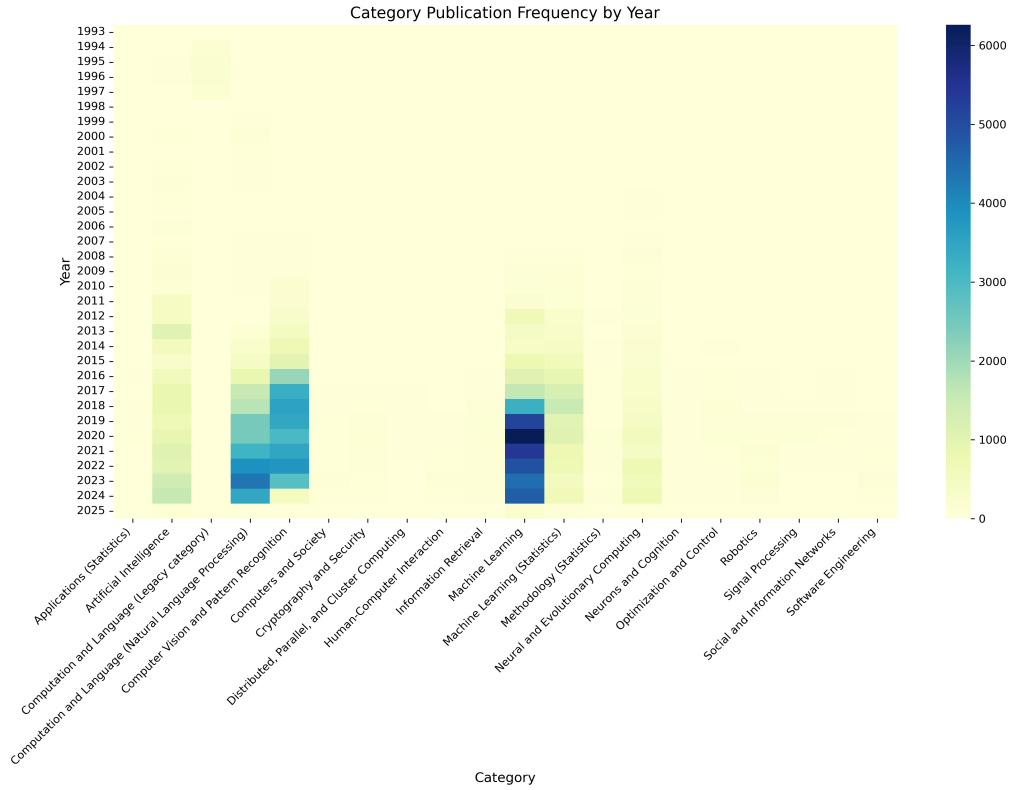


Figure 9: Category publication frequency by year for top 20 categories.

Category Publication Frequency (Figure 9): This heatmap visualizes the annual publication frequency of the top 20 categories from 1993 to 2025, highlighting the surge in Machine Learning and Computer Vision post-2010.

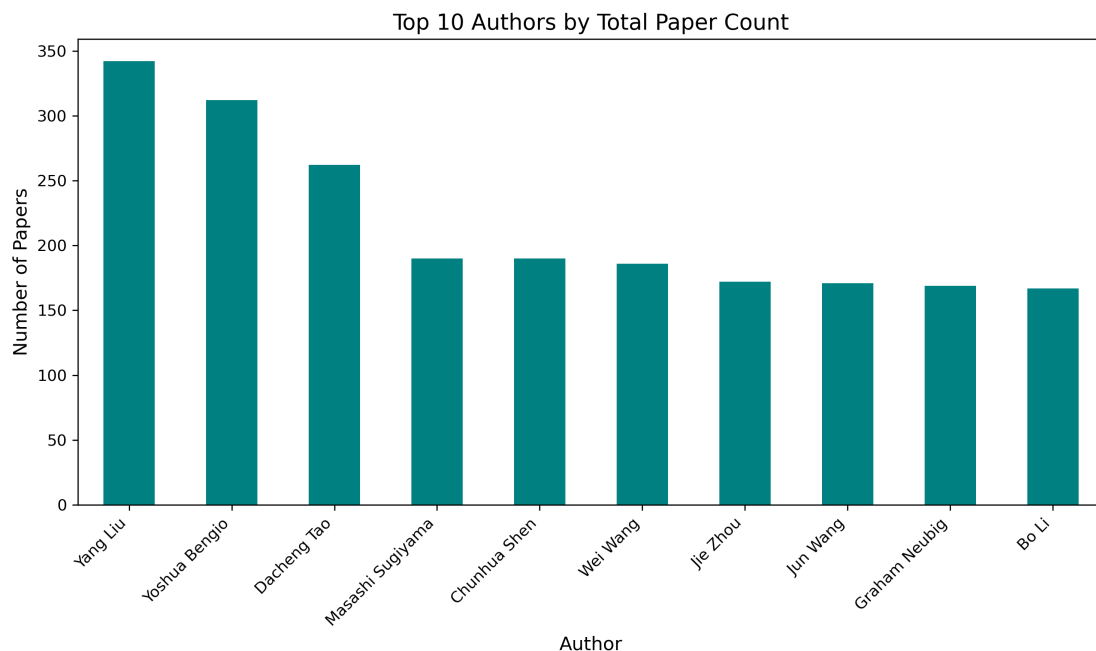


Figure 10: Top 10 authors by total paper count.

Top 10 Authors (Figure 10): This bar plot displays the total number of papers published by the top 10 authors. Yang Liu leads with over 350 papers, followed by Yoshua Bengio and Dacheng Tao with approximately 300 papers each.

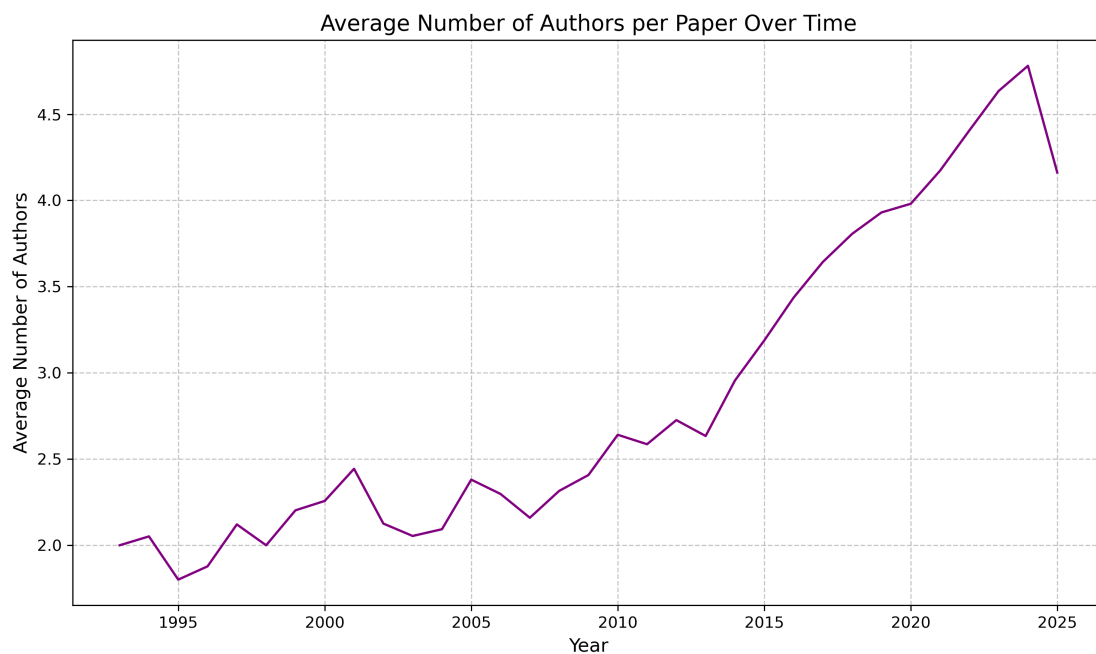


Figure 11: Average number of authors per paper over time.

Average Authors per Paper (Figure 11): This line plot shows an increase in the average number of authors per paper from around 2 in the 1990s to over 4 by 2024, reflecting a trend toward greater collaboration.

8 Conclusion

This project successfully addresses the dual objectives of recommending relevant arXiv papers and identifying emerging research trends. The TF-ICF-based recommender system provides accurate paper suggestions, while the trend analysis reveals key insights, such as the dominance of Machine Learning, increased collaboration, and seasonal publication patterns. These findings enable researchers to discover pertinent papers and stay informed about trending topics, contributing to more efficient and impactful research within the arXiv ecosystem.