
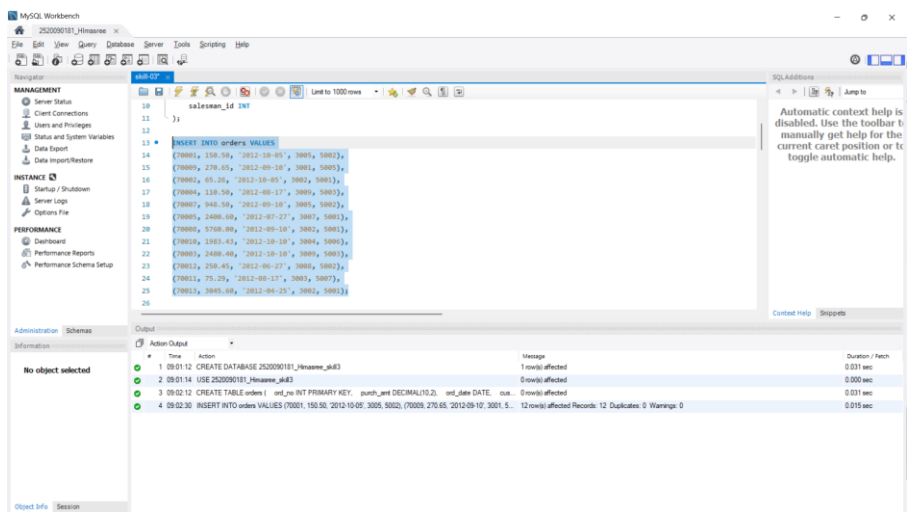
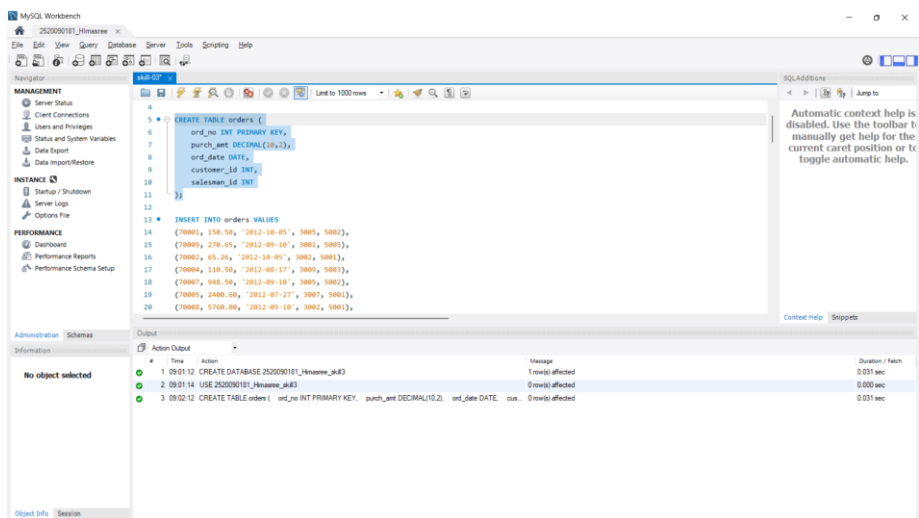


SKILL-03

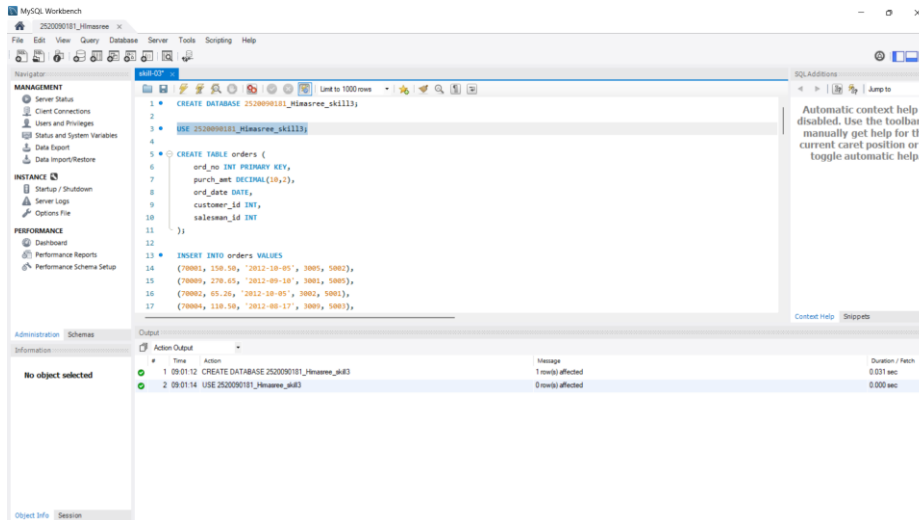

MySQL Workbench

252000181_Himasee

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

SQL Editor

Limit to 1000 rows

21 (70010, 1983.43, "2012-10-10", 3004, 5001),

22 (70003, 2400.40, "2012-10-10", 3009, 5003),

23 (70012, 550.45, "2012-06-27", 3009, 5002),

24 (70011, 75.25, "2012-08-17", 3001, 5007),

25 (70013, 3045.60, "2012-04-25", 3002, 5001),

26

27 SELECT *

Result Grid

ord_no	purch_amt	ord_date	customer_id	salesman_id
70003	2400.40	2012-10-10	3009	5003
70005	2400.60	2012-07-27	3007	5001
70008	5760.00	2012-09-10	3002	5001
70013	3045.60	2012-04-25	3002	5001

orders 1 x

Output

Action Output

#	Time	Action	Message	Duration / Patch
1	09:01:12	CREATE DATABASE 252000181_Himasee_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 252000181_Himasee_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001, 150.50, 2012-10-05, 3005, 5002), (70009, 270.65, 2012-09-10, 3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec

MySQL Workbench

252000181_Himasee

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

SQL Editor

Limit to 1000 rows

30

31 SELECT *

32 FROM orders

33 WHERE ord_date = "2012-09-10";

34

35 SELECT *

36 FROM orders

Result Grid

ord_no	purch_amt	ord_date	customer_id	salesman_id
70007	940.50	2012-09-10	3005	5002
70008	5760.00	2012-09-10	3002	5001
70009	270.65	2012-09-10	3001	5005

orders 2 x

Output

Action Output

#	Time	Action	Message	Duration / Patch
1	09:01:12	CREATE DATABASE 252000181_Himasee_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 252000181_Himasee_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001, 150.50, 2012-10-05, 3005, 5002), (70009, 270.65, 2012-09-10, 3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = 2012-09-10 LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec

MySQL Workbench

252000181_Himasee

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

SQL Editor

Limit to 1000 rows

33 WHERE ord_date = "2012-09-10";

34

35 SELECT *

36 FROM orders

37 WHERE salesman_id = 5001;

38

39 SELECT *

Result Grid

ord_no	purch_amt	ord_date	customer_id	salesman_id
70002	65.26	2012-10-05	3002	5001
70005	2400.60	2012-07-27	3007	5001
70008	5760.00	2012-09-10	3002	5001
70013	3045.60	2012-04-25	3002	5001

orders 3 x

Output

Action Output

#	Time	Action	Message	Duration / Patch
1	09:01:12	CREATE DATABASE 252000181_Himasee_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 252000181_Himasee_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001, 150.50, 2012-10-05, 3005, 5002), (70009, 270.65, 2012-09-10, 3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = 2012-09-10 LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec

MySQL Workbench

2520090181_Himansree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
36 FROM orders
37 WHERE salesman_id = 5001;
38
39 *
40 FROM orders
41 ORDER BY purch_amt DESC
42
```

Result Grid

ord_no	purch_amt	ord_date	customer_id	salesman_id
70008	5760.00	2012-09-10	3002	5001
70013	3045.60	2012-04-25	3002	5001
70003	2480.40	2012-10-10	3009	5001
70005	2400.60	2012-07-17	3007	5001
70010	1983.43	2012-10-10	3004	5006
70007	948.50	2012-09-10	3005	5002
70009	270.65	2012-09-10	3001	5005
70012	250.45	2012-06-27	3008	5002

orders 4 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	09:01:12	CREATE DATABASE 2520090181_Himansree_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 2520090181_Himansree_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001,150.50, 2012-10-05, 3005,5002, (70009, 270.65, 2012-09-10, 3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = 2012-09-10 LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

2520090181_Himansree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
42
43 * Execute the selected portion of the script or everything, if there is no selection
44 FROM orders;
45 ORDER BY ord_date ASC;
46
47 * SELECT SUM(purch_amt) AS total_revenue
48 FROM orders;

```

Result Grid

ord_no	purch_amt	ord_date	customer_id	salesman_id
70013	3045.60	2012-04-25	3002	5001
70012	250.45	2012-06-27	3008	5002
70005	2400.60	2012-07-17	3009	5001
70004	110.30	2012-04-17	3009	5003
70011	75.29	2012-08-17	3003	5007
70007	948.50	2012-09-10	3005	5002
70008	5760.00	2012-09-10	3002	5001
70009	270.65	2012-09-10	3001	5005

orders 5 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	09:01:12	CREATE DATABASE 2520090181_Himansree_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 2520090181_Himansree_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001,150.50, 2012-10-05, 3005,5002, (70009, 270.65, 2012-09-10, 3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = 2012-09-10 LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

2520090181_Himansree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
45 ORDER BY ord_date ASC;
46
47 * SELECT SUM(purch_amt) AS total_revenue
48 FROM orders;
49
50 * SELECT AVG(purch_amt) AS average_order
51 FROM orders;

```

Result Grid

total_revenue
17041.18

Result 6 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	09:01:12	CREATE DATABASE 2520090181_Himansree_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 2520090181_Himansree_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001,150.50, 2012-10-05, 3005,5002, (70009, 270.65, 2012-09-10, 3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = 2012-09-10 LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

2520090181_Himasee x

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

Limit to 1000 rows

SQL

```
43 ORDER BY end_date ASC;
44
45
46
47 SELECT SUM(purch_amt) AS total_revenue
48 FROM orders;
49
50
51 SELECT AVG(purch_amt) AS average_order
52 FROM orders;
```

Result Grid

total_revenue

17941.08

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Read Only

Context Help

Scriptlets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	09:01:12	CREATE DATABASE 2520090181_Himasee_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 2520090181_Himasee_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001,150.50,'2012-10-05',3005,5002),(70009,270.65,'2012-09-10',3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = '2012-09-10' LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

MySQL Workbench

2520090181_Himasee x

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

Limit to 1000 rows

SQL

```
48 FROM orders;
49
50 SELECT AVG(purch_amt) AS average_order
51 FROM orders;
52
53 SELECT MAX(purch_amt) AS highest_order
54 FROM orders;
```

Result Grid

average_order

1461.763000

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Read Only

Context Help

Scriptlets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
1	09:01:12	CREATE DATABASE 2520090181_Himasee_db3	1 row(s) affected	0.031 sec
2	09:01:14	USE 2520090181_Himasee_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, cu...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001,150.50,'2012-10-05',3005,5002),(70009,270.65,'2012-09-10',3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = '2012-09-10' LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

MySQL Workbench

2520090181_Himasee x

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

Limit to 1000 rows

SQL

```
51 FROM orders;
52
53 SELECT MAX(purch_amt) AS highest_order
54 FROM orders;
55
56 SELECT MIN(purch_amt) AS lowest_order
57 FROM orders;
```

Result Grid

highest_order

5760.00

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Read Only

Context Help

Scriptlets

Output

Action Output

#	Time	Action	Message	Duration / Fetch
2	09:01:14	USE 2520090181_Himasee_db3	0 row(s) affected	0.000 sec
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE, ...	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001,150.50,'2012-10-05',3005,5002),(70009,270.65,'2012-09-10',3001...	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = '2012-09-10' LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

MySQL Workbench

2520090181_Himasree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```

51 FROM orders;
52
53 * SELECT MAX(purch_amt) AS highest_order
54 FROM orders;
55
56 * SELECT MIN(purch_amt) AS lowest_order
57 FROM orders;

```

Result Grid

lowest_order
65.26

Output

#	Time	Action	Message	Duration / Fetch
3	09:02:12	CREATE TABLE orders (ord_no INT PRIMARY KEY, purch_amt DECIMAL(10,2), ord_date DATE,	0 row(s) affected	0.031 sec
4	09:02:30	INSERT INTO orders VALUES (70001,150.50,'2012-10-05',3005,5002),(70009,270.65,'2012-09-10',3001,	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = '2012-09-10' LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:00	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

2520090181_Himasree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```

54 FROM orders;
55
56 * SELECT MIN(purch_amt) AS lowest_order
57 FROM orders;
58
59 * SELECT COUNT(*) AS total_orders
60 FROM orders;

```

Result Grid

total_orders
12

Output

#	Time	Action	Message	Duration / Fetch
4	09:02:30	INSERT INTO orders VALUES (70001,150.50,'2012-10-05',3005,5002),(70009,270.65,'2012-09-10',3001,	12 row(s) affected Records: 12 Duplicates: 0 Warnings: 0	0.015 sec
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = '2012-09-10' LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:00	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

2520090181_Himasree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```

60 FROM orders;
61
62 * SELECT salesman_id,
63 SUM(purch_amt) AS total_sales
64 FROM
65 orders
66 GROUP BY salesman_id;

```

Result Grid

salesman_id	total_sales
1002	1949.45
5001	11271.96
5003	2590.90
5008	270.65
5006	1983.43
5007	75.20

Output

#	Time	Action	Message	Duration / Fetch
5	09:02:54	SELECT * FROM orders WHERE purch_amt > 2000 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
6	09:03:06	SELECT * FROM orders WHERE ord_date = '2012-09-10' LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:00	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.015 sec / 0.000 sec

Object Info Session

MySQL Workbench

252000181_Himasee

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
66 SELECT customer_id,
67 MAX(purch_amt) AS total_purchase
68 FROM orders
69 GROUP BY customer_id
70
71 SELECT customer_id,
```

Result Grid

customer_id	total_purchase
3005	1099.20
3002	8870.86
3009	2590.80
3007	2400.40
3001	270.65
3004	1983.43
3003	75.29
3008	250.45

Result 12

Output

Action Output

#	Time	Action	Message	Duration / Fetch
6	09:03:06	SELECT * FROM orders WHERE ord_date = '2012-09-10' LIMIT 0, 1000	3 row(s) returned	0.015 sec / 0.000 sec
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:08	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT 0, 1000	8 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

MySQL Workbench

252000181_Himasee

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
69 FROM orders
70 GROUP BY customer_id
71
72 SELECT customer_id,
73 MAX(purch_amt) AS highest_purchase
74 FROM orders
75 GROUP BY customer_id
```

Result Grid

customer_id	highest_purchase
3005	948.50
3002	5760.00
3009	2480.40
3007	2400.40
3001	270.65
3004	1983.43
3003	75.29
3008	250.45

Result 13

Output

Action Output

#	Time	Action	Message	Duration / Fetch
7	09:03:17	SELECT * FROM orders WHERE salesman_id = 5001 LIMIT 0, 1000	4 row(s) returned	0.000 sec / 0.000 sec
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:08	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT 0, 1000	8 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIMIT 0, 1000	8 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

MySQL Workbench

252000181_Himasee

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
72 SELECT customer_id,
73 MAX(purch_amt) AS highest_purchase
74 FROM orders
75 GROUP BY customer_id
76
77 SELECT salesman_id,
78 SUM(purch_amt) AS total_sales
```

Result Grid

salesman_id	total_sales
5001	11271.46

Result 14

Output

Action Output

#	Time	Action	Message	Duration / Fetch
8	09:03:29	SELECT * FROM orders ORDER BY purch_amt DESC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:08	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT 0, 1000	8 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIMIT 0, 1000	8 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING SUM(purch_amt) > 10000	1 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

MySQL Workbench

2520090181_Himansree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
81 HAVING SUM(purch_amt) > 30000)
82
83 SELECT customer_id,
84 SUM(purch_amt) AS total_purchase
85 FROM orders
86 GROUP BY customer_id
87 HAVING SUM(purch_amt) > 25000
```

Result Grid

customer_id	total_purchase
3002	8870.86
3009	2590.90

Result 15 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
9	09:03:52	SELECT * FROM orders ORDER BY ord_date ASC LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:08	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT...	8 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIM...	8 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING S...	1 row(s) returned	0.000 sec / 0.000 sec
19	09:06:27	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	2 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

2520090181_Himansree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
87 HAVING SUM(purch_amt) > 25000)
88
89 SELECT customer_id,
90 COUNT(*) AS total_orders
91 FROM orders
92 GROUP BY customer_id
93 HAVING COUNT(*) > 1
```

Result Grid

customer_id	total_orders
3005	2
3002	3
3009	2

Result 16 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
10	09:04:06	SELECT SUM(purch_amt) AS total_revenue FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:08	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT...	8 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIM...	8 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING S...	1 row(s) returned	0.000 sec / 0.000 sec
19	09:06:27	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	2 row(s) returned	0.000 sec / 0.000 sec
20	09:06:38	SELECT customer_id, COUNT(*) AS total_orders FROM orders GROUP BY customer_id HAVING COUNT...	3 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

2520090181_Himansree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```
93 HAVING COUNT(*) > 1)
94
95 SELECT customer_id,
96 SUM(purch_amt) AS total_purchase
97 FROM orders
98 GROUP BY customer_id
99 HAVING SUM(purch_amt) > 10000
```

Result Grid

customer_id	total_purchase
3005	1099.00
3002	8870.86
3009	2590.90
3007	2400.40
3004	1063.40

Result 17 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
11	09:04:42	SELECT AVG(purch_amt) AS average_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
12	09:04:53	SELECT MAX(purch_amt) AS highest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
13	09:05:08	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT...	8 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIM...	8 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING S...	1 row(s) returned	0.000 sec / 0.000 sec
19	09:06:27	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	2 row(s) returned	0.000 sec / 0.000 sec
20	09:06:38	SELECT customer_id, COUNT(*) AS total_orders FROM orders GROUP BY customer_id HAVING COUNT...	3 row(s) returned	0.000 sec / 0.000 sec
21	09:06:49	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	5 row(s) returned	0.000 sec / 0.000 sec

Object Info Session

MySQL Workbench

252090181_Himanshu

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```

99  HAVING SUM(purch_amt) > 1000
100 ORDER BY total_purchase DESC;
101
102 * SELECT customer_id,
103     MAX(purch_amt) AS max_purchase
104 FROM orders
105 GROUP BY customer_id

```

Result Grid

customer_id	max_purchase
3002	5760.00
3009	2480.40
3007	2400.60

Output

Action Output

#	Time	Action	Message	Duration / Fetch
13	09:05:00	SELECT MIN(purch_amt) AS lowest_order FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT...	6 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIMIT...	6 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING S...	1 row(s) returned	0.000 sec / 0.000 sec
19	09:06:27	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	2 row(s) returned	0.000 sec / 0.000 sec
20	09:06:38	SELECT customer_id, COUNT(*) AS total_orders FROM orders GROUP BY customer_id HAVING COUNT...	3 row(s) returned	0.000 sec / 0.000 sec
21	09:06:49	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	5 row(s) returned	0.000 sec / 0.000 sec
22	09:07:05	ORDER BY total_purchase DESC	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL se...	0.000 sec
23	09:07:10	SELECT customer_id, MAX(purch_amt) AS max_purchase FROM orders GROUP BY customer_id HAVIN...	3 row(s) returned	0.000 sec / 0.000 sec

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

MySQL Workbench

252090181_Himanshu

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```

105 GROUP BY customer_id
106 HAVING MAX(purch_amt) BETWEEN 2000 AND 6000;
107
108 * SELECT salesman_id,
109     COUNT(*) AS total_orders
110 FROM orders
111 GROUP BY salesman_id

```

Result Grid

salesman_id	total_orders
5002	3
5001	4
5003	2

Output

Action Output

#	Time	Action	Message	Duration / Fetch
14	09:05:20	SELECT COUNT(*) AS total_orders FROM orders LIMIT 0, 1000	1 row(s) returned	0.000 sec / 0.000 sec
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT...	6 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIM...	6 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING S...	1 row(s) returned	0.000 sec / 0.000 sec
19	09:06:27	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	2 row(s) returned	0.000 sec / 0.000 sec
20	09:06:38	SELECT customer_id, COUNT(*) AS total_orders FROM orders GROUP BY customer_id HAVING COUNT...	3 row(s) returned	0.000 sec / 0.000 sec
21	09:06:49	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	5 row(s) returned	0.000 sec / 0.000 sec
22	09:07:05	ORDER BY total_purchase DESC	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL se...	0.000 sec
23	09:07:10	SELECT customer_id, MAX(purch_amt) AS max_purchase FROM orders GROUP BY customer_id HAVIN...	3 row(s) returned	0.000 sec / 0.000 sec
24	09:07:20	SELECT salesman_id, COUNT(*) AS total_orders FROM orders GROUP BY salesman_id HAVING COUN...	3 row(s) returned	0.000 sec / 0.000 sec

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

MySQL Workbench

252090181_Himanshu

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

SQL Editor

```

108 * SELECT salesman_id,
109     COUNT(*) AS total_orders
110 FROM orders
111 GROUP BY salesman_id
112 HAVING COUNT(*) >= 2;
113
114 * SELECT ord_date,

```

Result Grid

ord_date	highest_purchase
2012-10-10	2480.40
2012-07-27	2400.60
2012-09-10	5760.00
2012-04-25	3045.60

Output

Action Output

#	Time	Action	Message	Duration / Fetch
15	09:05:31	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id LIMIT 0, 1...	6 row(s) returned	0.016 sec / 0.000 sec
16	09:05:45	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT...	6 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIM...	6 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING S...	1 row(s) returned	0.000 sec / 0.000 sec
19	09:06:27	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	2 row(s) returned	0.000 sec / 0.000 sec
20	09:06:38	SELECT customer_id, COUNT(*) AS total_orders FROM orders GROUP BY customer_id HAVING COUNT...	3 row(s) returned	0.000 sec / 0.000 sec
21	09:06:49	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVIN...	5 row(s) returned	0.000 sec / 0.000 sec
22	09:07:05	ORDER BY total_purchase DESC	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL se...	0.000 sec
23	09:07:10	SELECT customer_id, MAX(purch_amt) AS max_purchase FROM orders GROUP BY customer_id HAVIN...	3 row(s) returned	0.000 sec / 0.000 sec
24	09:07:20	SELECT salesman_id, COUNT(*) AS total_orders FROM orders GROUP BY salesman_id HAVING COUN...	3 row(s) returned	0.000 sec / 0.000 sec
25	09:07:35	SELECT ord_date, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY ord_date HAVING M...	4 row(s) returned	0.000 sec / 0.000 sec

SQL Additions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

MySQL Workbench

2520090181_Hinasree

File Edit View Query Database Server Tools Scripting Help

Navigator

MANAGEMENT

- Server Status
- Client Connections
- Users and Privileges
- Status and System Variables
- Data Export
- Data Import/Restore

INSTANCE

- Startup / Shutdown
- Server Logs
- Options File

PERFORMANCE

- Dashboard
- Performance Reports
- Performance Schema Setup

Administration Schemas

Information

No object selected

Object Info Session

SQL Editor

Limit to 1000 rows

```
114 SELECT ord_date,
115 MAX(purch_amt) AS highest_purchase
116 FROM orders
117 GROUP BY ord_date
118 HAVING MAX(purch_amt) > 2000;
119
120 SELECT *
```

Result Grid

ord_no	purch_amt	ord_date	customer_id	salesman_id
70001	150.50	2012-10-05	3005	5002
70002	65.26	2012-10-05	3002	5001
70003	2480.40	2012-10-10	3009	5003
70004	110.50	2012-09-17	3009	5003
70005	2400.60	2012-07-27	3007	5001
70007	948.50	2012-09-10	3005	5002
70008	5760.00	2012-09-10	3002	5001
70009	270.65	2012-09-10	3001	5005

orders 21 x

Output

Action Output

#	Time	Action	Message	Duration / Fetch
16	09:05:46	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id LIMIT 10	8 row(s) returned	0.000 sec / 0.000 sec
17	09:05:57	SELECT customer_id, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY customer_id LIMIT 10	8 row(s) returned	0.000 sec / 0.000 sec
18	09:06:13	SELECT salesman_id, SUM(purch_amt) AS total_sales FROM orders GROUP BY salesman_id HAVING SUM(purch_amt) > 2000	1 row(s) returned	0.000 sec / 0.000 sec
19	09:06:27	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVING SUM(purch_amt) > 2000	2 row(s) returned	0.000 sec / 0.000 sec
20	09:06:30	SELECT customer_id, COUNT(*) AS total_orders FROM orders GROUP BY customer_id HAVING COUNT(*) > 10	3 row(s) returned	0.000 sec / 0.000 sec
21	09:06:49	SELECT customer_id, SUM(purch_amt) AS total_purchase FROM orders GROUP BY customer_id HAVING SUM(purch_amt) > 2000	5 row(s) returned	0.000 sec / 0.000 sec
22	09:07:05	ORDER BY total_purchase DESC	Error Code: 1064. You have an error in your SQL syntax; check the manual that corresponds to your MySQL server version for the right syntax to use near 'ORDER BY total_purchase DESC' at line 1	0.000 sec
23	09:07:10	SELECT customer_id, MAX(purch_amt) AS max_purchase FROM orders GROUP BY customer_id HAVING MAX(purch_amt) > 2000	3 row(s) returned	0.000 sec / 0.000 sec
24	09:07:20	SELECT salesman_id, COUNT(*) AS total_orders FROM orders GROUP BY salesman_id HAVING COUNT(*) > 10	3 row(s) returned	0.000 sec / 0.000 sec
25	09:07:35	SELECT ord_date, MAX(purch_amt) AS highest_purchase FROM orders GROUP BY ord_date HAVING MAX(purch_amt) > 2000	4 row(s) returned	0.000 sec / 0.000 sec
26	09:07:51	SELECT * FROM orders LIMIT 0, 1000	12 row(s) returned	0.000 sec / 0.000 sec

SQLAdditions

Automatic context help is disabled. Use the toolbar to manually get help for the current caret position or to toggle automatic help.

Result Grid

Form Editor

Apply Revert Context Help Snippets