

Topic: Server Side Configuration

Oracle Net Listener:

Oracle net listeners play a crucial role in managing connections between clients and oracle database.

What is listener? → first point of contact for client

⇒ A listener is a process on the database server that handles connection request from clients

⇒ it listens for incoming client connection requests and manage the traffic to the database server

Listener configuration file:

⇒ The listener.ora file list the names and addresses of all listener processes and instance they support.


DATE: 1/1/20

MTWTFSS

Structure of the listener.ora:

⇒ Consist of four main parts:

- Header section
- Protocol Address list
- instance definitions
- Operational parameters

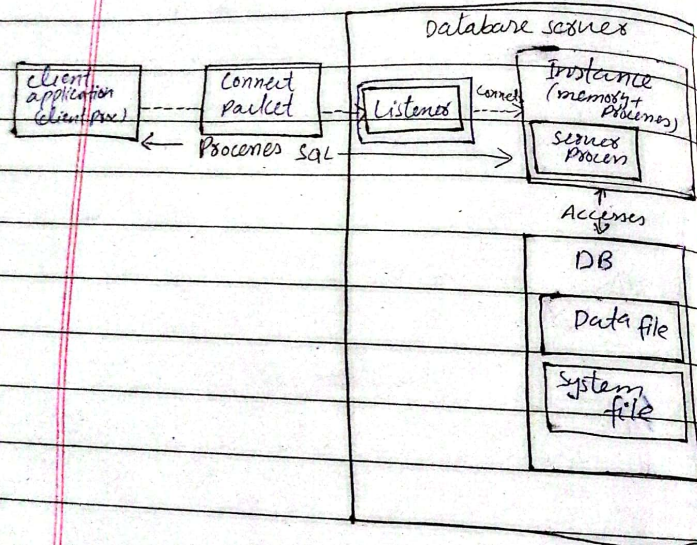

DATE: 1/1/20

MTWTFSS

Starting the listener servicesProcess:

⇒ The listener process in Oracle is managed using the listener control utility, that is executed with 'lsnrctl' command.

⇒ Here, are the following step to starting and managing the listener process:

Starting the listener:

◦ lsnrctl start

Checking listener status: / Verify:

◦ lsnrctl status

⇒ This will display info:

- listener alias
- version info
- Start date and uptime
- Trace level
- Security status
- log file location
- parameter file location

DATE: 1/1/20

MTWTFSS

Checking for other listeners:

- o Isnsell status my-lsnrs

Key functions of Listener:

- ⇒ Listening for connections
- ⇒ Service registration
- ⇒ Routing requests

DATE: 1/1/20

MTWTFSS

Configure the Listener

→ The Oracle net configuration assistant help set up listeners easily and quickly.

Steps to configure the listener:

1. Start the assistant:

Open the Oracle net

configuration assistant tool.

2. Select listener configuration:

Choose the option to configure a listener. You can add, reconfigure, delete or rename a listener.

3. Add a listener:

Enter the name for the listener. The default name is LISTENER.

4. Select a protocol:

Choose the protocol that listener will use to communicate. The default is TCP.

DATE: 20/09/2020

MTWTFSS

Enter port no that listener will use. Default is 1521.

⇒ The listener can be configured in two ways:
in the following two ways:

Static service configuration:

⇒ Used for Oracle 8 or earlier.
Requires LISTENER.ORA configuration.
Required for OEM and other services.

Dynamic service registration:

⇒ Does not require a listener.ora file.
The listener relies on the PMON process.

DATE: 1/1/20

MTWTFSS

Creating Listener

Using command line:
Edit the listener.ora file.

LISTENER =

(DESCRIPTION_LIST =

(DESCRIPTION =

(ADDRESS = (PROTOCOL = TCP)

(HOST = <host-name or IP address>

(PORT = 1521))

)

)

⇒, lsnrctl start LISTENER

Managing the Listener

Start the Listener:

lsnrctl start LISTENER

Stop the Listener:

lsnrctl stop LISTENER

DATE: / / 20

(M) (T) (W) (T) (F) (S)

check listener status

lsnactl status LISTENER

Reload configuration

lsnactl reload LISTENER

Get help:

lsnactl help

change the listener parameters

lsnactl SET txc-level ADMIN

Display the value of parameters

lsnactl SHOW txc-directory

Control a non-default listener

lsnactl set current listener

listener 02